
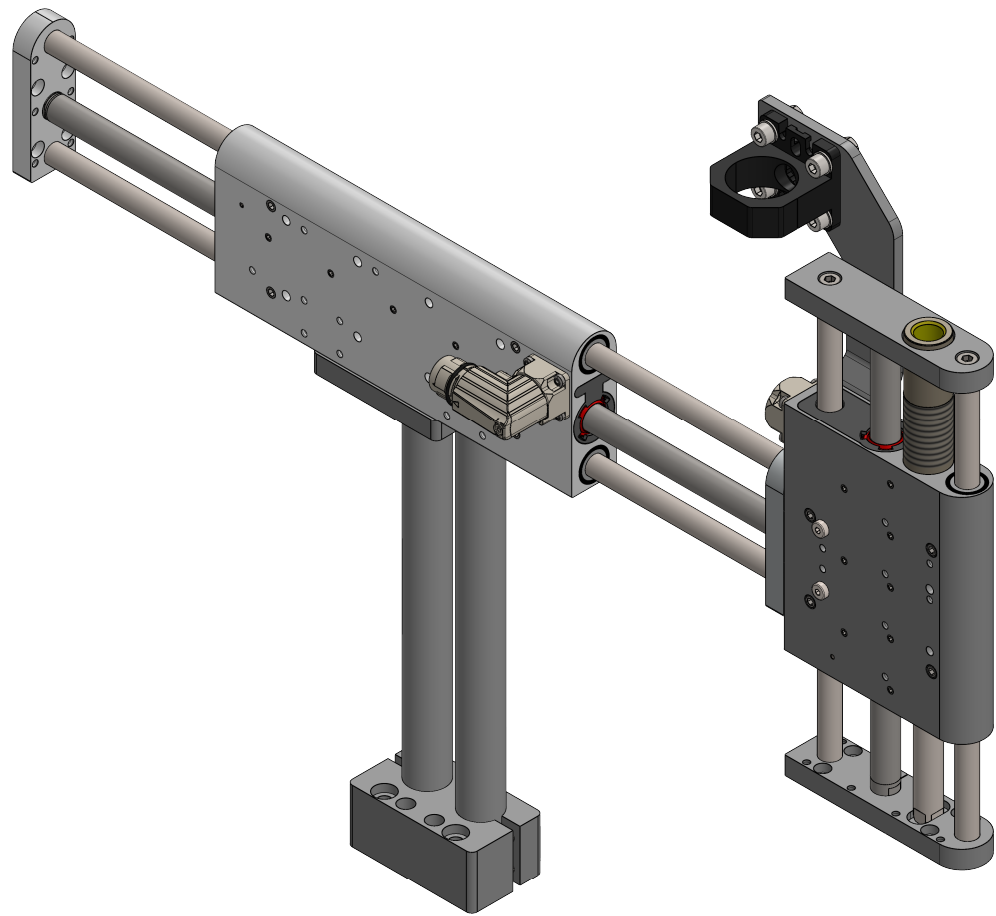
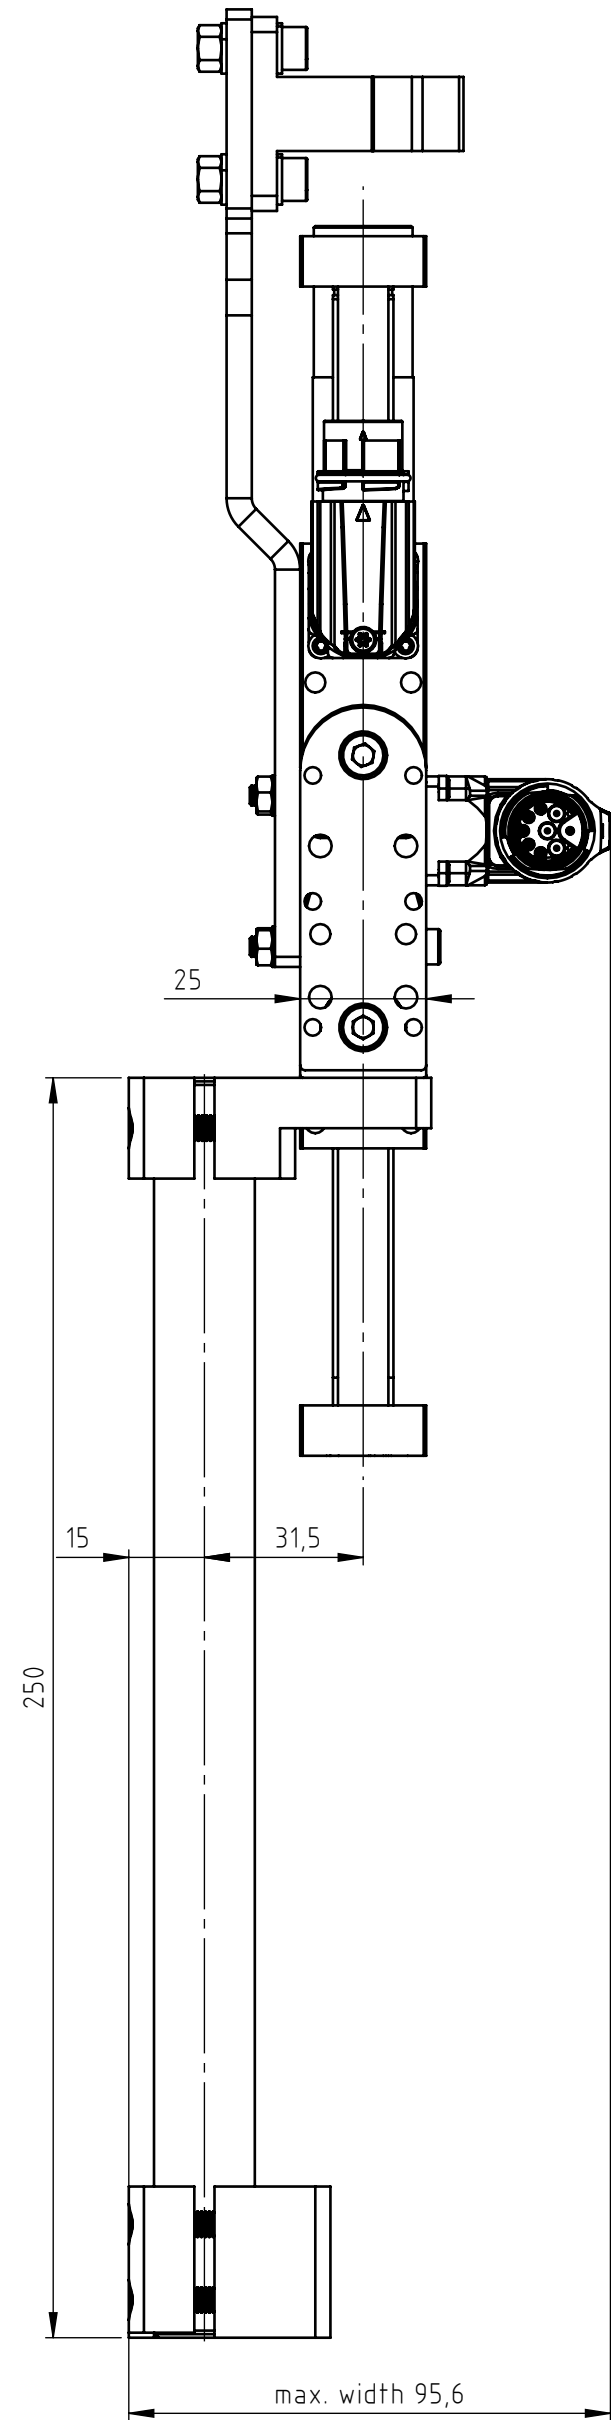



The copyright to this document, which is personally entrusted to the recipient, remains with our company. Without our written permission, the document may not be copied nor reproduced nor communicated or made accessible to third parties without our written permission.

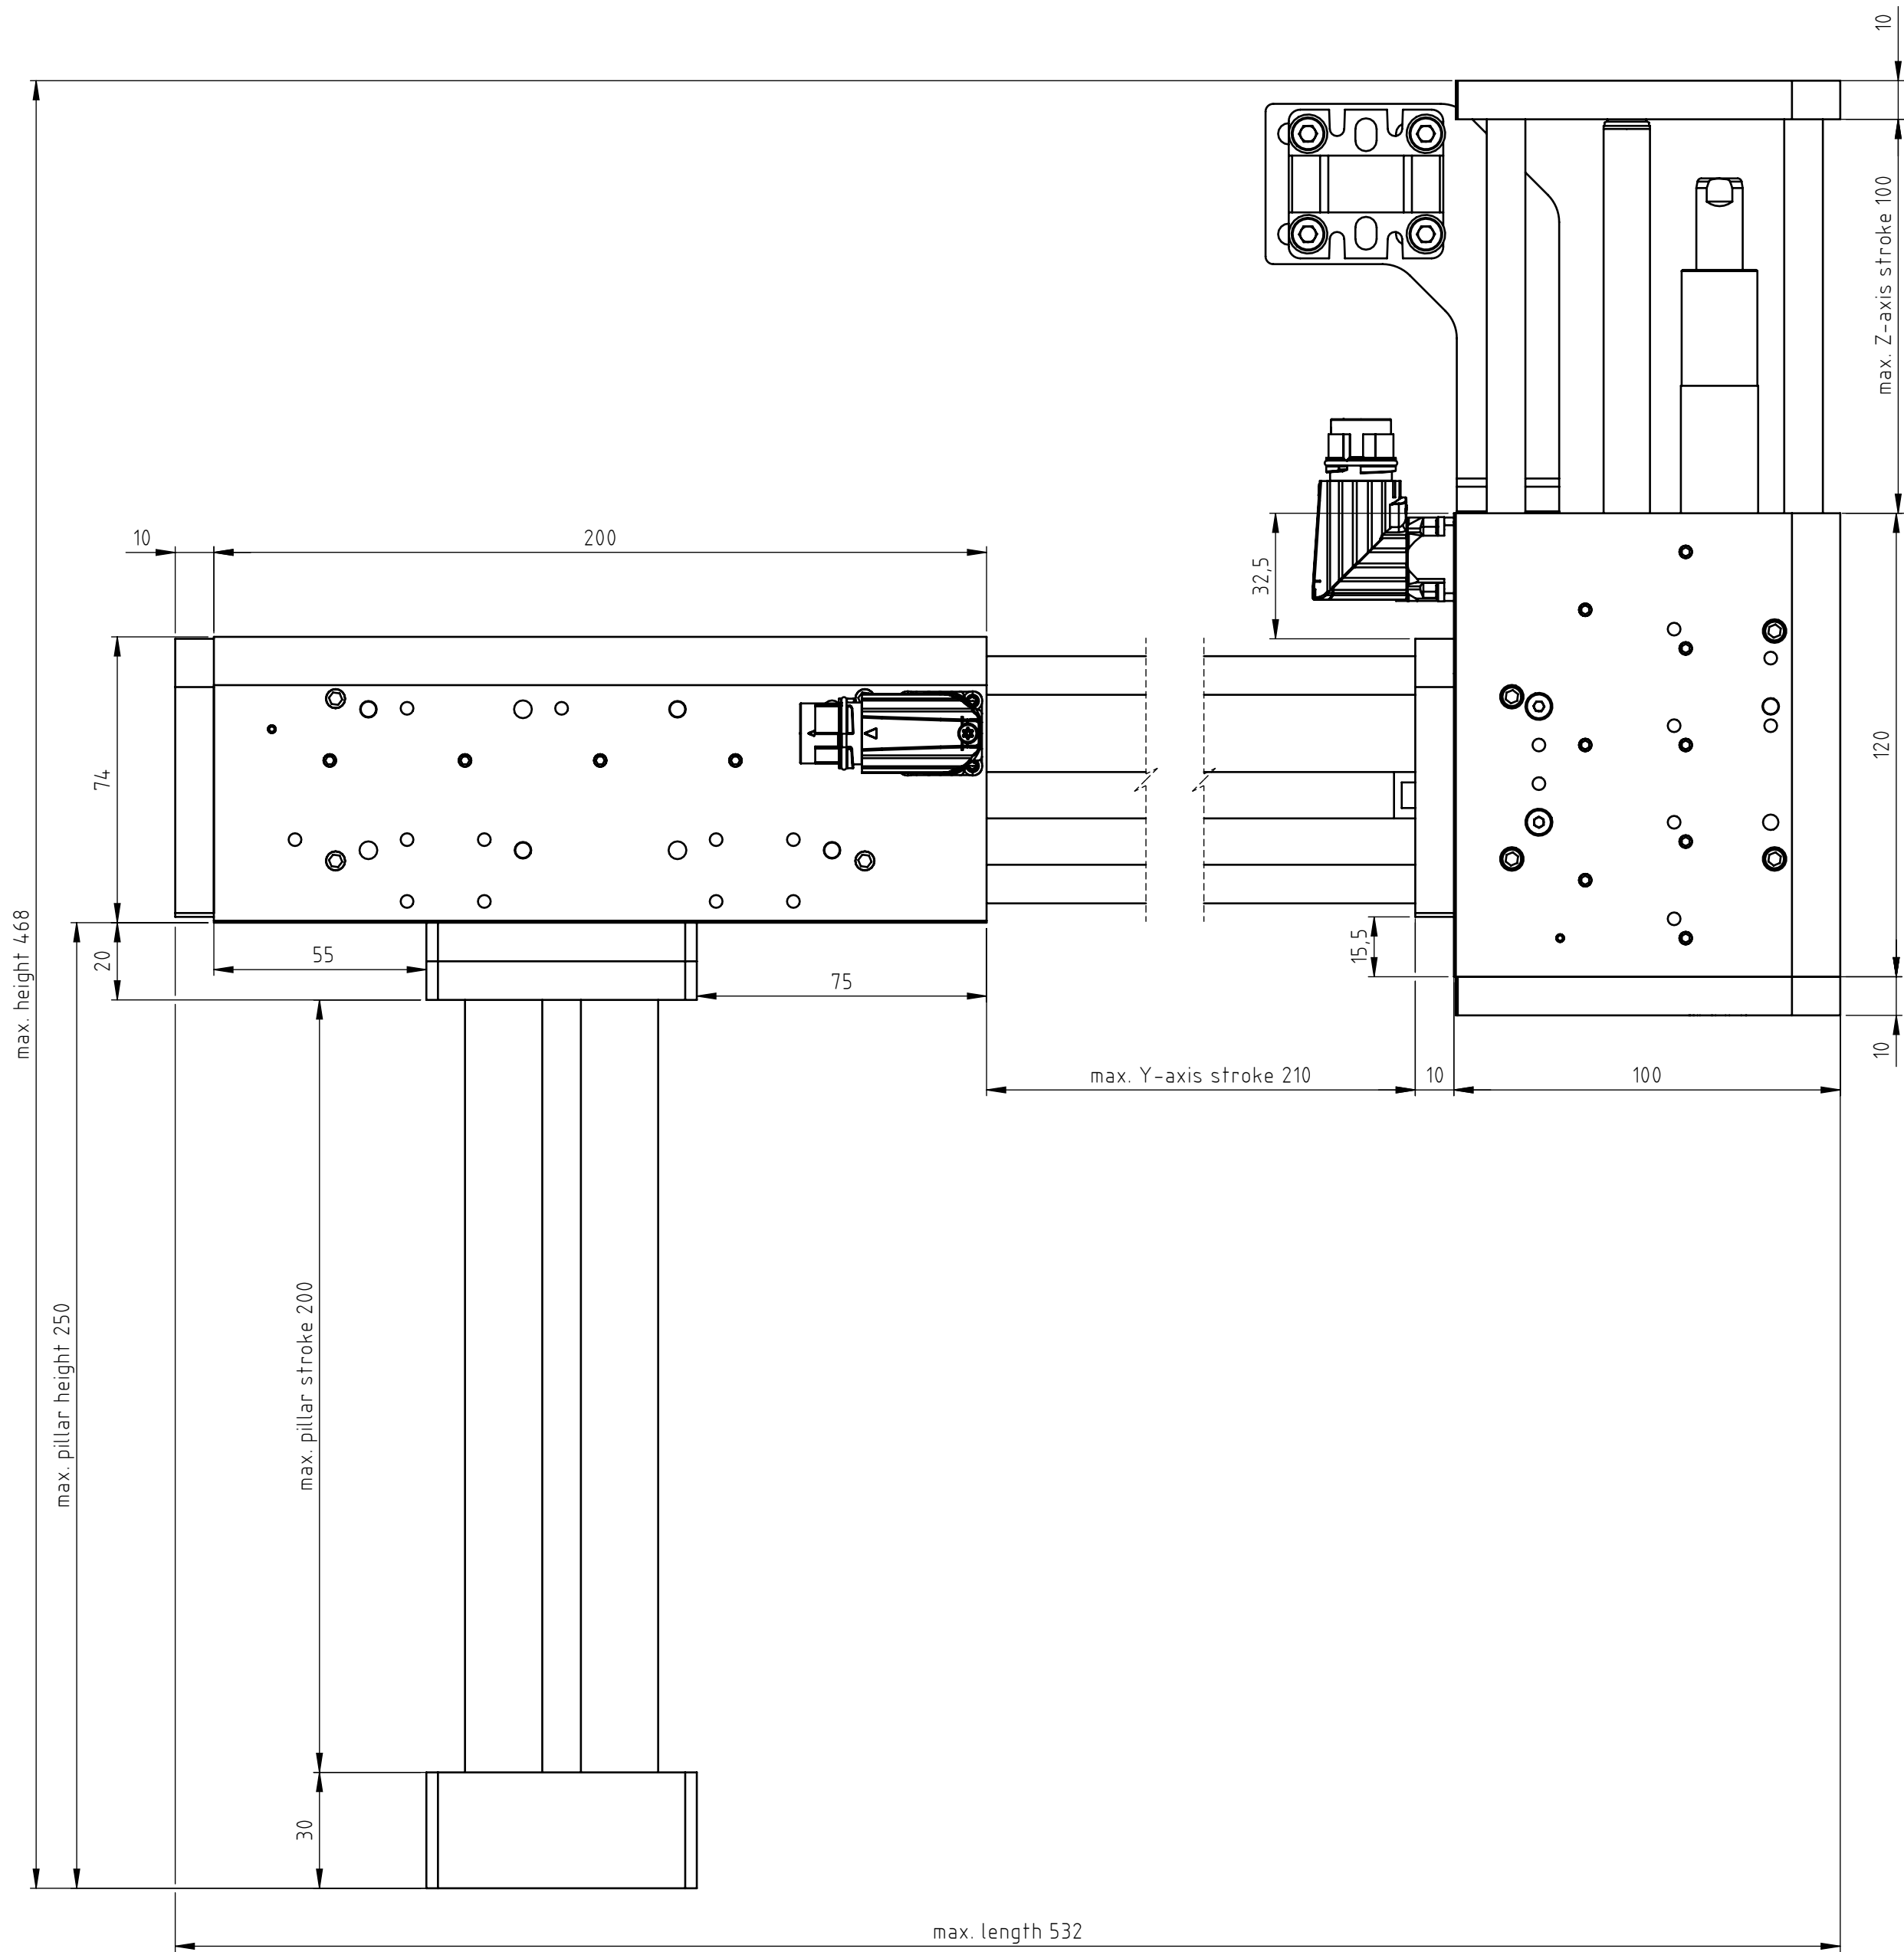

A	Document created	27.08.2025	JB	FH
Rev.	Change	Date	Author	Appr.

General tolerance DIN ISO 2768 - mK	Created by J.-E. Beekhuis	Status 27.08.2025/jb	Material	
LinMot®	File name 0380-0086_PP03_210-23x160H_100-23x80F-MS11_MT01_TC01	Title, additional title PP03_210-23x160H_ 100-23x80F-MS11_MT01_TC01		☐ Safety Rel. ☐ UL-Rel.
NTI AG LinMot & MagSpring Bodenaeckerstrasse 2 CH-8957 Spreitenbach	Template type: SW2020 Version: V1-1 SW_A2_hori_Sheet_format_V1-1	Document type Assembly drawing Drawing number / Index 0380-0086A		Weight (g)
Art.No: 0300-0017		Scale 2:3		Sheet 1 / 3
				A2

The copyright to this document, which is personally entrusted to the recipient, remains with our company. Without our written permission, the document may not be copied nor reproduced nor communicated or made accessible to third parties without our written permission.

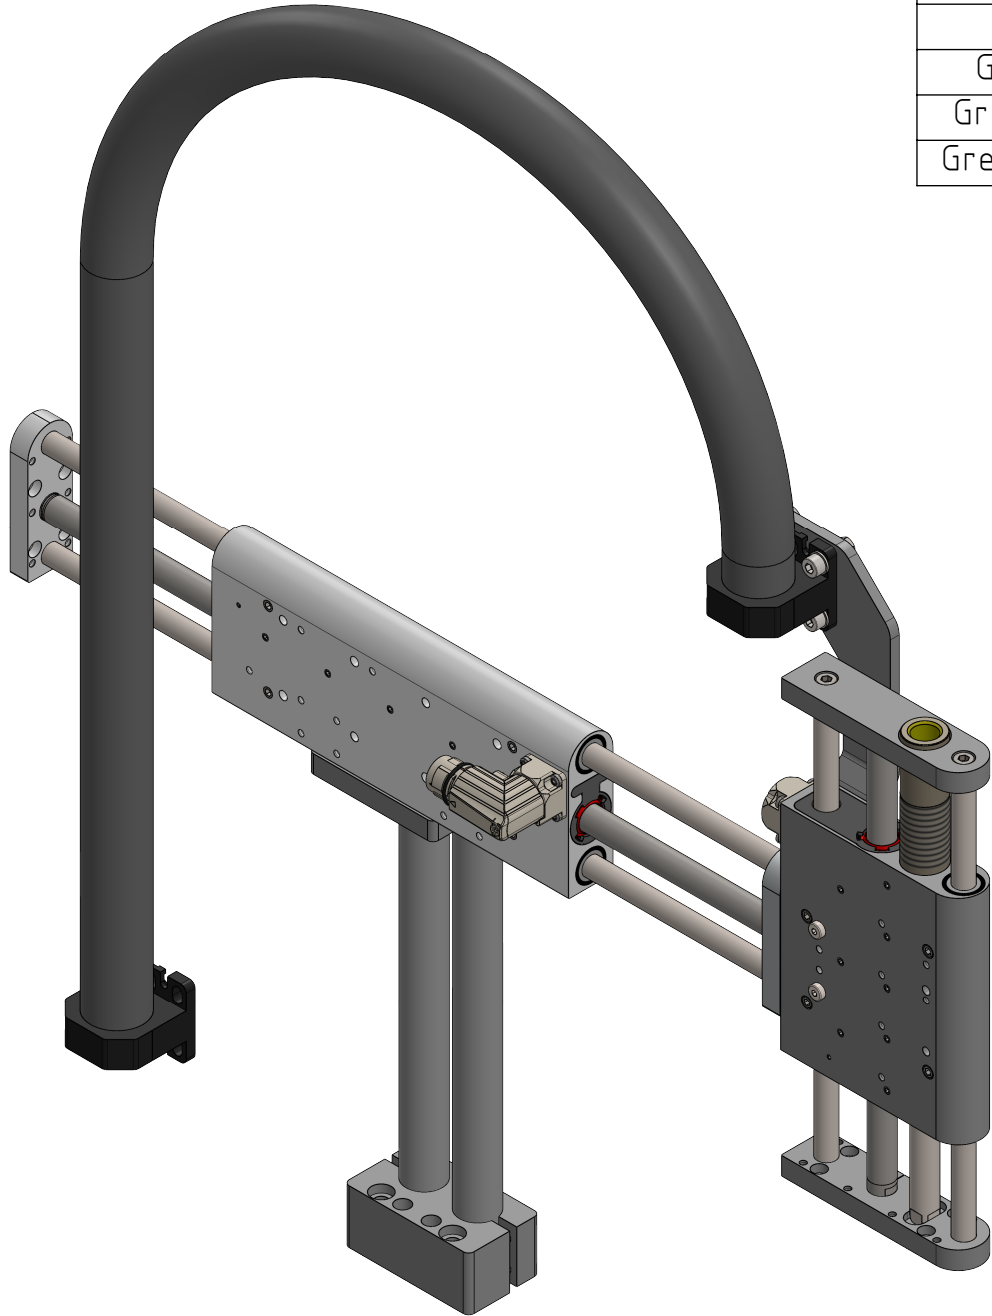





Stage type	PP03_210-23x160H_100-23x80F-MS11_MT01_TC01	
Motor type	Horizontal: 0150-6769 DM01-23x160H-XP-R-210	Vertical: 0150-6024 DM03-23x80F-XP-R-100_CS10_MS11
Stroke	210	100
Max. Force@48VDC [N]	137	73
Max. Force@72VDC [N]	137	73
Position resolution [mm]	0.002	0.002
Repeatability [mm]	±0.05	±0.05
Max. acceleration [m/s2]	< 50	< 50
Max. Velocity@48VDC [m/s]	4.9	4.9
Max. Velocity@72VDC [m/s]	7.3	7.3
Deviation	see datasheet	see datasheet
Moving mass [kg]	0.940	0.730
Module mass [kg]	1.910	1.620
Pillar mass [kg]	1.530	
Cable weight [kg/km]	83.0	
Cable tube weight [kg/m]	0.084	
Max. payload	see datasheet	
Grease type - Motor	0150-1954 / 0150-1955 LU02	
Grease type - Bearings	0260-0061 SKF LGFP 2	
Grease type - MagSpring	0150-1954 / 0150-1955 LU02	

Accessories		
Stage type	PP03_210-23x160H_100-23x80F-MS11_MT01_TC01	
Motor type	Horizontal: 0150-6769 DM01-23x160H-XP-R-210	Vertical: 0150-6024 DM03-23x80F-XP-R-100_CS10_MS11
Safety	Not available	Not available
Clean room	Available: not chosen	Not available
External sensor	Not available	Not available
Cover	Not available	Not available
Cable guide	Chosen: 0150-6704 PP03_TC01	
Pillar system	Chosen: 0150-6829 PP03_MT01	
Force sensor	Available: not chosen	Available: not chosen
Fan Kit	Not available	Not available

A	Document created	27.08.2025	JB	FH
Rev.	Change	Date	Author	Appr.

General tolerance DIN ISO 2768 - mK	Created by J.-E. Beekhuis	Status 27.08.2025/jb	Material	
LinMot® NTI AG LinMot & MagSpring Bodenaeckerstrasse 2 CH-8957 Spreitenbach	0380-0086_PP03_210-23x160H_100-23x80F-MS11_MT01_TC01		☐ Safety Rel.	Weight (g)
	Title, additional title PP03_210-23x160H_ 100-23x80F-MS11_MT01_TC01		☐ UL-Rel.	
	Pick&Place / DM01-23 & DM03-23 Art.No.: 0300-0017		Document type Assembly drawing	
Template type: SW2020 Version: V1-1 SW_A3_hori_Sheet_format_V1-1			Drawing number / Index 0380-0086A	
Scale 1:3				Sheet 2 / 3
				A3

TC01: 1m cable tube
45mm minimum bending radius, static

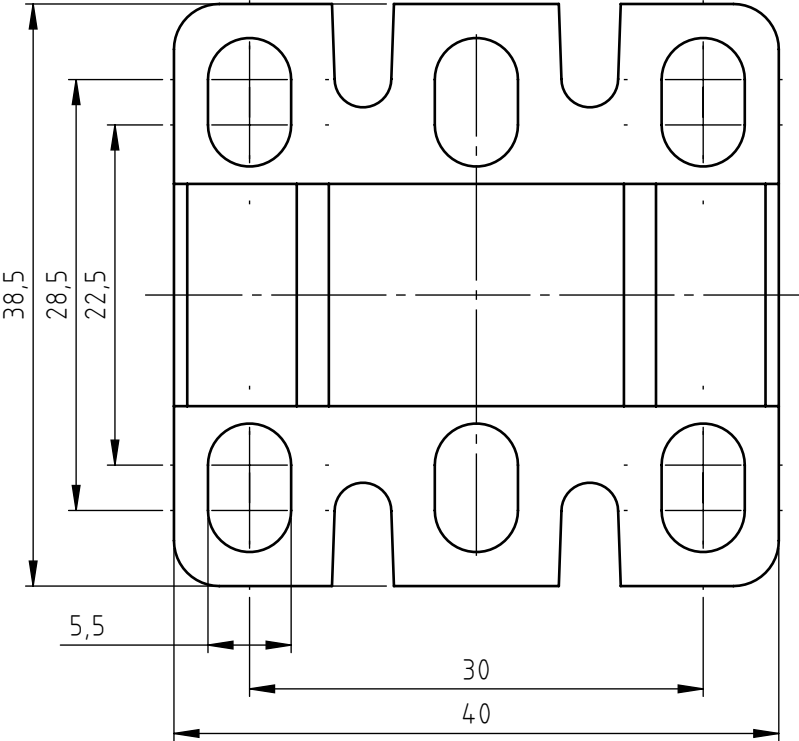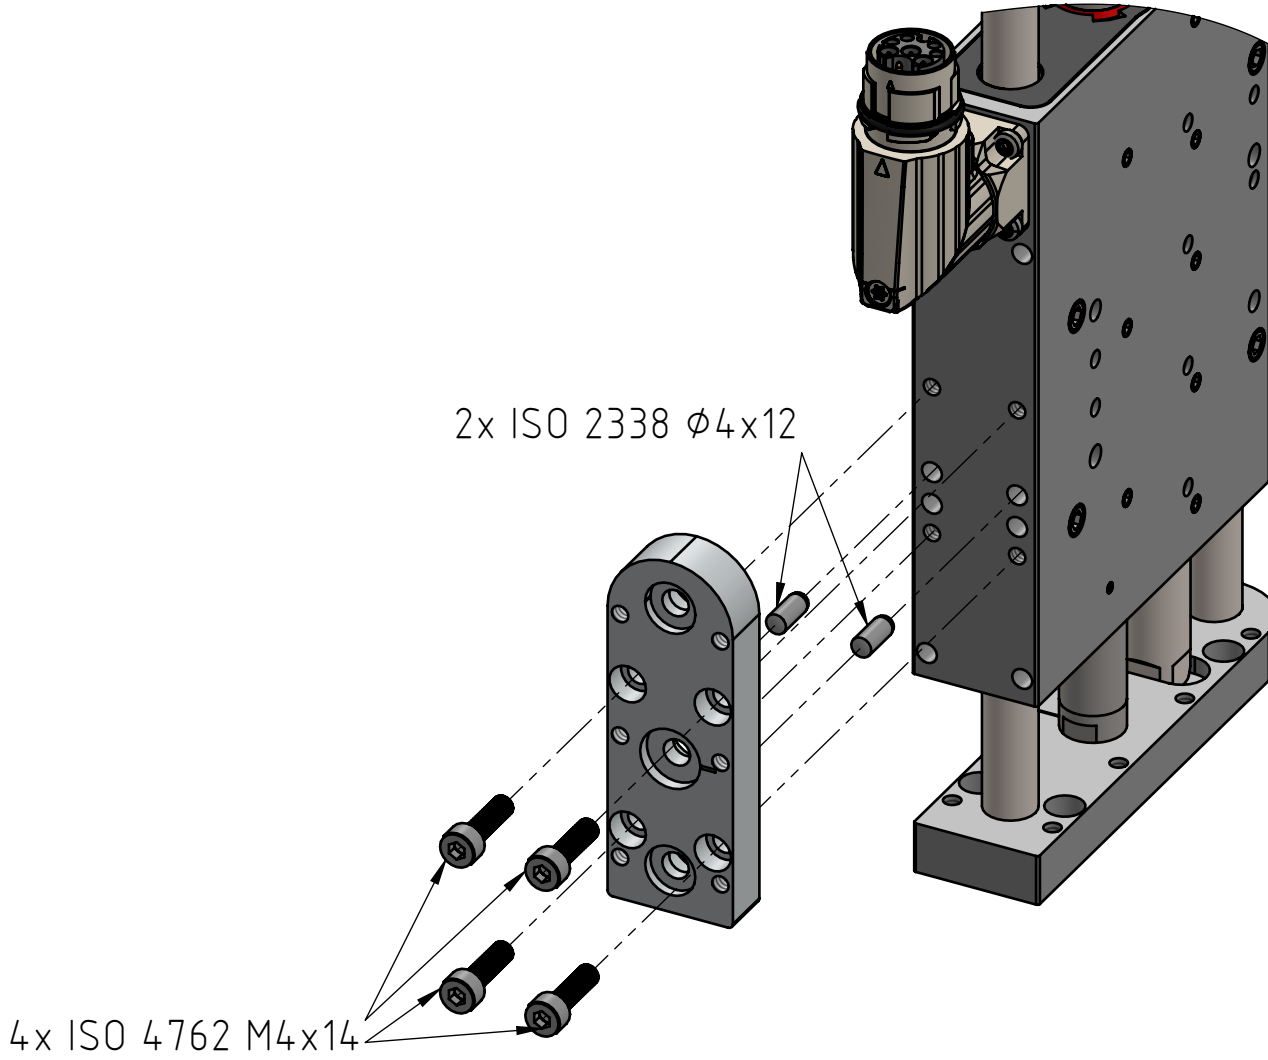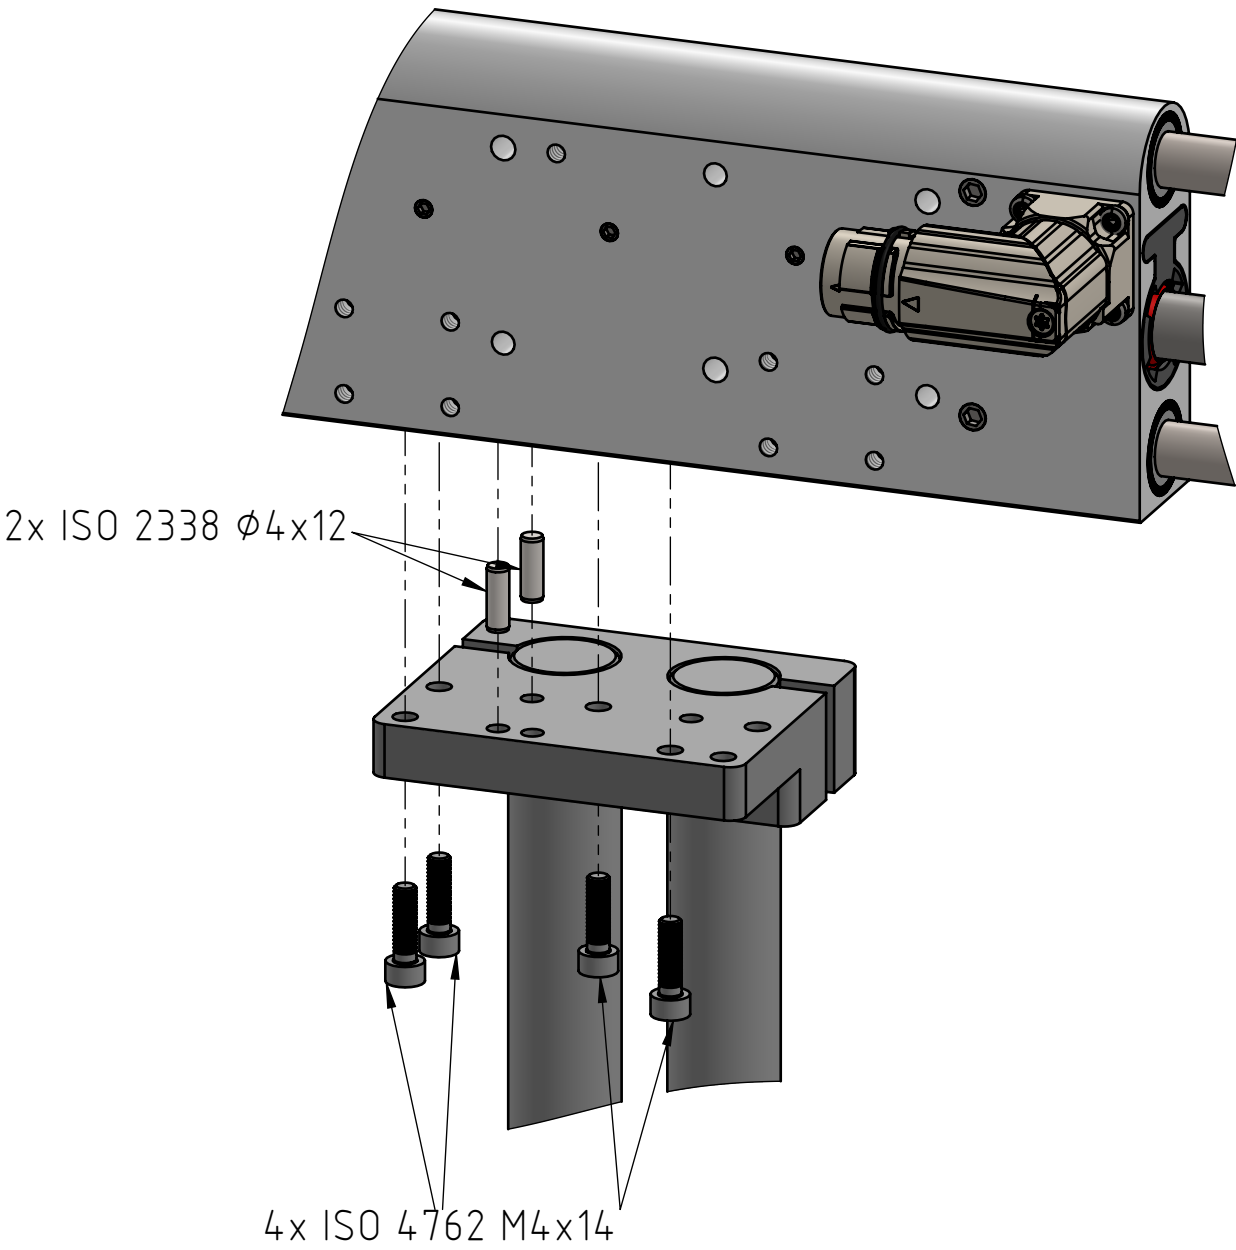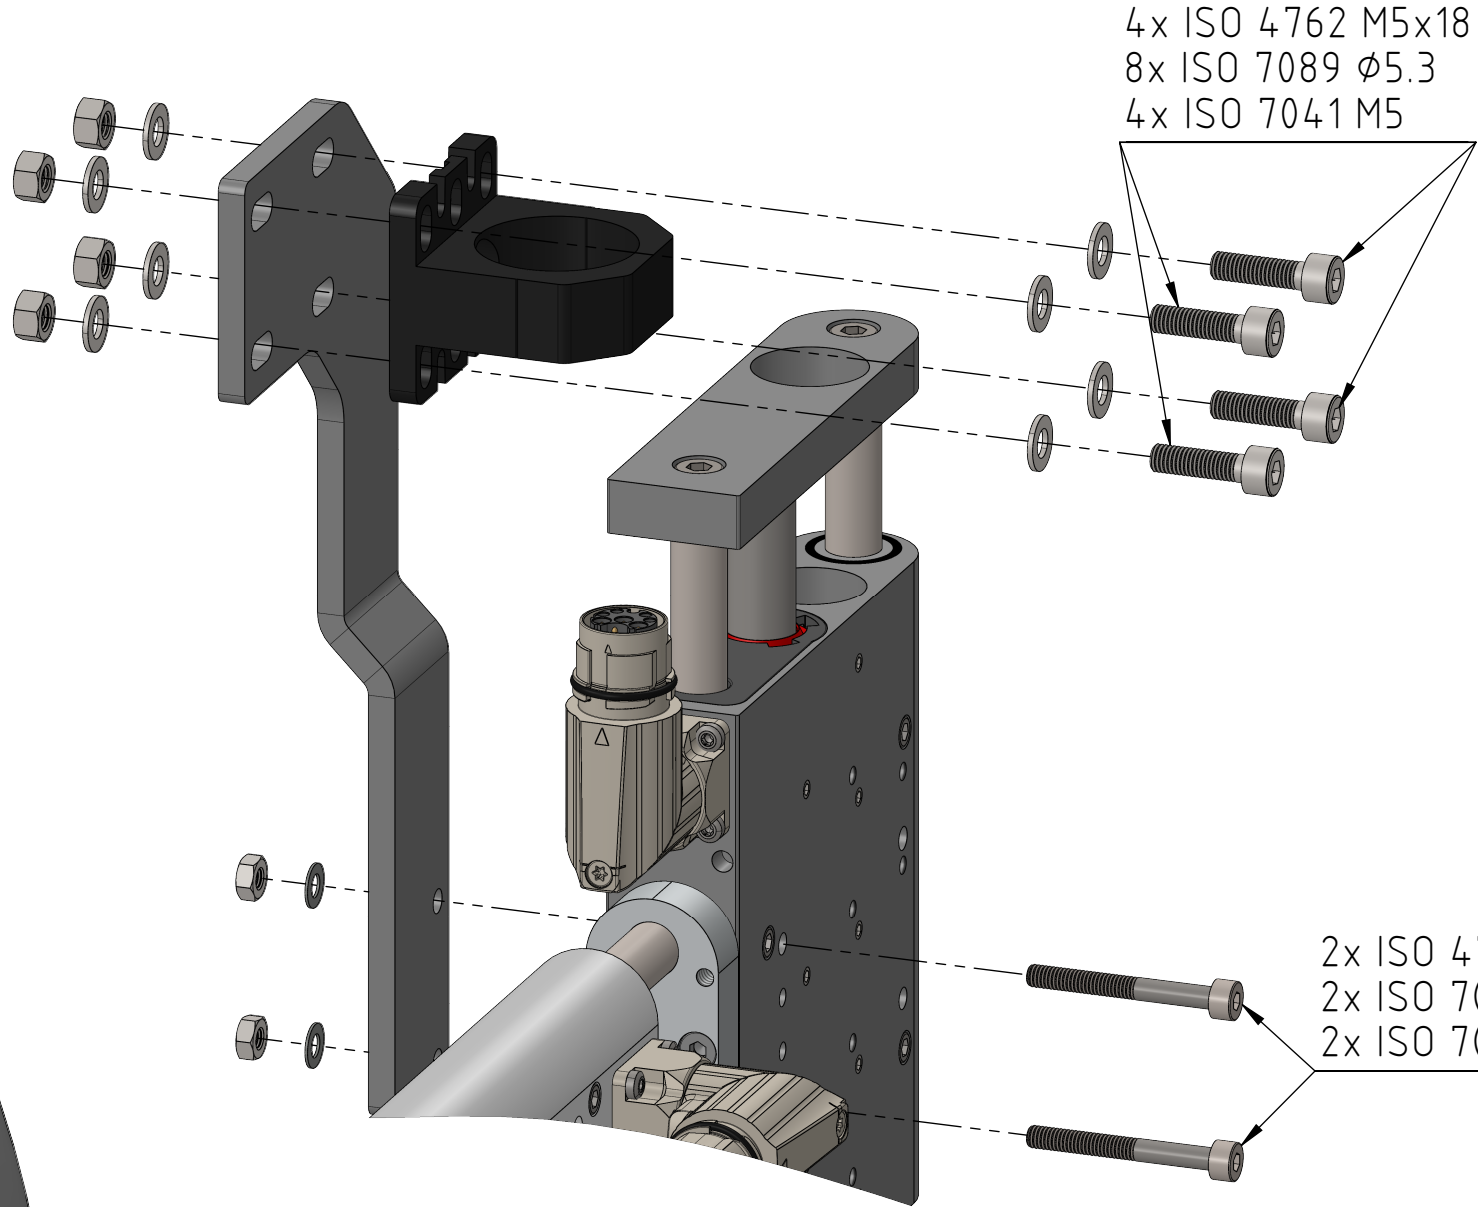

4x ϕ 5.5
elongated holes

Rev.	Change	Status	27.08.2025/jb	Date	Author	Appr.
A	Document created			27.08.2025	JB	FH

General tolerance DIN ISO 2768 - mK	Created by J.-E. Beekhuis	Status 27.08.2025/jb	Material
LinMot®	File name 0380-0086_PP03_210-23x160H_100-23x80F-MS11_MT01_TC01	Title, additional title PP03_210-23x160H_ 100-23x80F-MS11_MT01_TC01	☐ Safety Rel. Weight (g) ☐ UL-Rel.
NTI AG LinMot & MagSpring Bodenaeckerstrasse 2 CH-8957 Spreitenbach	Template type: SW2020 Version: V1-1 SW_A2_hori_Sheet_format_V1-1	Pick&Place / DM01-23 & DM03-23 Art.No.: 0300-0017	Document type Assembly drawing Drawing number / Index 0380-0086A
Scale 3:5			Sheet 3 / 3 A2