
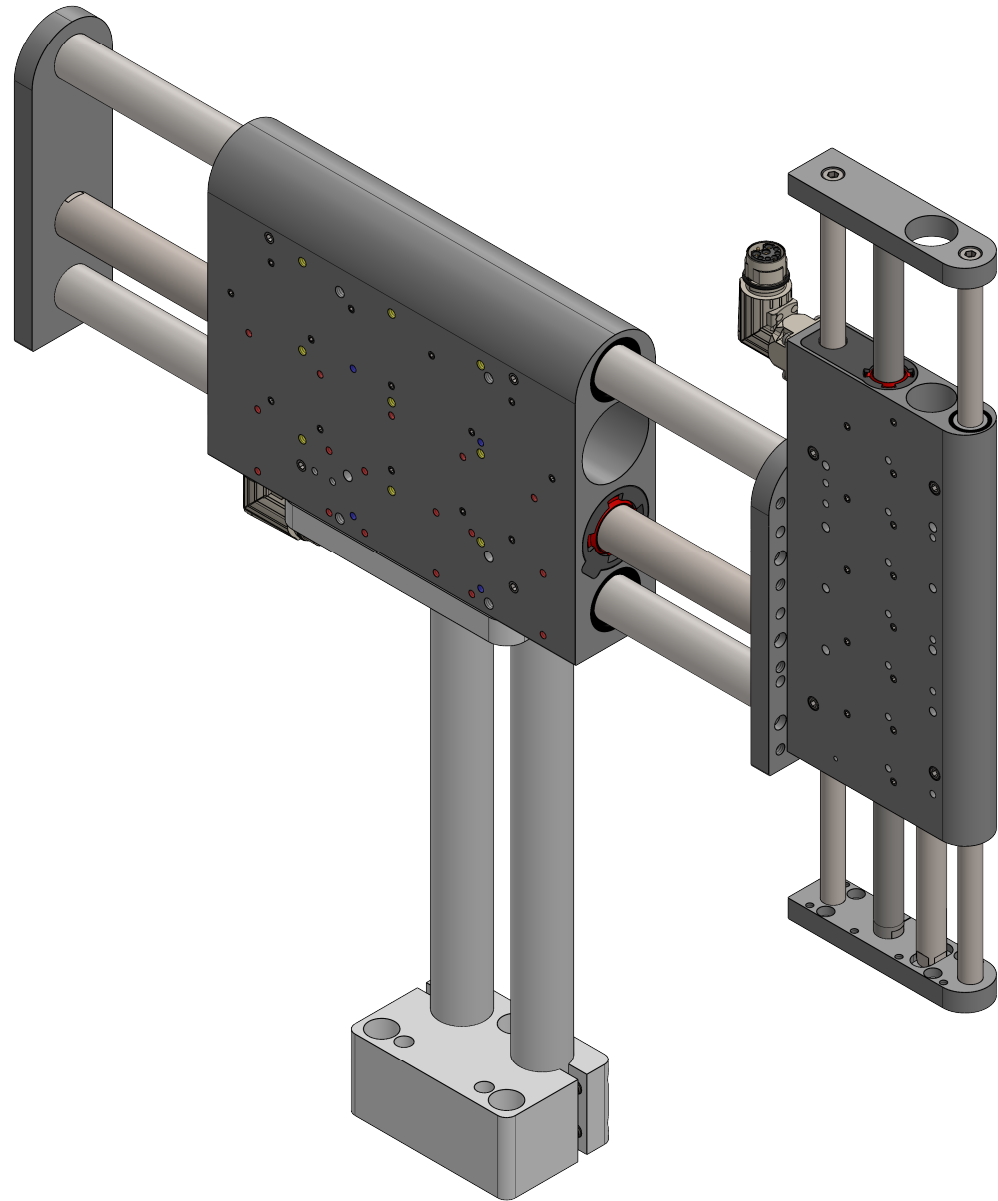
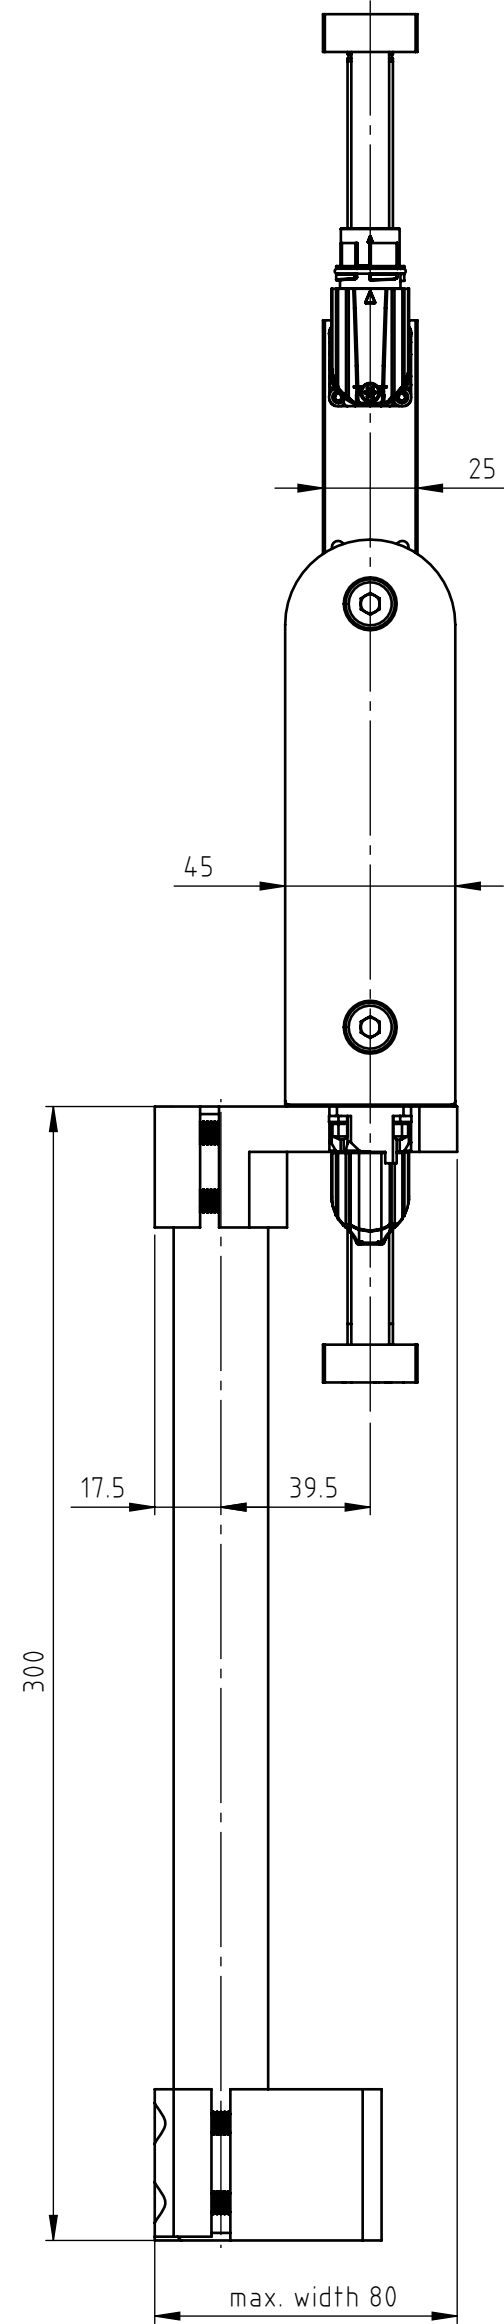



The copyright to this document, which is personally entrusted to the recipient, remains with our company. Without our written permission, the document may not be copied nor reproduced nor communicated or made accessible to third parties without our written permission.

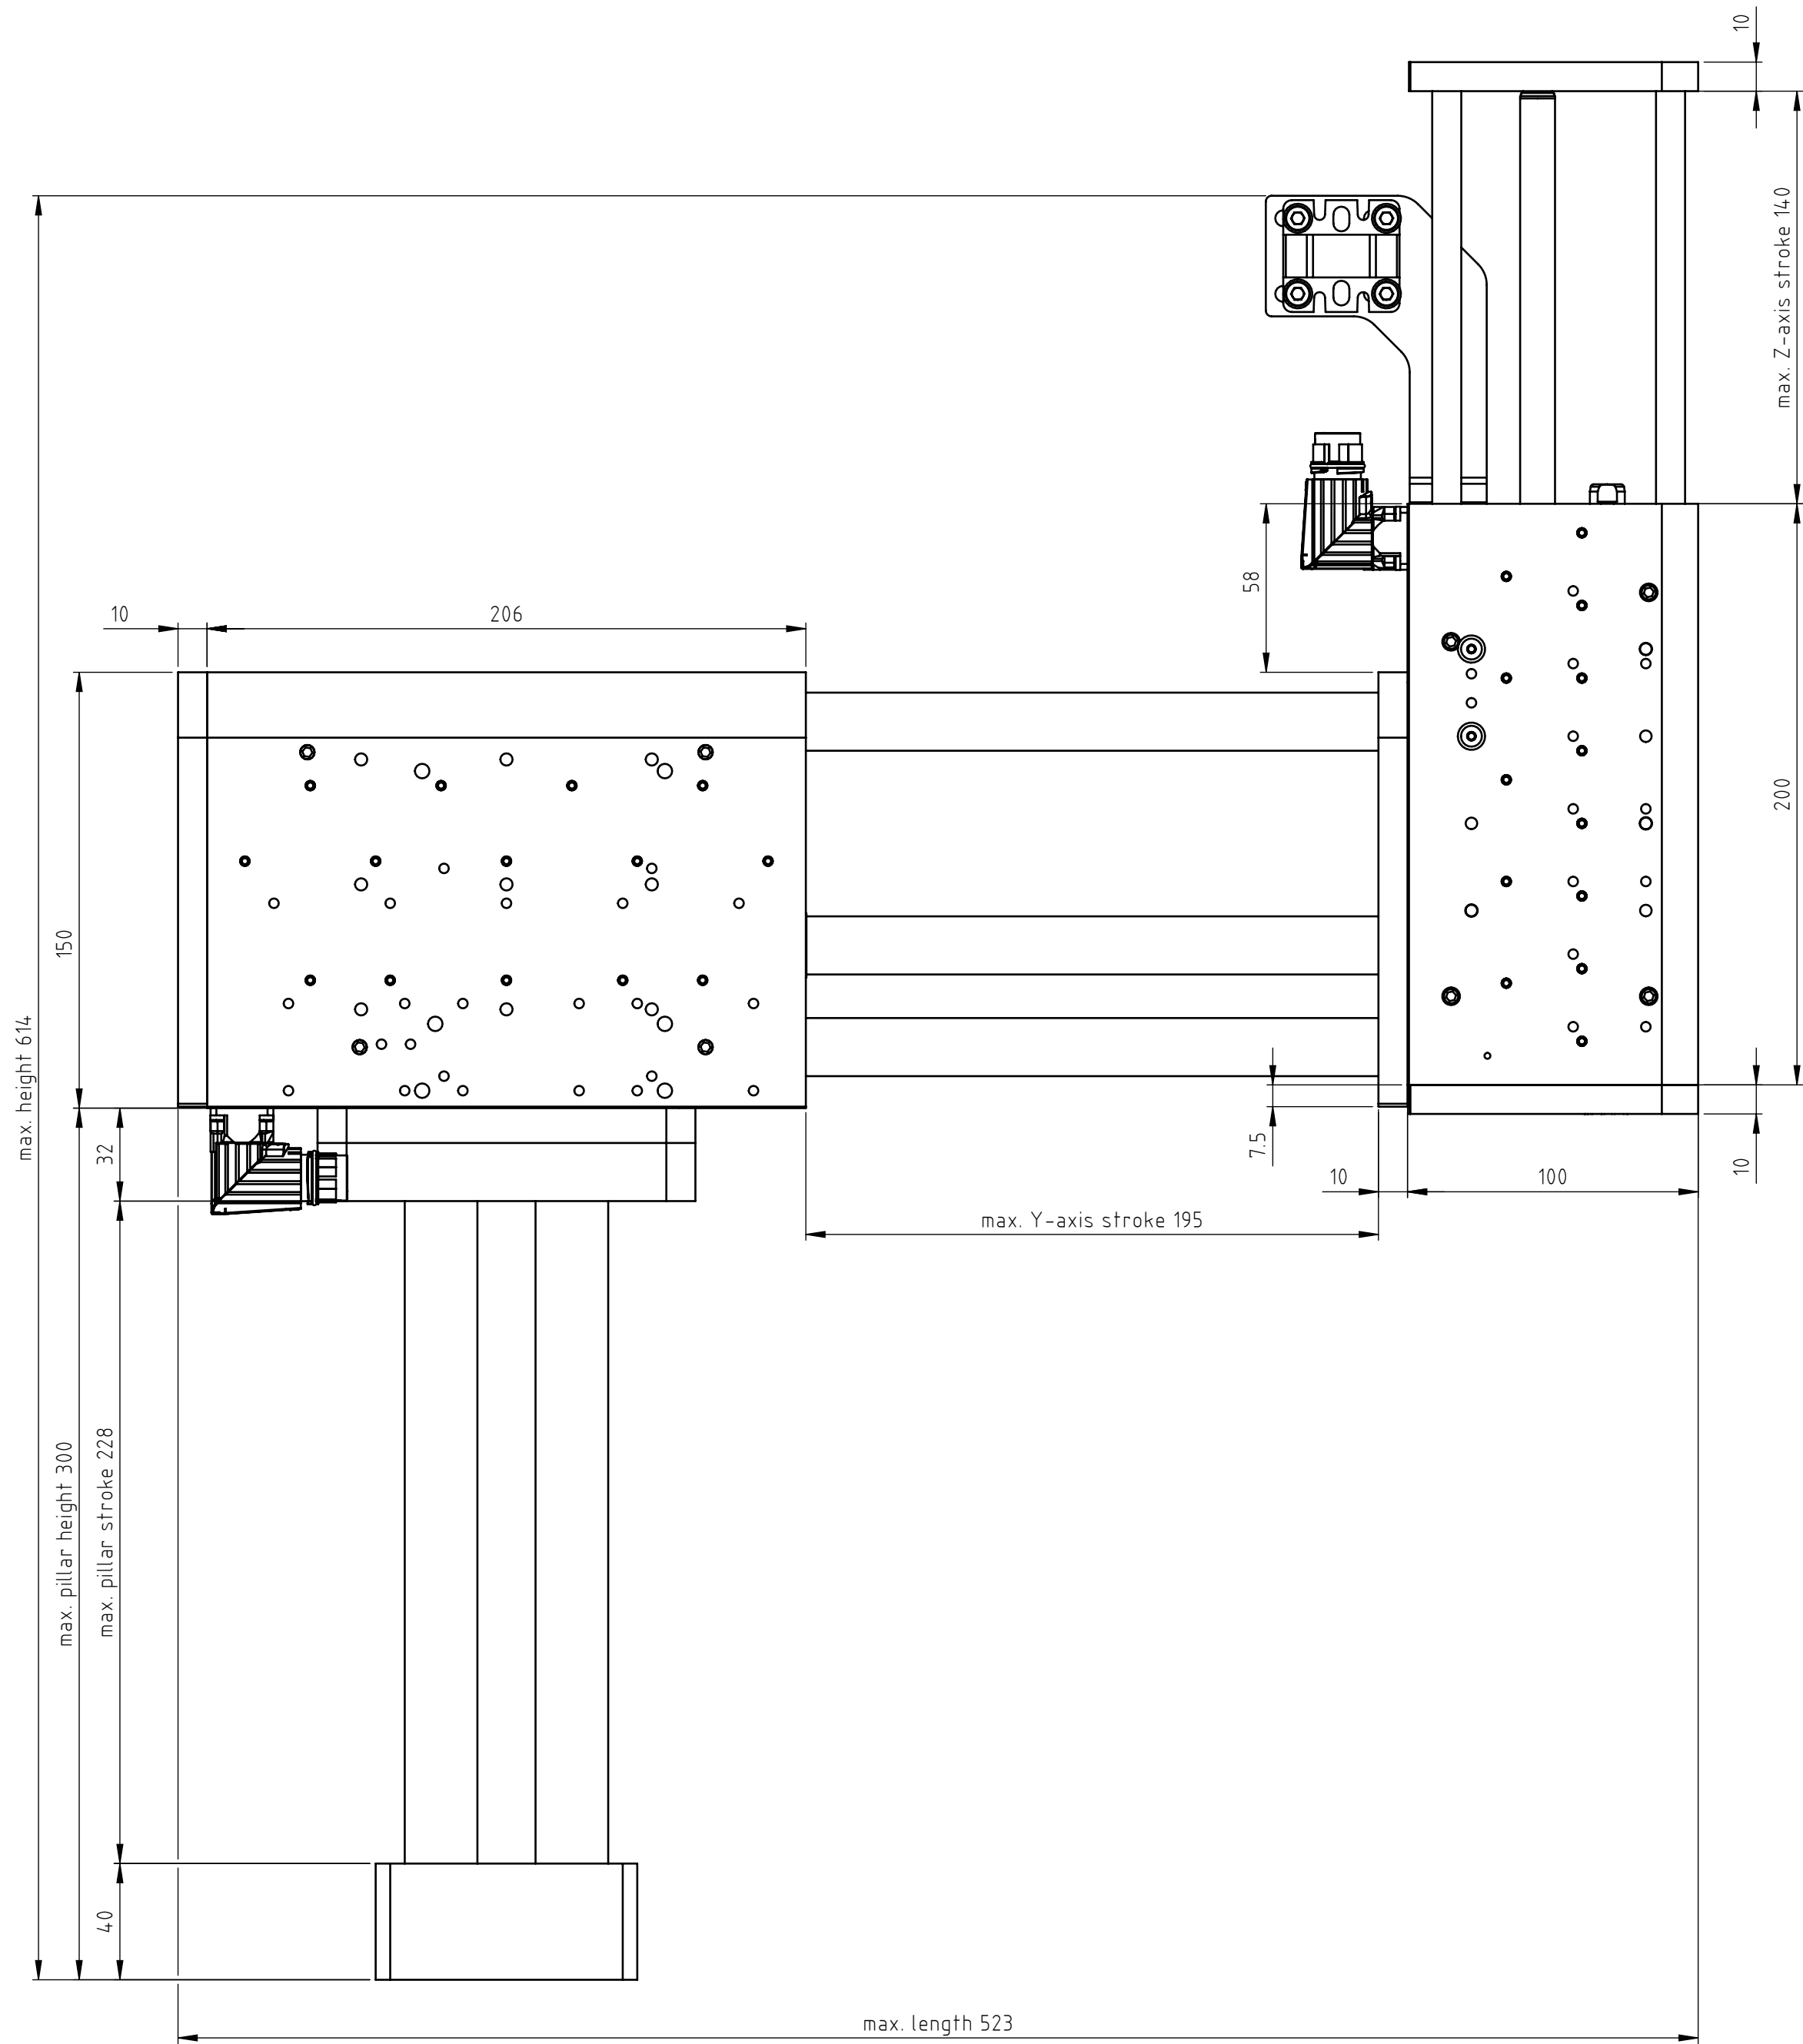

A	Document created	25.09.2025	JB	FH
Rev.	Change	Date	Author	Appr.

General tolerance DIN ISO 2768 – mK	Created by J.–E. Beekhuis	Status 25.09.2025/jb	Material		
LinMot®	File name 0380-0099_PP03_195-37x120F_100-23x80F-MS11_MT02_TC01	☐ Safety Rel. ☐ UL-Rel.		Weight (g)	
	Title, additional title PP03_195-37x120F_ 140-23x160H-MS11_MT02_TC01	Document type Assembly drawing			
	NTI AG LinMot & MagSpring Bodenaeckerstrasse 2 CH-8957 Spreitenbach	Drawing number / Index 0380-0099A			
Template type: SW2020 Version: V1-1 SW_A2_hori_Sheet_format_V1-1	Pick&Place / DM01-37 & DM03-23 Art.No.: 0300-0021	Scale 1:2			Sheet 1 / 3 A2

The copyright to this document, which is personally entrusted to the recipient, remains with our company. Without our written permission, the document may not be copied nor reproduced nor communicated or made accessible to third parties without our written permission.

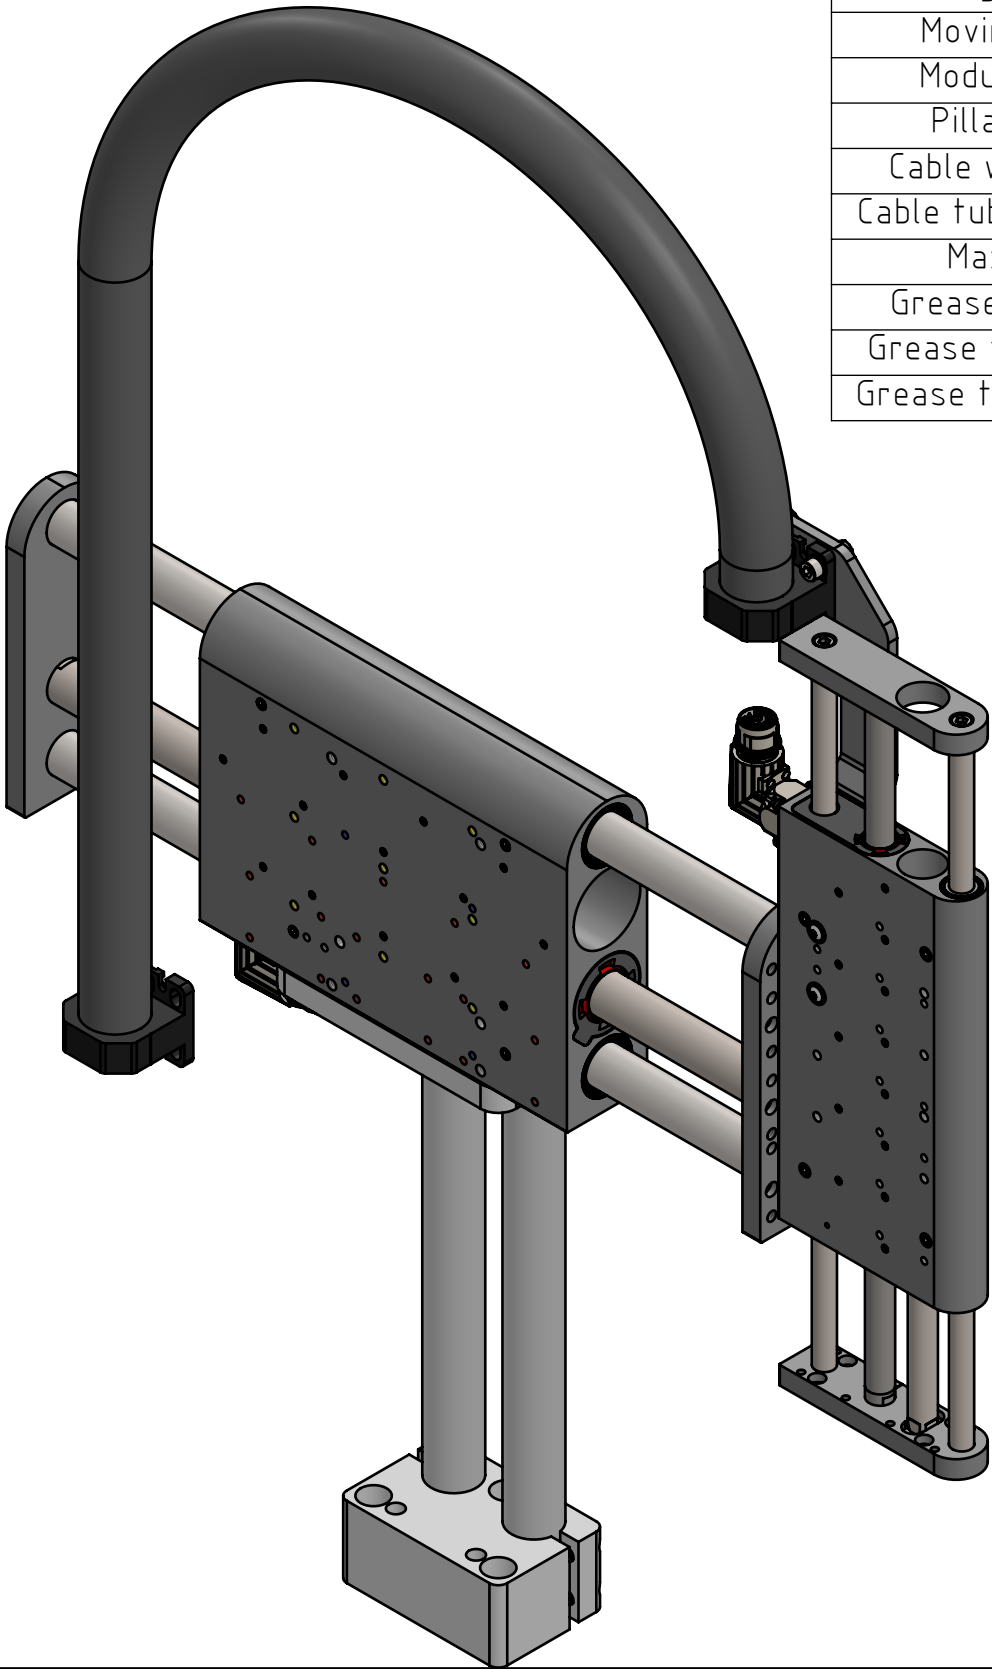


Stage type	PP03_195-37x120F_140-23x160H-MS11_MT02_TC01	
Motor type	Horizontal: 0150-6963 DM03-37x120F-HP-R-195_CS10	Vertical: 0150-6166 DM03-23x160H-XP-R-140_CS10_MS11
Stroke	195	80
Max. Force@48VDC [N]	255	137
Max. Force@72VDC [N]	255	137
Position resolution [mm]	0.005	0.002
Repeatability [mm]	±0.05	±0.05
Max. acceleration [m/s2]	< 50	< 50
Max. Velocity@48VDC [m/s]	2.5	4.9
Max. Velocity@72VDC [m/s]	3.8	7.3
Deviation	see datasheet	see datasheet
Moving mass [kg]	2.340	0.980
Module mass [kg]	5.050	2.350
Pillar mass [kg]	3.200	
Cable weight [kg/km]	83.0	
Cable tube weight [kg/m]	0.084	
Max. payload	see datasheet	see datasheet
Grease type - Motor	0150-1954 / 0150-1955 LU02	
Grease type - Bearings	0260-0061 SKF LGFP 2	
Grease type - MagSpring	0150-1954 / 0150-1955 LU02	

Accessories		
Stage type	PP03_195-37x120F_140-23x160H-MS11_MT02_TC01	
Motor type	Horizontal: 0150-6963 DM03-37x120F-HP-R-195_CS10	Vertical: 0150-6166 DM03-23x160H-XP-R-140_CS10_MS11
Safety	Available: not chosen	Not available
Clean room	Available: not chosen	Not available
External sensor	Available: not chosen	Not available
Cover	Not available	Not available
Cable guide	Chosen: 0150-6704 PP03_TC01	
Pillar system	Chosen: 0150-6831 PP03_MT02	
Force sensor	Available: not chosen	Available: not chosen
Fan Kit	Available: not chosen	Not available





A	Document created	25.09.2025	JB	FH
Rev.	Change	Date	Author	Appr.


General tolerance DIN ISO 2768 - mK	Created by J.-E. Beekhuis	Status 25.09.2025/jb	Material	
LinMot® NTI AG LinMot & MagSpring Bodenaeckerstrasse 2 CH-8957 Spreitenbach	0380-0099_PP03_195-37x120F_100-23x80F-MS11_MT02_TC01		☐ Safety Rel.	Weight (g)
	Title, additional title PP03_195-37x120F_ 140-23x160H-MS11_MT02_TC01		☐ UL-Rel.	
	Pick&Place / DM03-37 & DM03-23 Art.No.: 0300-0021		Document type Assembly drawing	
Template type: SW2020 Version: V1-1 SW_A3_hori_Sheet_format_V1-1			Drawing number / Index 0380-0099A	
Scale 1:3				Sheet 2 / 3
			A3	

TC01: 1m cable tube
45mm minimum bending radius, static

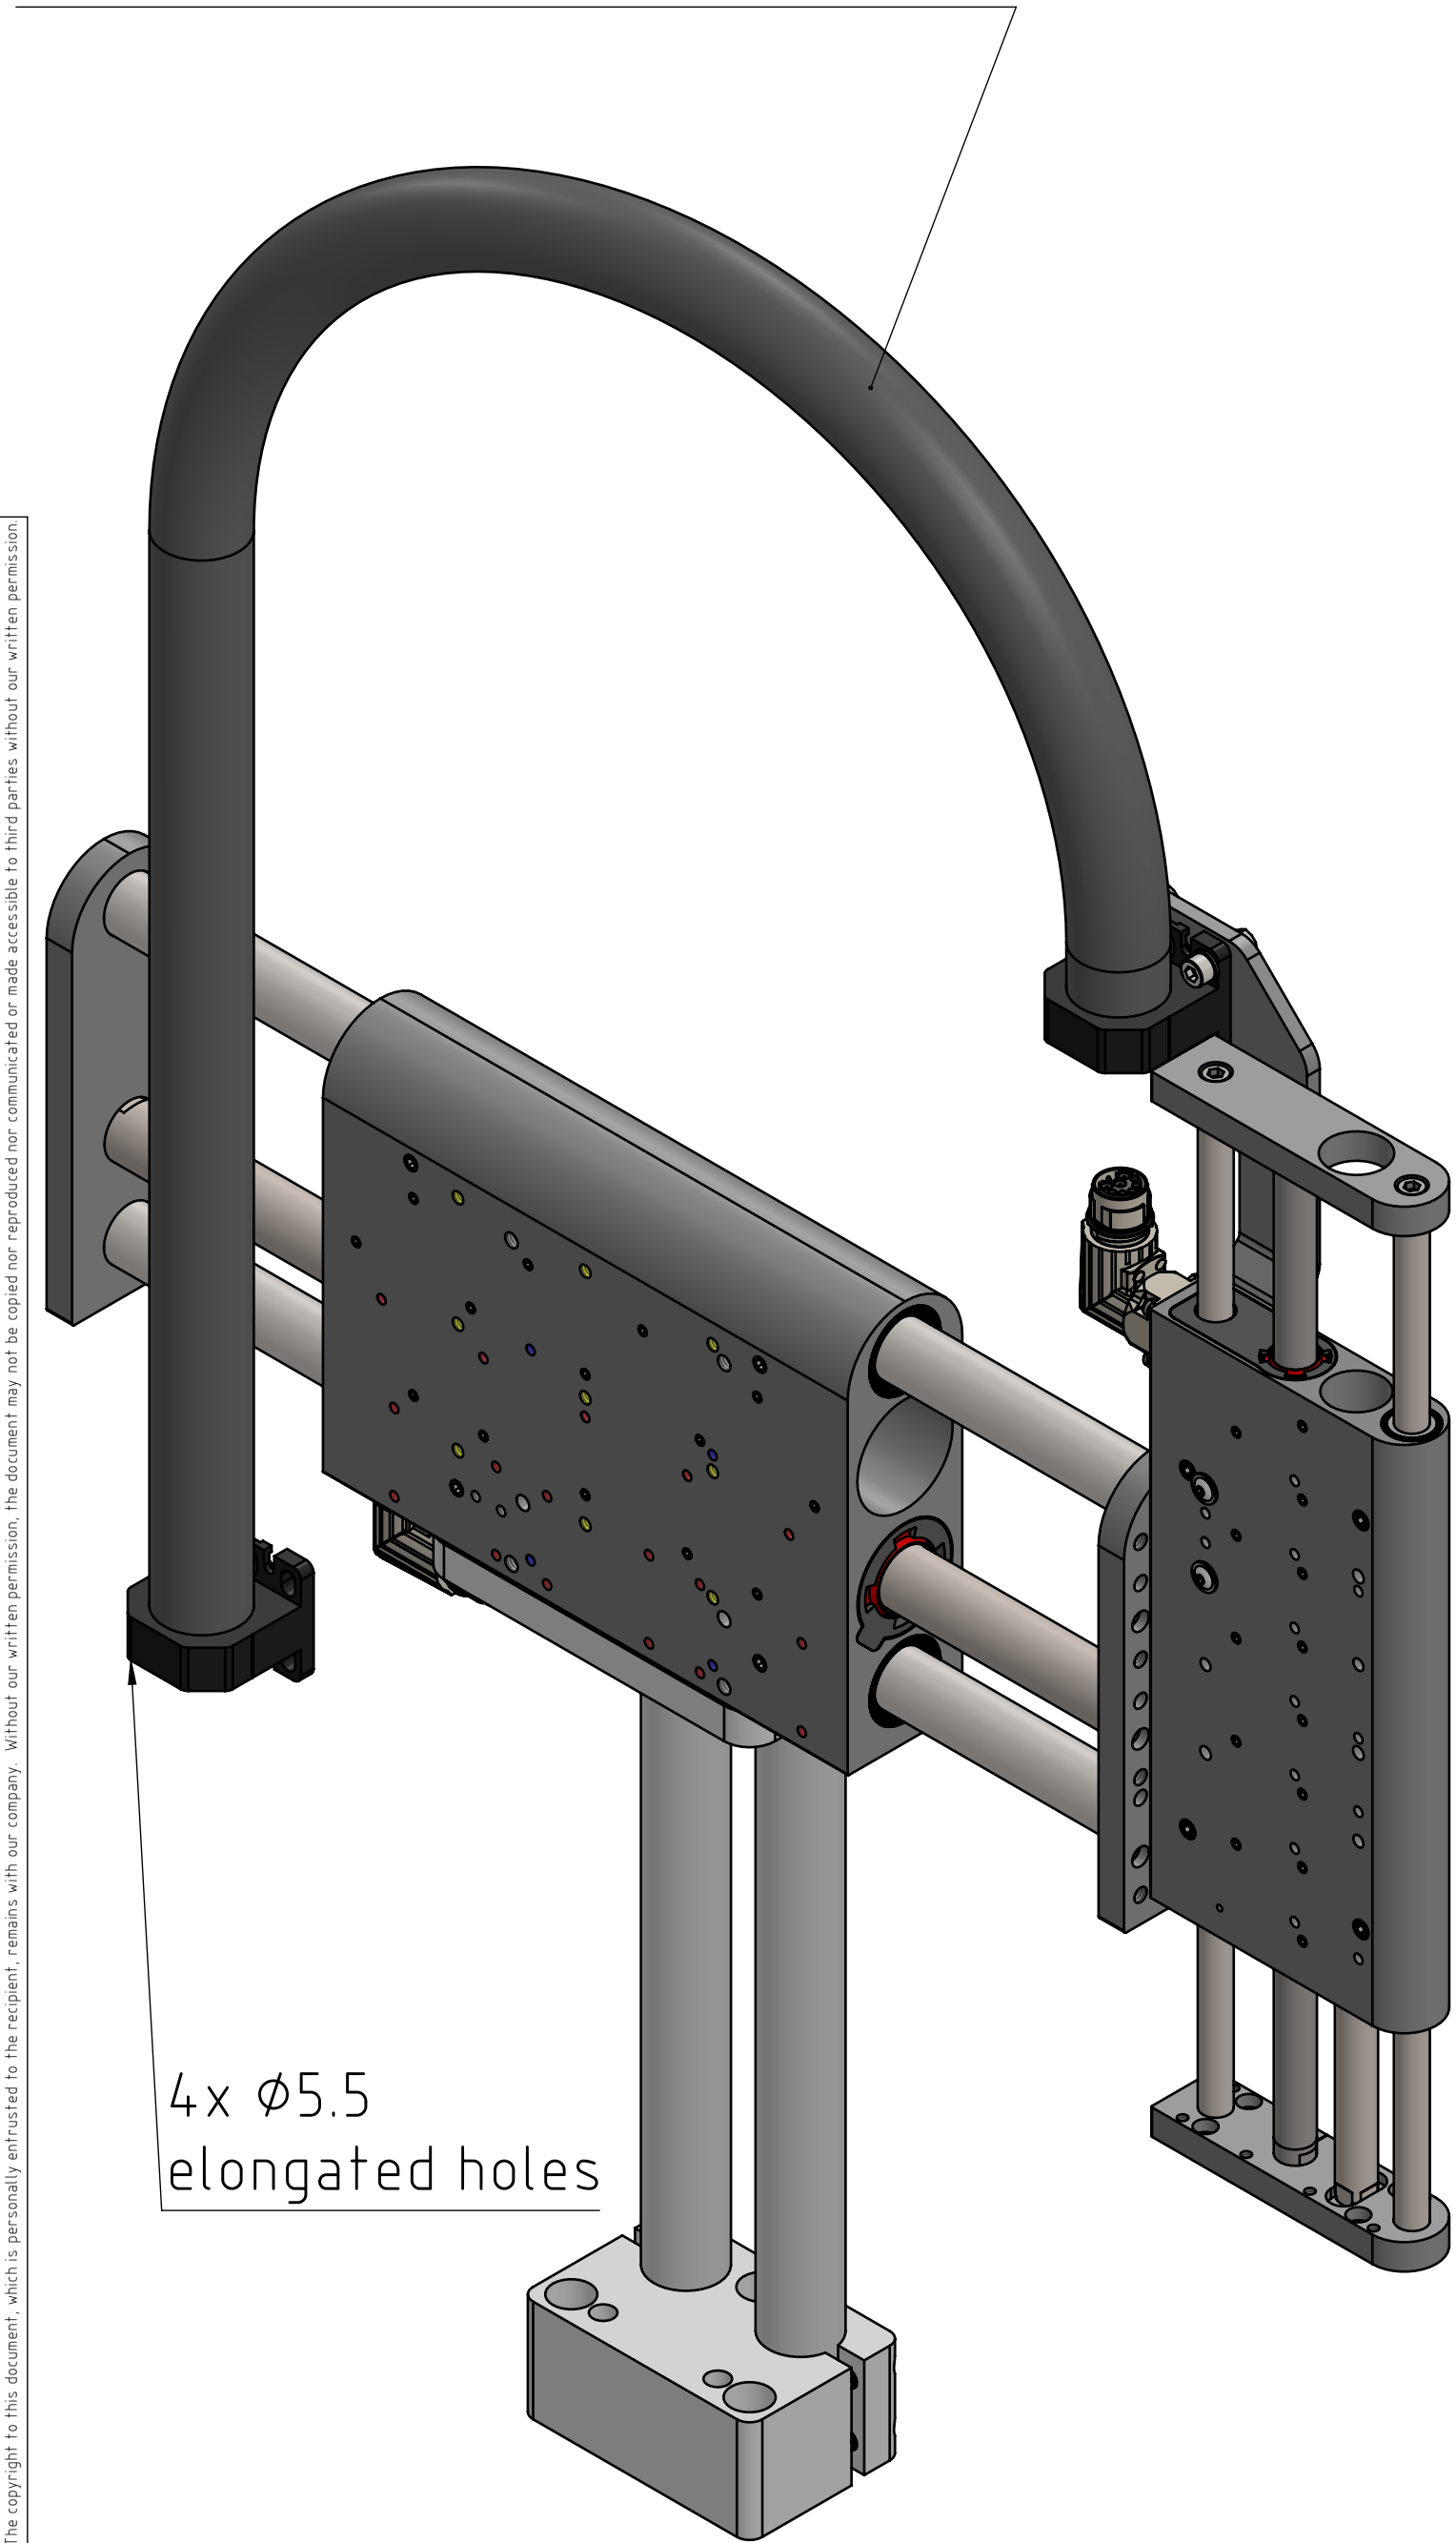

4x Ø5.5
elongated holes

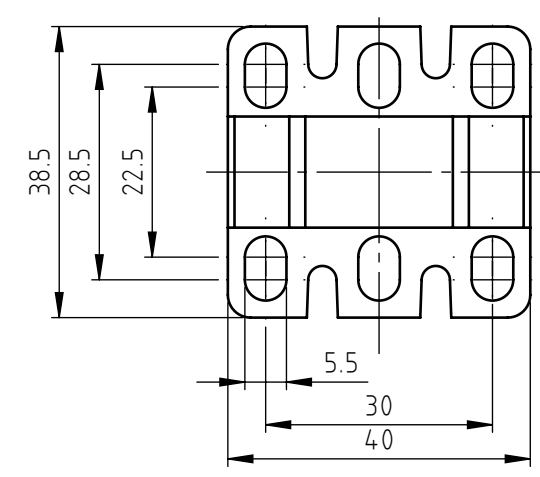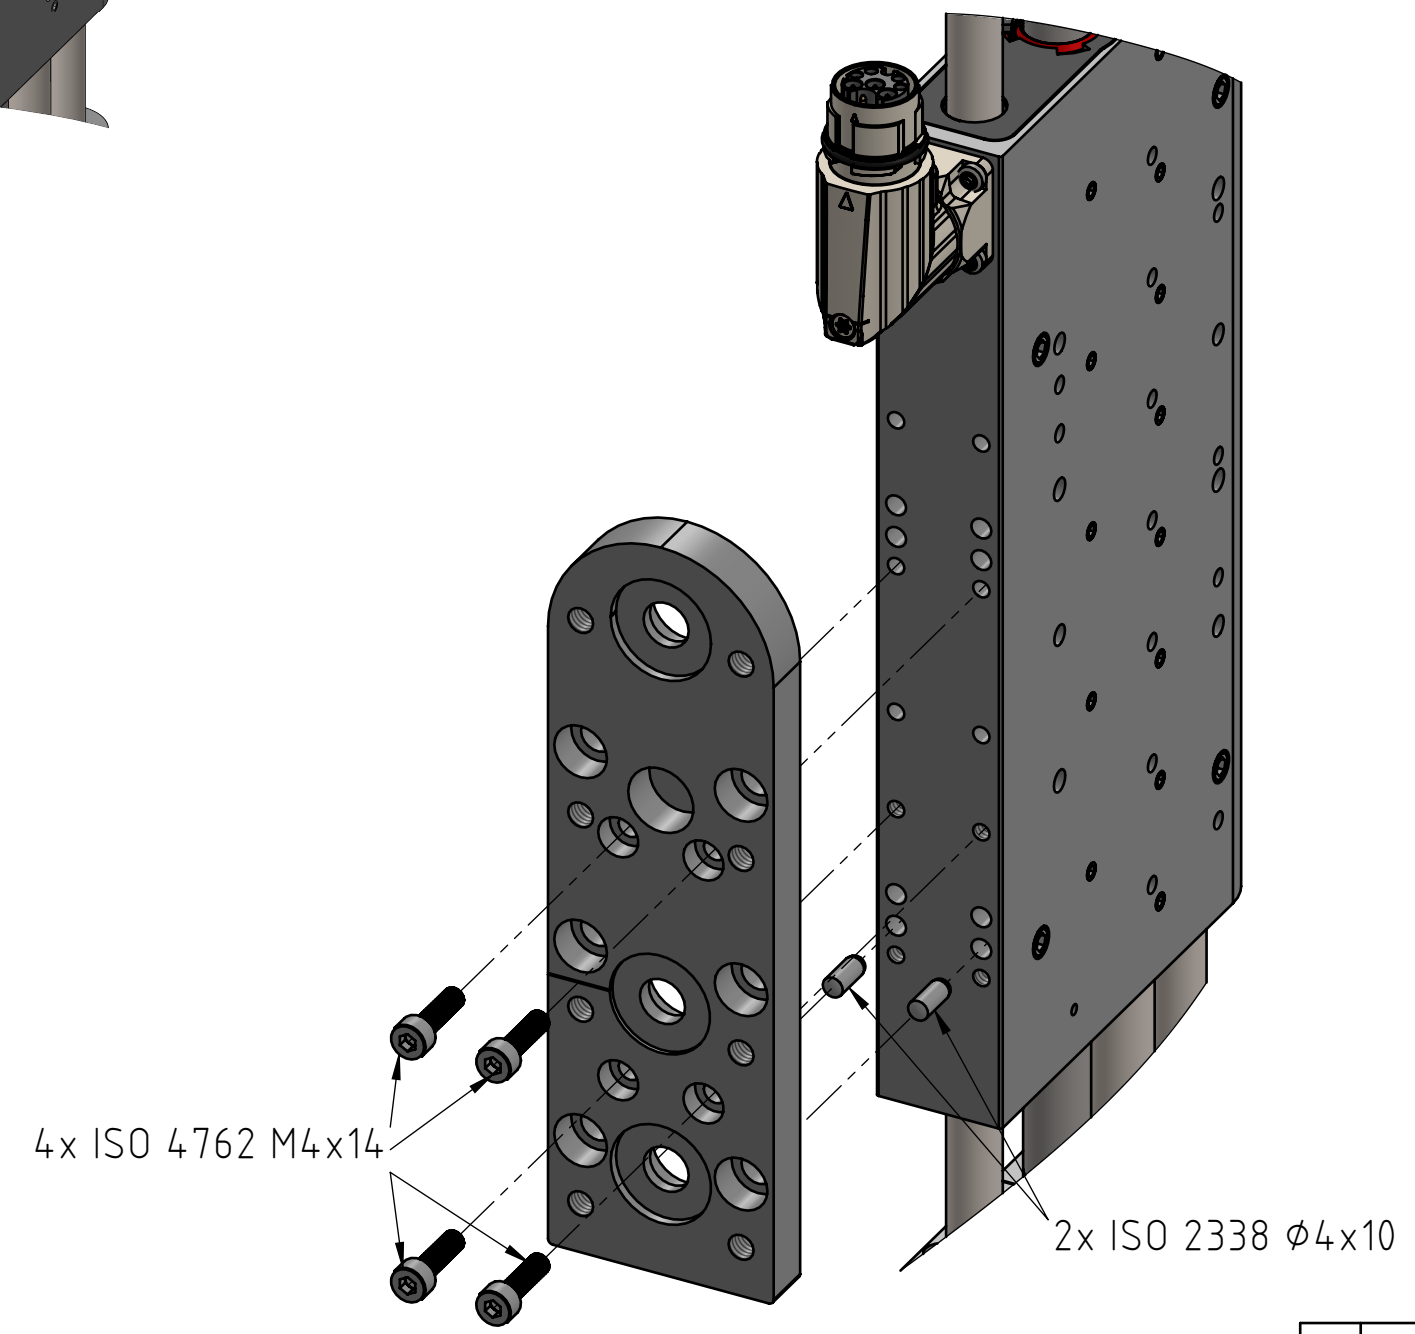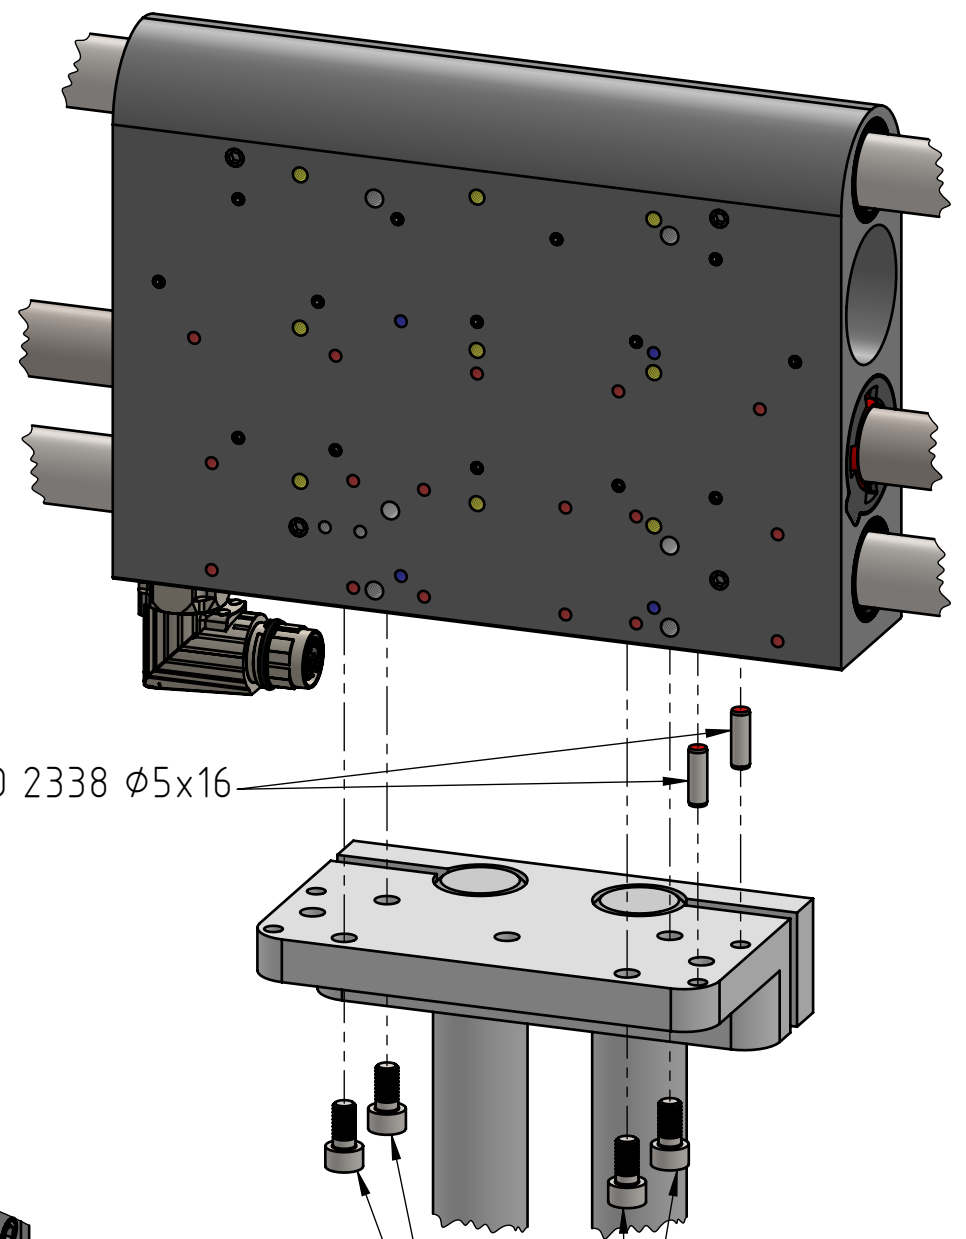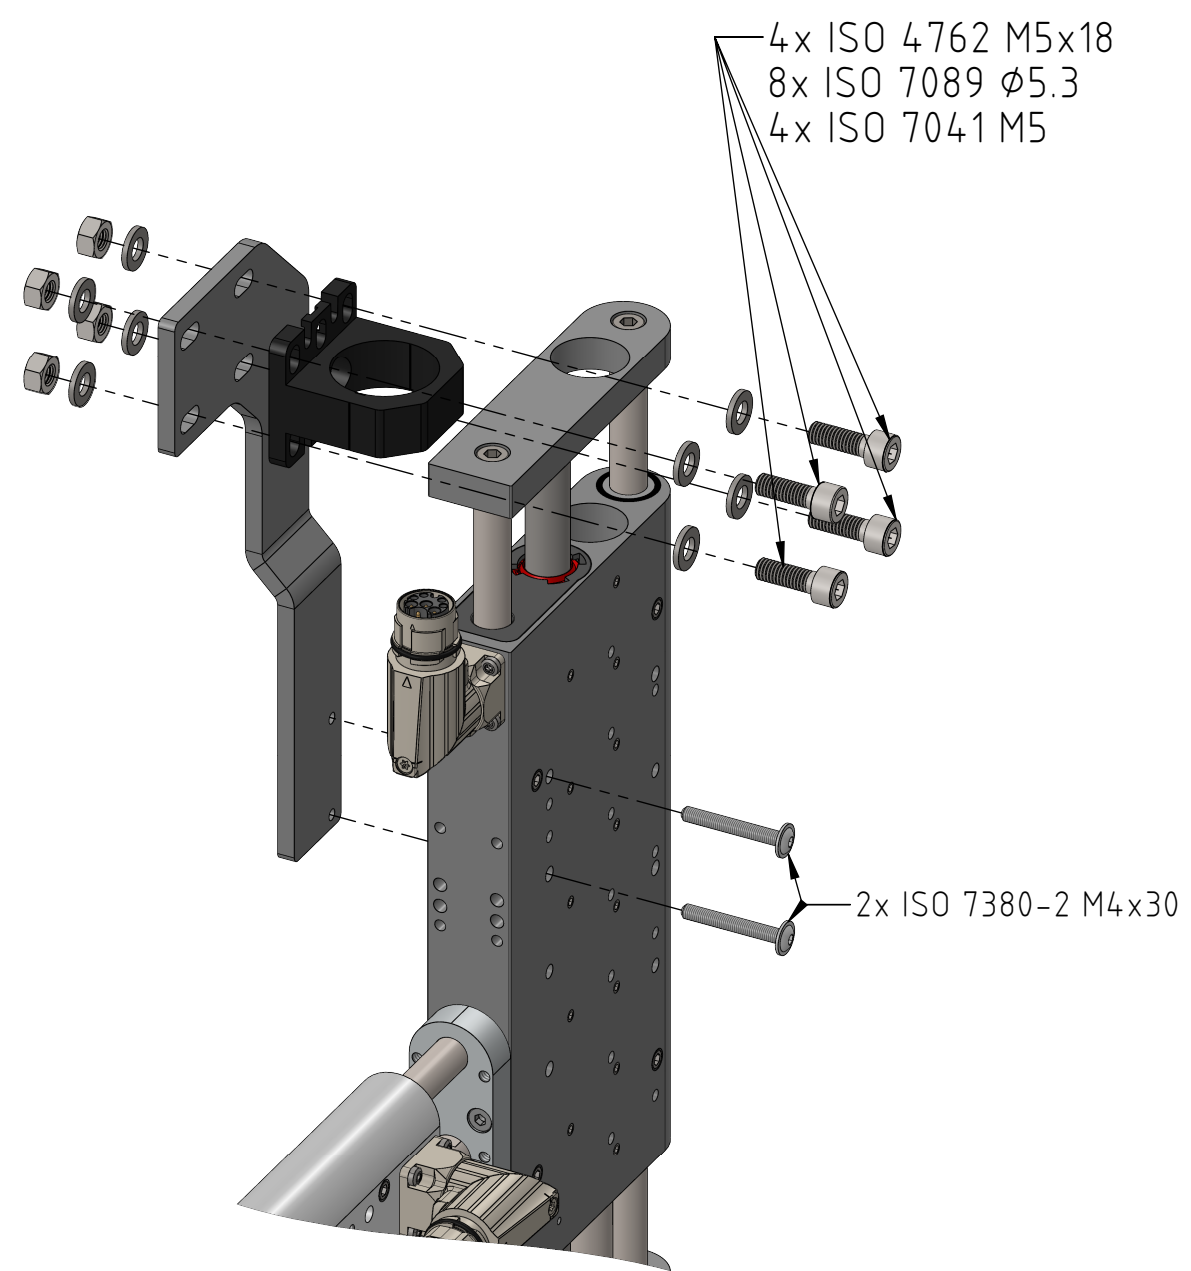

A	Document created		25.09.2025	JB	FH
Rev.	Change		Date	Author	Appr.
Created by E. Beekhuis		Status 25.09.2025/jb	Material		
File name 0380-0099_PP03_195-37x120F_100-23x80F-MS11_MT02_TC01		☐ Safety Rel. Weight (g) ☐ UL-Rel.			
Title, additional title P03_195-37x120F_100-23x160H-MS11_MT02_TC01		Document type Assembly drawing			
Pick&Place / DM03-37 & DM03-23		Drawing number / Index 0380-0099A			
Art.No: 0300-0021		Scale 1:2		Sheet 3 / 3	A2