

# LINEAR MOTORS P10-54X240U

4



- ✓ 230VAC and 3 x 400VAC technology
- ✓ Peak forces up to 669 N
- ✓ LinMot encoder or 3rd party drive encoder  
SinCos, A/B incremental, BiSS / PT1000, PTC
- ✓ Extremely high dynamic
- ✓ Rotating push-pull TWIN connector for power and encoder cables
- ✓ Can also be controlled by standard third-party servo drives

## **LINEAR MOTORS P10-54X240U**

<b>/ TECHNICAL DATA /</b> .....	<b>454</b>
<b>/ MOTOR SPECIFICATIONS /</b> .....	<b>468</b>
P10-54x240U/10-BL-TU.....	468
P10-54x240U/100-BL-TU .....	469
P10-54x240U/220-BL-TU .....	470
P10-54x240U/310-BL-TU .....	471
P10-54x240U/400-BL-TU .....	472
P10-54x240U/520-BL-TU .....	473
P10-54x240U/610-BL-TU .....	474
P10-54x240U/820-BL-TU .....	475
P10-54x240U/1000-BL-TU .....	476
P10-54x240U/1210-BL-TU .....	477
P10-54x240U/1420-BL-TU .....	478
P10-54x240U/1600-BL-TU .....	479
<b>/ ACCESSORIES /</b> .....	<b>480</b>



## MOTOR FAMILY P10-54x240U


### Technical Data

Technical Data			
<b>Stroke</b>			
Max. Stroke (ES)	mm (in)		10 - 1600 (0.39 - 63)
<b>Force</b>			
Max. Force <sup>1</sup> @ 1x230VAC	N (lbf)		669 (150)
Max. Force <sup>1</sup> @ 3x400VAC	N (lbf)		669 (150)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N (lbf)		110 / 150 / 210 (25 / 34 / 48)
Max. Border Force relative	%		100
Force Constant 1	N/A <sub>pk</sub> (lbf/A <sub>pk</sub> )		44 (9.89)
Force Constant 2	N/A <sub>rms</sub> (lbf/A <sub>rms</sub> )		62.2 (14)
<b>Velocity</b>			
Max. Velocity @ 1x230VAC	m/s (in/s)		4.1 (159.9)
Max. Velocity @ 3x400VAC	m/s (in/s)		7.1 (279.9)
<b>Position Detection</b>			
Position Resolution	mm (in)		0.007 (0.0003)
Repeatability	mm (in)		±0.05 (±0.002)
Position Resolution with ES	mm (in)		0.001 (0.00004)
Repeatability with ES	mm (in)		±0.01 (±0.0004)
Linearity with ES	mm (in)		±0.01 (±0.0004)
<b>Electrical Data</b>			
Max. Current <sup>2</sup> @ 1x230VAC	A <sub>pk</sub> / A <sub>rms</sub>		15.1 / 10.6
Max. Current <sup>2</sup> @ 3x400VAC	A <sub>pk</sub> / A <sub>rms</sub>		15.1 / 10.6
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A <sub>pk</sub>		2.5 / 3.5 / 4.9
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A <sub>rms</sub>		1.8 / 2.4 / 3.4
Back EMF Constant	V <sub>pk</sub> / (m/s) (V <sub>pk</sub> / (in/s))		50.8 (1.29)
Terminal Resistance 25 °C / 120 °C	Ohm		7.5 / 10
Terminal Inductivity	mH		6
Magnetic Period	mm (in)		60 (2.35)
<b>Thermal Data</b>			
Max. Winding Temperature (Sensor)	°C		90
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W		1.3 / 0.65 / 0.33
Thermal Time Constant [Passive cooling / Fan / Fluid]	s		1300 / 650 / 330
<b>Mechanical Data</b>			
Stator Diameter	mm (in)		54 (2.1)
Stator Length	mm (in)		342 (13)
Stator Mass	g (lb)		2710 (5.96)
Slider Diameter	mm (in)		28 (1.1)
Slider Length	mm (in)		410 - 2000 (16 - 79)
Slider Mass	g (lb)		1740 - 9140 (3.83 - 20.11)
IP Code			IP 65
<b>Certification</b>			
UL	File-No.		E354430

1) Real time calculation of motor winding temperature is required (including monitoring).

If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 70 % of the peak value has to be taken instead.

**STATOR**

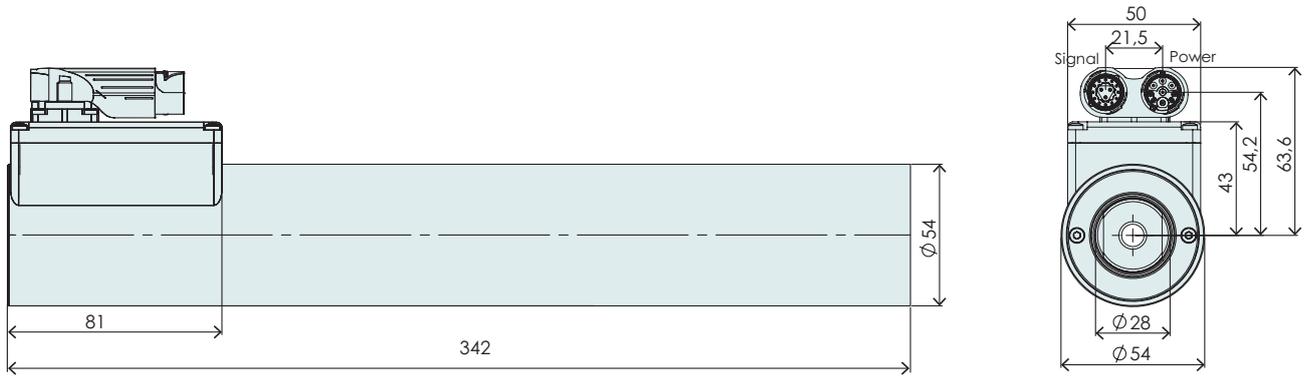

Item	Description	Item-No.	Comment
<b>PS10-54x240U-BL-TU</b>	Stator 3x400VAC, LinMot Encoder	<a href="#">0150-2724</a>	For use with LinMot Drives
<b>PS10-54x240U-BL-TU-D04</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	<a href="#">0150-4410</a>	For use with 3rd Party Drives
<b>PS10-54x240U-BL-TU-D05</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	<a href="#">0150-4593</a>	For use with 3rd Party Drives
<b>PS10-54x240U-BL-TU-D24</b>	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	<a href="#">0150-2750</a>	For use with 3rd Party Drives
<b>PS10-54x240U-BL-TU-D24S</b>	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	<a href="#">0150-4050</a>	For use with 3rd Party Drives
<b>PS10-54x240U-BL-TU-D25</b>	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	<a href="#">0150-2754</a>	For use with 3rd Party Drives
<b>PS10-54x240U-BL-TU-D25S</b>	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	<a href="#">0150-2784</a>	For use with 3rd Party Drives
<b>PS10-54x240U-BL-TU-D26</b>	Stator 3x400VAC, A/B Encoder, PTC single ended	<a href="#">0150-2957</a>	For use with 3rd Party Drives
<b>PS10-54x240U-BL-TU-D34</b>	Stator 3x400VAC, BiSS-C Encoder, Pt1000 dual	<a href="#">0150-5772</a>	For use with 3rd Party Drives

**AVAILABLE INTERFACES FOR 3RD PARTY DRIVES**



TEMPERATURE FEEDBACK		POSITION FEEDBACK			
		SinCos, 1Vpp	A/B 1µm	A/B 5µm	BiSS-C
		D0x	D2x	D2xS	D3x
MotLink C					
Pt1000, dual*	Dx4	<b>D04</b>	<b>D24</b>	<b>D24S</b>	<b>D34</b>
PTC, dual*	Dx5	<b>D05</b>	<b>D25</b>	<b>D25S</b>	
PTC single ended	Dx6		<b>D26</b>		

\* Feedback available on encoder and power connectors.


**CONNECTOR PS10-54x240U-BL-TU (INTERFACE FOR LINMOT DRIVES)**

Motor Connector Wiring	Connector Encoder Uk	Wire Color Motor Cable	
+Vcc	Supply	1	red
GND	Supply	2	black
Sin+	Encoder	3	yellow
Sin-	Encoder	4	orange
Cos+	Encoder	5	green
Cos-	Encoder	6	blue
Mot. Link C+	Communication	7	pink
Mot. Link C-	Communication	8	grey
n. c.	n. c.	9	n. c.
n. c.	n. c.	10	n. c.
n. c.	n. c.	11	n. c.
n. c.	n. c.	12	n. c.
n. c.	n. c.	A	n. c.
n. c.	n. c.	B	n. c.
n. c.	n. c.	C	n. c.

\* The supply voltage Vcc depends on the LinMot Drive type and is within 6...9V.

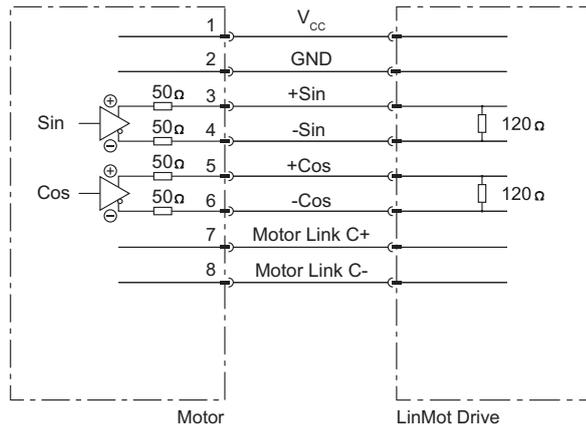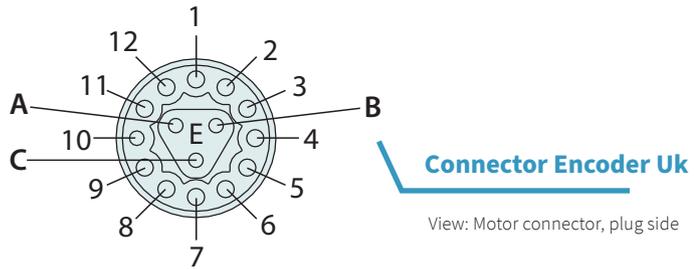

Motor Connector Wiring	Connector Power Tk	Wire Color Motor Cable
Phase U	A	red
PE	PE	yellow-green
Phase V	B	blue
Phase W	C	black (previously: green)
n. c.	1	n. c.
n. c.	2	n. c.
n. c.	3	n. c.
n. c.	4	n. c.
n. c.	5	n. c.

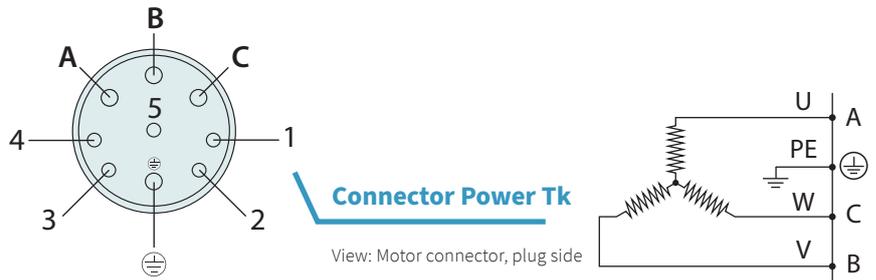


SIN/COS-POSITIONS-FEEDBACK (D0X-INTERFACE FOR 3RD PARTY DRIVES)

The linear motors of the P10-54 series have a contactless, integrated position feedback, which means that an external encoder is not required. The integrated position sensor technology of the motors with D0x interface provides a differential standard 1Vpp sin/cos signal with a 60mm period. The phase position of the sensor signals and the phase currents (with constant force in positive direction) is shown on the right side of the diagram. (The Sin encoder signal is in phase with the current characteristic of phase U).




The arrows show the direction of movement of the slider. The stator remains in its position.

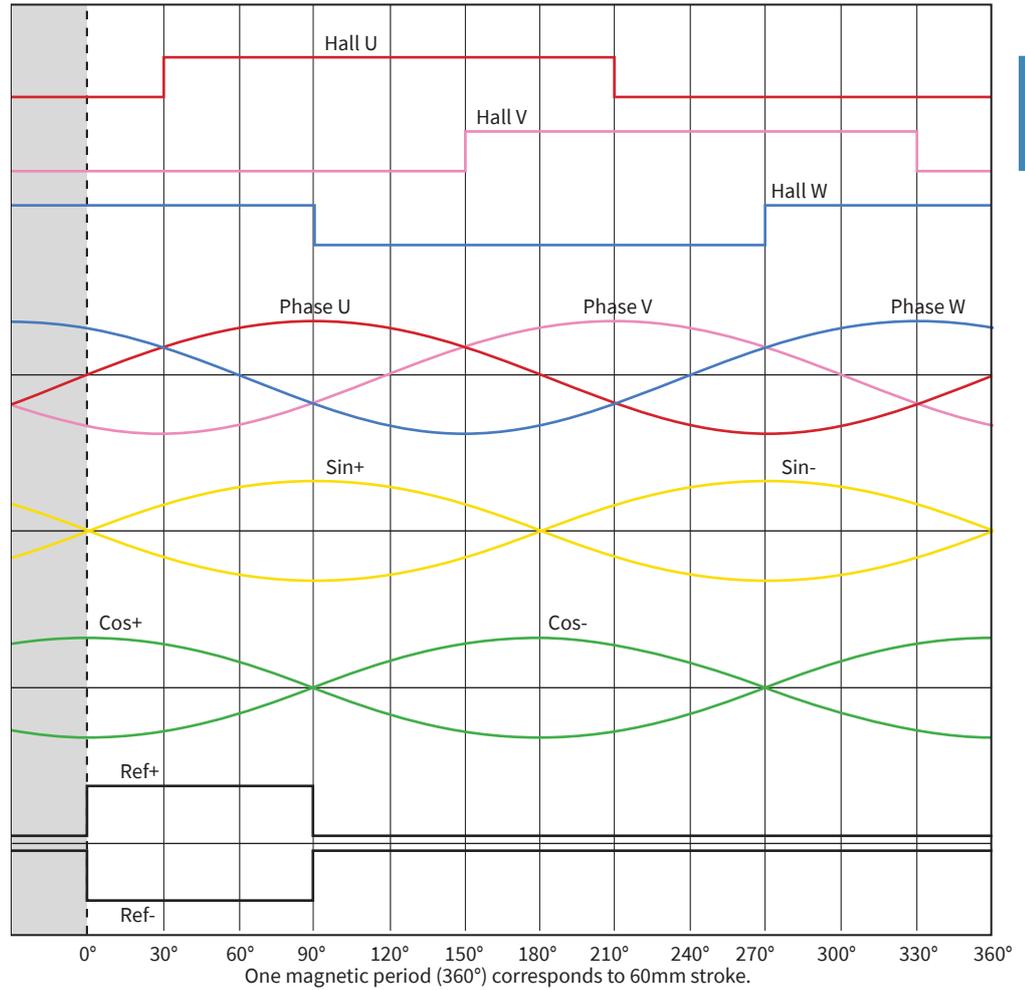

Sin / Cos		P10-54x...-D0x
Output signal period	mm	60
Signal amplitude <sup>1</sup>	V <sub>pp</sub>	1
Termination <sup>1</sup>	Ohm	120
Supply voltage	Vdc	3...13 (w or w/o sense)
Power consumption	mW	< 1000
		( I < 150mA @ 5VDC, I < 80mA @ 12 VDC ) <sup>2</sup>


1) Applicable for Sin+/Sin-, Cos+/Cos- and Ref+/Ref- signals. Hall U/V/W are open collector signals.  
 2) Power efficiency of the motor electronics varies with supply voltage.

**CONNECTOR PS10-54x240U-BL-TU-D04/05 (SIN/COS-INTERFACE FOR 3RD PARTY DRIVES)**

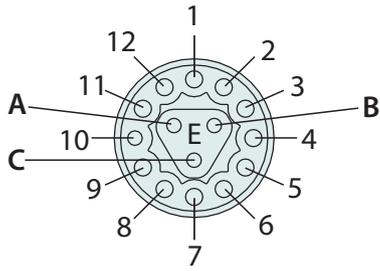


**Connector Encoder Uk**


View: Motor connector, plug side

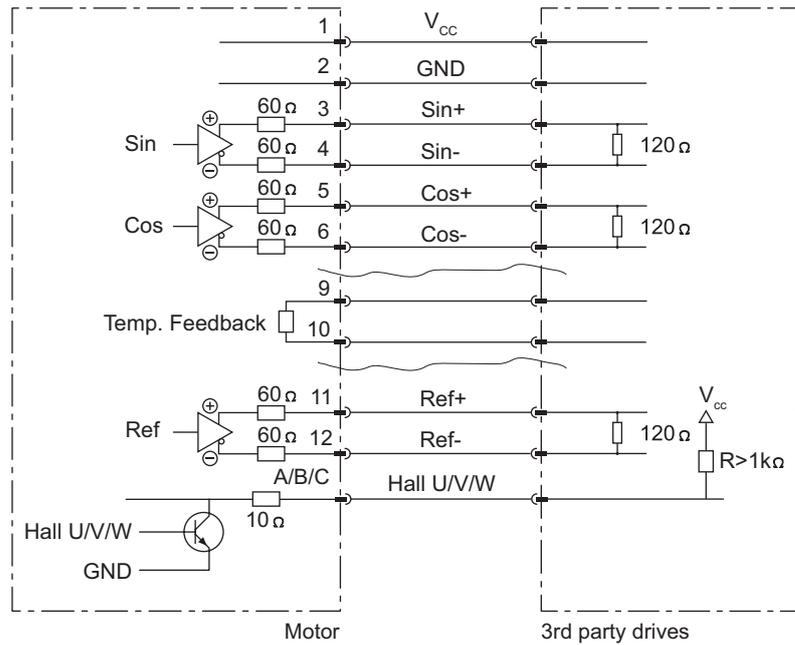

**PS10-54x240U-BL-TU-D04**

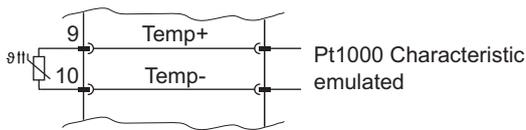



**PS10-54x240U-BL-TU-D05**

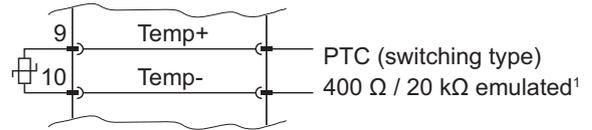


1) ≤ 400 Ω = no error, ≥ 20 kΩ = error

Sin/Cos-Interface: Encoder Connector Wiring				
PS10-54x240U-BL-TU-D04	PS10-54x240U-BL-TU-D05	Function	Connector Encoder Uk	Wire Color Motor Cable KSS05-02/13
	+Vcc	Supply	1	white
	GND	Supply	2	brown
	Sin+	Encoder	3	grey
	Sin-	Encoder	4	pink
	Cos+	Encoder	5	blue
	Cos-	Encoder	6	red
	Do not connect	-	7	-
	Do not connect	-	8	-
Temp+ (Pt1000 Char.)	Temp+ (PTC 400/20k Char.)	Temperature <sup>2</sup>	9	yellow-brown
Temp- (Pt1000 Char.)	Temp- (PTC 400/20k Char.)	Temperature <sup>2</sup>	10	white-yellow
	Ref+	Encoder	11	black
	Ref-	Encoder	12	violett
	Hall U	Encoder	A	grey-red
	Hall V	Encoder	B	red-blue
	Hall W	Encoder	C	white-green


2) The temperature evaluation circuit must have the same galvanic reference potential as the encoder circuit (supply). It should therefore be connected to the supply GND. For correct evaluation, the connection potentials of the emulated temperature sensor must be in the range of the supply potentials. Valid temperature values can only be measured 50ms after the encoder supply is applied. In the currentless state, a resistance of 200kOhm is measured between pin 9 and 10 is measured. The maximum voltage between pin 9 and 10 must not exceed 16VDC. The maximum current is 15mA.

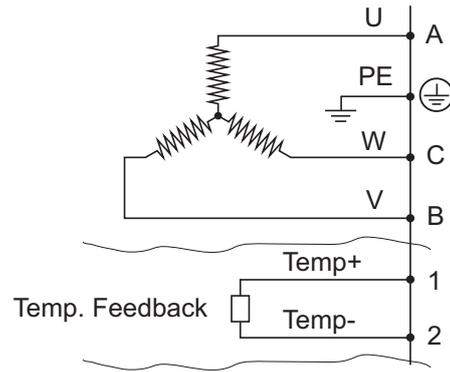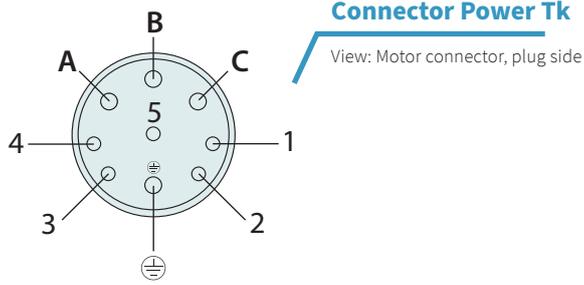

**PS10-54X240U-BL-TU-D04**

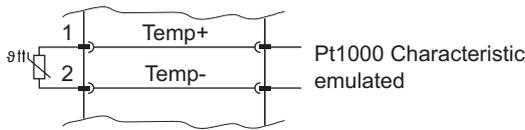

**PS10-54X240U-BL-TU-D05**

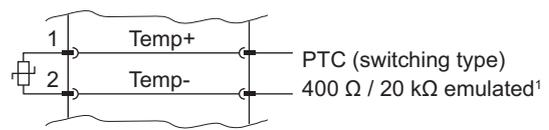

1) ≤ 400 Ω = no error, ≥ 20 kΩ = error

Sin/Cos-Interface: Power Connector Wiring			
PS10-54x240U-BL-TU-D04	PS10-54x240U-BL-TU-D05	Connector Power Tk	Wire Color Motor Cable KPS07-04/02
	Phase U	A	red
	PE	PE	yellow-green
	Phase V	B	blue
	Phase W	C	black (before: green)
Pt1000+ <sup>1)</sup>	PTC+ <sup>1)</sup>	1	cyan
Pt1000- <sup>1)</sup>	PTC- <sup>1)</sup>	2	grey
n. c.	n. c.	3	n. c.
n. c.	n. c.	4	n. c.
n. c.	n. c.	5	n. c.

1) The temperature evaluation circuit must have the same galvanic reference potential as the encoder circuit (supply). It should therefore be connected to the supply GND. For correct evaluation, the connection potentials of the emulated temperature sensor must be in the range of the supply potentials. Valid temperature values can only be measured 50ms after the encoder supply is applied. In currentless state a resistance of 200kOhm is measured between pin 1 and 2. The maximum voltage between pin 1 and 2 must not exceed 16VDC. The maximum current is 15mA.

**TEMPERATURE FEEDBACK DX4 / DX5**

Overheating protection is provided by three internal thermistors embedded in the motor windings. These thermistors are monitored by the motor electronics. A single thermistor is tracked based on the maximum of the temperature readings. This is done to accurately monitor the temperature along the entire length of the stator and to react as quickly as possible to dynamic changes in a single motor phase. When the motor winding temperature reaches its absolute maximum value, the drive amplifier/servo controller must shut down the motor to protect the motor from overheating dam-

age. To support the temperature evaluation given by the drive amplifier/servocontroller, the various temperature interfaces -Dx4 or -Dx5 are available. Depending on the interface used and the signals used, there are suitable motor cables (see overview table, section Accessories/Motor cables).

**Dx4 (Pt1000 dual)**

An emulated **Pt1000 thermistor** is available on both the **signal and the power connector** for evaluating the max. motor temperature.

**Dx5 (PTC dual)**

An emulated **PTC thermistor** is available on both **the signal and the power connector**, which changes to the high-impedance state when the max. motor temperature is exceeded.

**A/B INCREMENTAL POSITION FEEDBACK (D2X- INTERFACE FOR 3RD PARTY DRIVES)**


The linear motors of the P10-54 series have a contactless, integrated position feedback, which means that an external encoder is not required.

The position output of the motors with D2x interface is an industry-standard A/B incremental signal with supplementary reference signal (RS422). Hall switch signals are available for commutation. The relationship between the phase current and the position sensor output is shown on the right.

4




The arrows show the direction of movement of the slider. The stator remains in its position.

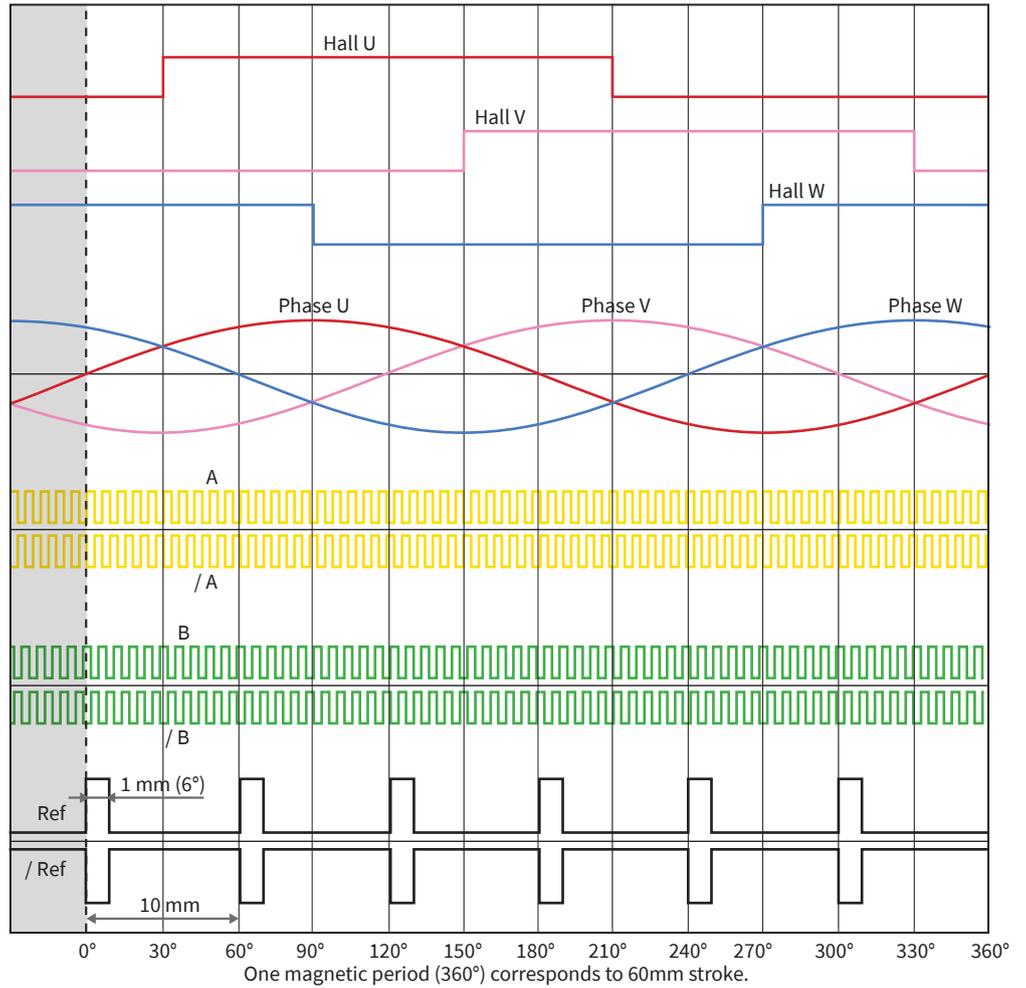

Example:  
 Min. pulse interval  $t = 500 \text{ ns}$   
 For downstream evaluation, at least the following counter frequency is required:  
 $f_{\text{counter}} = 1 / \text{pulse interval}$   
 $= 1 / 500 \text{ ns} = 2 \text{ MHz}$




The logical state of signals A and B is not defined in relation to the reference signal Ref. The signal shape may differ from the illustration.

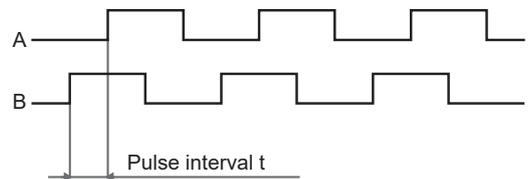

A / B		P10-54x...-D2x	P10-54x...-D2xS
Position Resolution	$\mu\text{m}$	1	5
Output Type		RS422	
Min. Edge Distance $t$	ns	100	500
Min. required counter frequency	MHz	10	2
Supply Voltage	Vdc	5-12	
Max. Supply Current	mA	300	300


**CONNECTOR PS10-54x240U-BL-TU-D24 / D24S / 25 / 25S / 26 (A/B-INTERFACE FOR 3RD PARTY DRIVES)**

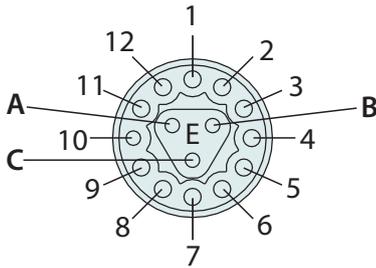


**Connector Encoder Uk**

View: Motor connector, plug side


**PS10-54x240U-BL-TU-D24  
PS10-54x240U-BL-TU-D24S**

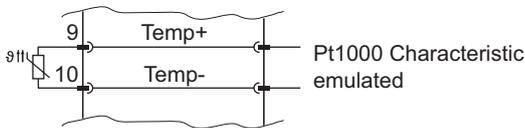


**PS10-54x240U-BL-TU-D25  
PS10-54x240U-BL-TU-D25S**

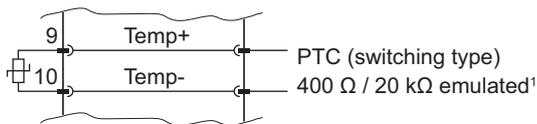

1) ≤ 400 Ω = no error, ≥ 20 kΩ = error

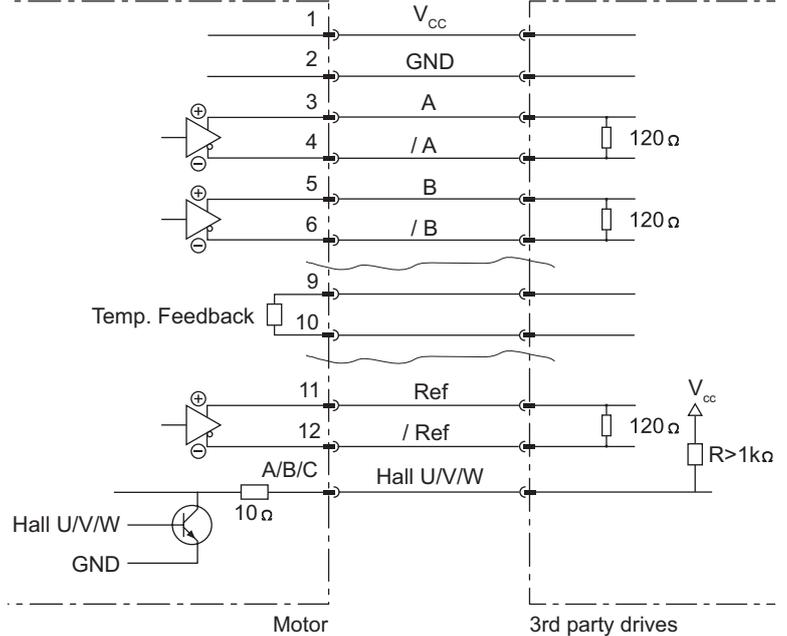


**PS10-54x240U-BL-TU-D26**

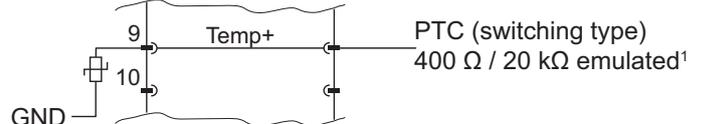

1) ≤ 400 Ω = no error, ≥ 20 kΩ = error


A/B-Interface: Encoder Connector Wiring			Function	Connector Encoder Uk	Wire Color Motor Cable KSS05-02/13
PS10-54x240U-BL-TU-D24 PS10-54x240U-BL-TU-D24S	PS10-54x240U-BL-TU-D25 PS10-54x240U-BL-TU-D25S	PS10-54x240U-BL-TU-D26	+Vcc	1	white
			GND	2	brown
			A	3	grey
			/A	4	pink
			B	5	blue
			/B	6	red
			Do not connect	7	-
			Do not connect	8	-
Temp+ (Pt1000 Char.)	Temp+ (PTC 400/20k Char.)	Temp+ (PTC 400/20k Char.)	Temperature²	9	yellow-brown
Temp- (Pt1000 Char.)	Temp- (PTC 400/20k Char.)	Do not connect	Temperature²	10	white-yellow
			Ref	11	black
			/ Ref	12	violett
			Hall U	A	grey-red
			Hall V	B	red-blue
			Hall W	C	white-green

2) The temperature evaluation circuit must have the same galvanic reference potential as the encoder circuit (supply). It should therefore be connected to the supply GND. For correct evaluation, the connection potentials of the emulated temperature sensor must be in the range of the supply potentials. Valid temperature values can only be measured 50ms after the encoder supply is applied. In the currentless state, a resistance of 200kOhm is measured between pin 9 and 10 is measured. The maximum voltage between pin 9 and 10 must not exceed 16VDC. The maximum current is 15mA.

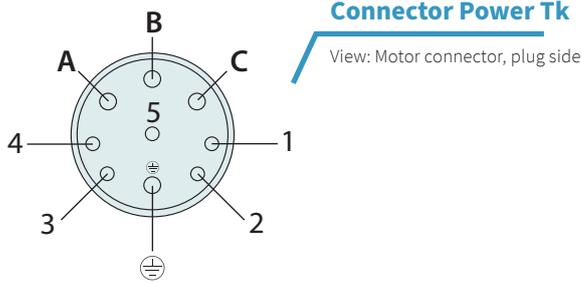


**Connector Power Tk**

View: Motor connector, plug side

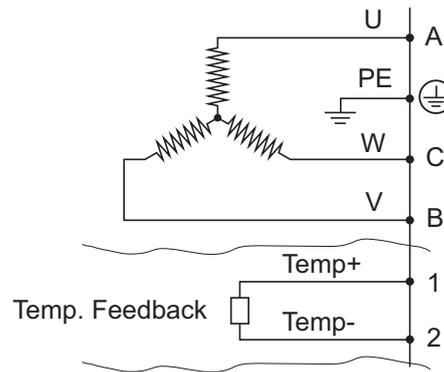


**PS10-54x240U-BL-TU-D24**  
**PS10-54x240U-BL-TU-D24S**

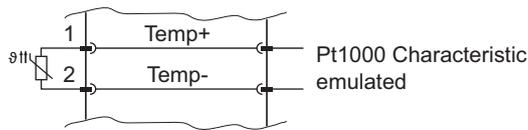

Pt1000 Characteristic emulated

**PS10-54x240U-BL-TU-D25**  
**PS10-54x240U-BL-TU-D25S**

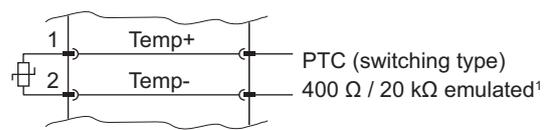

PTC (switching type)  
400 Ω / 20 kΩ emulated<sup>1</sup>

1) ≤ 400 Ω = no error, ≥ 20 kΩ = error

A/B-Interface: Power Connector Wiring

PS10-54x240U-BL-TU-D24 PS10-54x240U-BL-TU-D24S	PS10-54x240U-BL-TU-D25 PS10-54x240U-BL-TU-D25S	PS10-54x240U-BL-TU-D26	Connector Power Tk	Wire Color Motor Cable KPS07-04/02
		Phase U	A	red
		PE	PE	yellow-green
		Phase V	B	blue
		Phase W	C	black (before: green)
Pt1000+ <sup>1)</sup>	PTC+ <sup>1)</sup>	Do not connect	1	cyan
Pt1000- <sup>1)</sup>	PTC- <sup>1)</sup>	Do not connect	2	grey
n. c.	n. c.	n. c.	3	n. c.
n. c.	n. c.	n. c.	4	n. c.
n. c.	n. c.	n. c.	5	n. c.

1) The temperature evaluation circuit must have the same galvanic reference potential as the encoder circuit (supply). It should therefore be connected to the supply GND. For correct evaluation, the connection potentials of the emulated temperature sensor must be in the range of the supply potentials. Valid temperature values can only be measured 50ms after the encoder supply is applied. In currentless state a resistance of 200kOhm is measured between pin 1 and 2. The maximum voltage between pin 1 and 2 must not exceed 16VDC. The maximum current is 15mA.

**TEMPERATURE FEEDBACK DX4 / DX5 / DX6**

Overheating protection is provided by three internal thermistors embedded in the motor windings. These thermistors are monitored by the motor electronics. A single thermistor is replicated based on the maximum of the temperature readings. This is done to accurately monitor the temperature along the entire length of the stator and to react as quickly as possible to dynamic changes in a single motor phase. When the motor winding temperature reaches its absolute maximum value, the drive amplifier/servo controller must shut down the motor to protect the motor from overheating damage. To support the temperature evaluation given by the drive amplifier/servo controller, different temperature interfaces -DX4, -DX5

or -DX6 are available. Depending on the interface used and the signals used, there are suitable motor cables (see overview table section Accessories/Motor cables).

**Dx4 (Pt1000 dual)**

An emulated **Pt1000 thermistor** is available on both the **signal and the power connector** for evaluating the max. motor temperature.

**Dx5 (PTC dual)**

An emulated **PTC thermistor** is available on both the **signal and the power connector**, which changes to the high-impedance state when the max. motor temperature is exceeded.

**Dx6 (PTC)**

An emulated PTC thermistor is available on the **signal connector**, which changes to the high-impedance state when the max. motor temperature is exceeded. The emulated **PTC** is internally **connected to GND on one side**, which is why only one additional signal line is connected to the servocontroller in addition to the power supply for evaluation.


**BISS-C POSITION FEEDBACK (D3X- INTERFACE FOR 3RD PARTY DRIVES)**

The linear motors of the P10-54 series have contactless, integrated position feedback, which means that there is no need for an external encoder.

The position feedback of the motors with D3x interface is based on RS422 and the industry-standard BiSS-C protocol. Either the transmitted position or the hall switch signals can be used for commutation. The relationship between the phase current and the encoder signals is shown on the right.



The arrows show the direction of movement of the slider. The stator remains in its position.

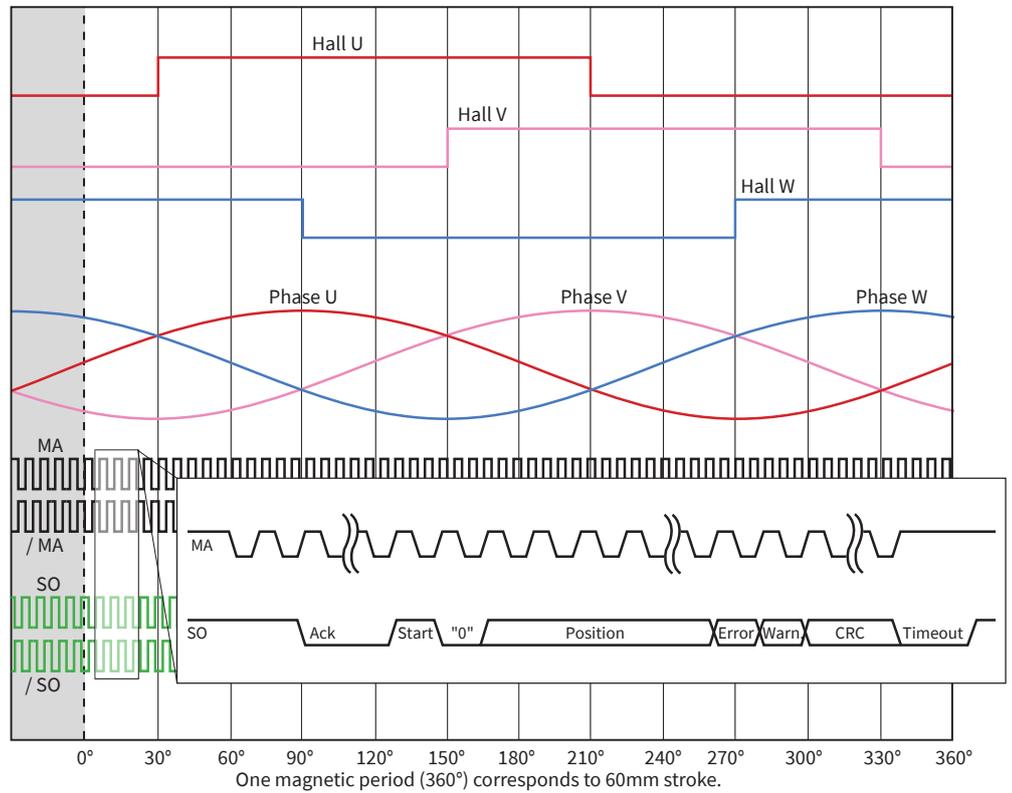

BiSS-C <sup>1)</sup>	P10-54x...-D3x			
Singleturn Position Resolution	µm	1		
Output Type		RS422		
MA Clock frequency	MHz	1...3.3		
Max. request cycle rate <sup>2)</sup>	kHz	16		
Supply Voltage	Vdc	5 -12		
Max. Supply Current	mA	300		
Data Type		SCDS (Single Cycle Data Sensor)		
Data (Bits)		Position	nER	nWA
		Singleturn	1	1
		34		
Data Format and Alignment		Binary coded, MSB first, right aligned		
CRC polynomial		0x43 (X <sup>6</sup> + X <sup>1</sup> + X <sup>0</sup> ) – CRC bit length 6 bits, CRC is inverted		
CRC Starting Value		0x00		
BISS Timeout (tm)	µs	~20		
Switch-on Delay	ms	100		

1) Compatible with bidirectional interfaces supporting EDS register access and unidirectional interfaces  
 2) Achievable only if the data transmission time is shorter than one request cycle. Recommended MA Clock frequency 2MHz.


**Commutation Angle**

$$\text{Commutation Angle} = (\text{Position mod magnetic Period}) \cdot \frac{360^\circ}{\text{Magnetic Period}}$$

First, the position data is reduced to the range within a magnetic period using modulo.

This relative position value is then converted into an electrical angle.

**BISS-C-FRAME DESCRIPTION**

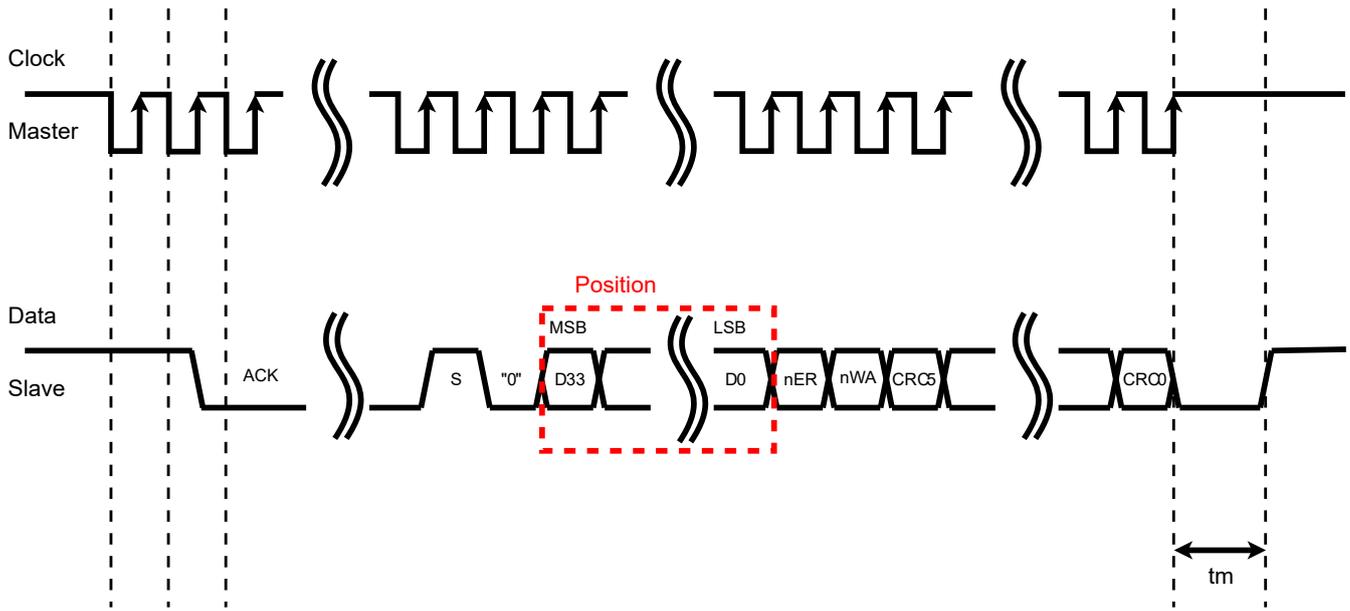

**Singleturn Position 34 Bit: D33-D0**

Binary coded, MSB first  
 Resolution per bit = 1  $\mu$ m  
 After switching on the encoder, the position starts with an offset of 3 m. In addition to the offset, the current position angle of the slider within a pole pair (magnetic period) of the motor is added to this. This position can be used for commutation.

**Errorbit: nER**

0: error; 1: no error (active low).  
 Indicates an encoder error. If this bit indicates an error, the position must be treated as invalid.

**Warnbit: nWA**

0: warning; 1: no warning (active low).  
 Displays encoder warnings. The position is still valid if only a warning is displayed.

**CRC 6 Bit: CRC5-0**

Polynomial : 0x43  
 Initial value : 0x00  
 The CRC is calculated via position, error and warning bits.  
 It is transmitted with MSB first and inverted. The start bit and the "0" bit are omitted from the CRC calculation.


**Register and Memory Definitions**

A description of how a BiSS-C master can access registers can be found at [www.biss-interface.com](http://www.biss-interface.com).

**BiSS-C - XML**


The encoder is compatible with the "Standard Encoder Profile (BP3)".  
 The function of the XML file is to automatically assign device properties in the master using the BiSS identifier.  
 The XML file can be used by masters to facilitate the configuration of slave devices. It can be downloaded from [www.linmot.com](http://www.linmot.com).

**CONNECTOR PS10-54x240U-BL-TU-D34 (BISS-C-INTERFACE FOR 3RD PARTY DRIVES)**

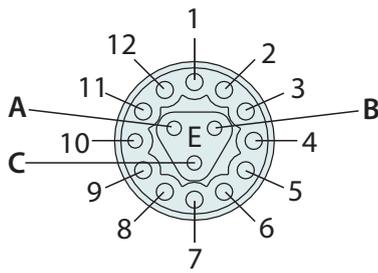



**Connector Encoder Uk**

View: Motor connector, plug side

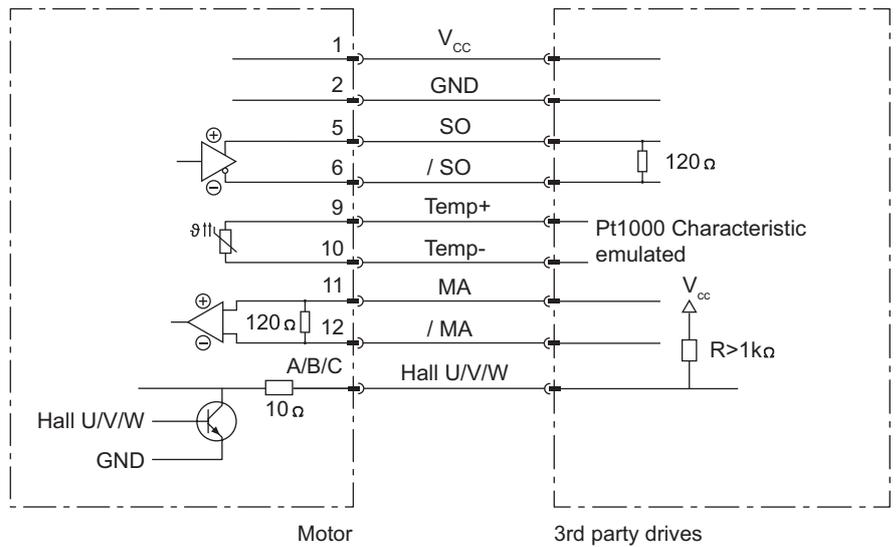

BiSS-C-Interface: Encoder Connector Wiring			
PS10-54x240U-BL-TU-D34	Function	Connector Encoder Uk	Wire Color Motor Cable KSS05-02/13
+Vcc	Supply	1	white
GND	Supply	2	brown
Do not connect	-	3	-
Do not connect	-	4	-
SO (Slave out)	Encoder RS422	5	blue
/ SO (Slave out)	Encoder RS422	6	red
Do not connect	-	7	-
Do not connect	-	8	-
Temp+ (Pt1000 Char.)	Temperature <sup>1)</sup>	9	yellow-brown
Temp- (Pt1000 Char.)	Temperature <sup>1)</sup>	10	white-yellow
MA (Master clock)	Encoder RS422	11	black
/ MA (Master clock)	Encoder RS422	12	violett
Hall U	Encoder	A	grey-red
Hall V	Encoder	B	red-blue
Hall W	Encoder	C	white-green

1) The temperature evaluation circuit must have the same galvanic reference potential as the encoder circuit (supply). It should therefore be connected to the supply GND. For correct evaluation, the connection potentials of the emulated temperature sensor must be in the range of the supply potentials. Valid temperature values can only be measured 50ms after the encoder supply is applied. In the currentless state, a resistance of 200kOhm is measured between pin 9 and 10 is measured. The maximum voltage between pin 9 and 10 must not exceed 16VDC. The maximum current is 15mA.

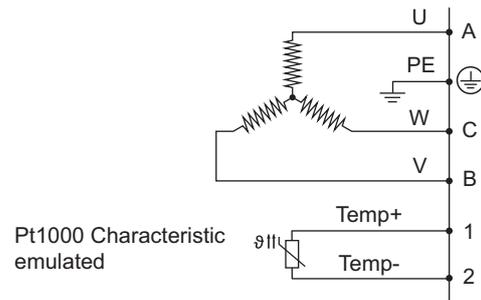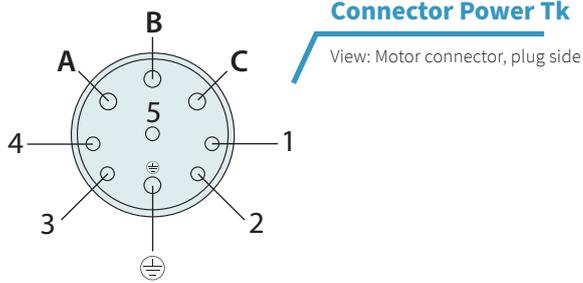

BiSS-C-Interface: Power Connector Wiring		
PS10-54x240U-BL-TU-D34	Connector Power Tk	Wire Color Motor Cable KPS07-04/02
Phase U	A	red
PE	PE	yellow-green
Phase V	B	blue
Phase W	C	black (before: green)
Pt1000+ <sup>1)</sup>	1	cyan
Pt1000- <sup>1)</sup>	2	grey
n. c.	3	n. c.
n. c.	4	n. c.
n. c.	5	n. c.

1) The temperature evaluation circuit must have the same galvanic reference potential as the encoder circuit (supply). It should therefore be connected to the supply GND. For correct evaluation, the connection potentials of the emulated temperature sensor must be in the range of the supply potentials. Valid temperature values can only be measured 50ms after the encoder supply is applied. In currentless state a resistance of 200kOhm is measured between pin 1 and 2. The maximum voltage between pin 1 and 2 must not exceed 16VDC. The maximum current is 15mA.

## TEMPERATUR FEEDBACK DX4

Overheating protection is provided by three internal thermistors embedded in the motor windings. These thermistors are monitored by the motor electronics. A single thermistor is tracked based on the maximum of the temperature readings. This is done to accurately monitor the temperature along the entire length of the stator and to react as quickly as possible to dynamic changes in a single motor phase. When the motor winding temperature reaches its ab-

solute maximum value, the drive amplifier/servo controller must shut down the motor to protect the motor from overheating damage. To support the temperature evaluation given by the drive amplifier/servocontroller, different temperature interfaces -DX4, -DX5 or -DX6 are available. Depending on the interface used and the signals used, there are suitable motor cables (see overview table, section Accessories/Motor cables).


### Dx4 (Pt1000 dual)

An emulated **Pt1000 thermistor** is available on both the **signal and the power connector** for evaluating the max. motor temperature.

**LÄUFER**

**Läufer Standard**


Nutenanzahl bestimmt den Läufer Typ (siehe Kap.2 / Läufer) und kennzeichnet das vordere Läuferende.

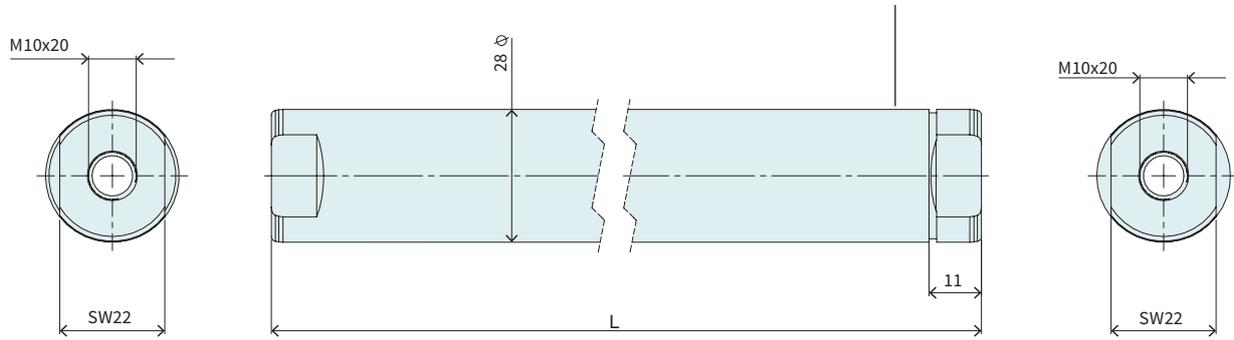

Läufer Standard			
Artikel	Beschreibung	Max. Hub [mm]	Artikelnummer
PL01-28x410/330	Läufer 'standard'	130	<a href="#">0150-1381</a>
PL01-28x500/420	Läufer 'standard'	220	<a href="#">0150-1382</a>
PL01-28x620/540	Läufer 'standard'	340	<a href="#">0150-1383</a>
PL01-28x710/630	Läufer 'standard'	430	<a href="#">0150-1384</a>
PL01-28x800/720	Läufer 'standard'	520	<a href="#">0150-1385</a>
PL01-28x920/840	Läufer 'standard'	640	<a href="#">0150-1386</a>
PL01-28x1010/930	Läufer 'standard'	730	<a href="#">0150-1387</a>
PL01-28x1220/1140	Läufer 'standard'	940	<a href="#">0150-1388</a>
PL01-28x1400/1320	Läufer 'standard'	1120	<a href="#">0150-1389</a>
PL01-28x1610/1530	Läufer 'standard'	1330	<a href="#">0150-1390</a>
PL01-28x1820/1740	Läufer 'standard'	1540	<a href="#">0150-1395</a>
PL01-28x2000/1920	Läufer 'standard'	1720	<a href="#">0150-1396</a>

**P10-54x240U/10-BL-TU**

**Max. Stroke:** 10 mm  
**Peak Force:** 669 N

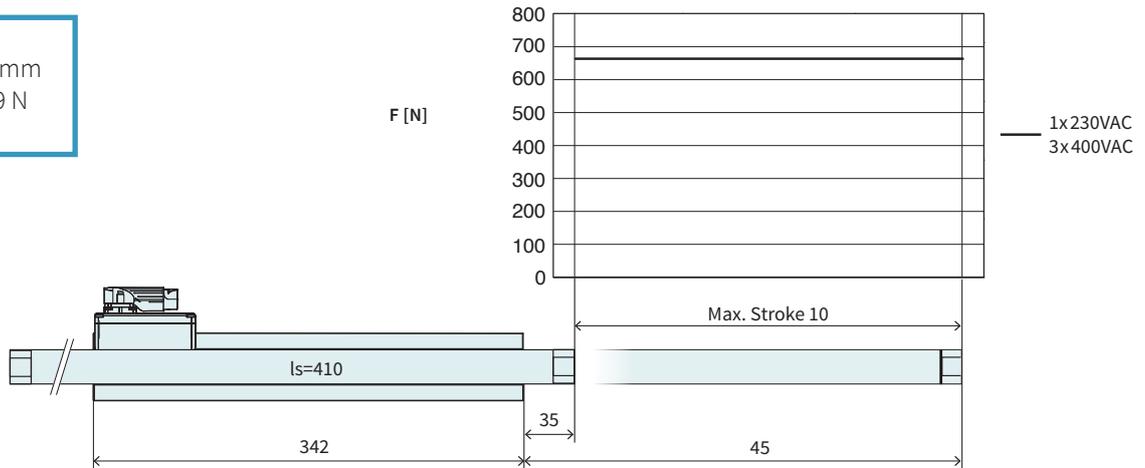


Dimensions in mm

Technical Data P10-54x240U/10

Stroke			
Max. Stroke	mm (in)		10 (0.39)
Force			
Max. Force <sup>1</sup> @ 1x230VAC	N (lbf)		669 (150)
Max. Force <sup>1</sup> @ 3x400VAC	N (lbf)		669 (150)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N (lbf)		110 / 150 / 210 (25 / 34 / 48)
Max. Border Force relative	%		100
Force Constant 1	N/A <sub>pk</sub> (lbf/A <sub>pk</sub> )		44 (9.89)
Force Constant 2	N/A <sub>rms</sub> (lbf/A <sub>rms</sub> )		62.2 (14)
Velocity			
Max. Velocity @ 1x230VAC	m/s (in/s)		4.1 (159.9)
Max. Velocity @ 3x400VAC	m/s (in/s)		7.1 (7.1)
Position Detection			
Repeatability	mm (in)		±0.05 (±0.002)
Linearity	%		± 7.6
Electrical Data			
Max. Current <sup>1</sup> @ 1x230VAC	A <sub>pk</sub> / A <sub>rms</sub>		15.1 / 10.6
Max. Current <sup>1</sup> @ 3x400VAC	A <sub>pk</sub> / A <sub>rms</sub>		15.1 / 10.6
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A <sub>pk</sub>		2.5 / 3.5 / 4.9
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A <sub>rms</sub>		1.8 / 2.4 / 3.4
Thermal Data			
Max. Winding Temperature (Sensor)	°C		90
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W		1.3 / 0.65 / 0.33
Thermal Time Constant [Passive cooling / Fan / Fluid]	s		1300 / 650 / 330
Mechanical Data			
Slider Length	mm (in)		410 (16)
Slider Mass	g (lb)		1740 (3.83)


1) Real time calculation of motor winding temperature is required (including monitoring).  
 If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 70 % of the peak value has to be taken instead.

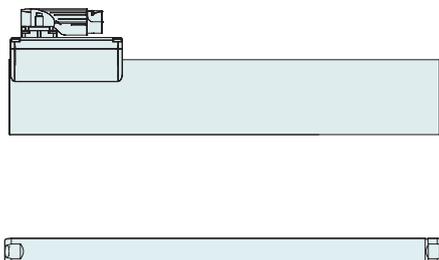

Item	Description	Item-No.
<b>PS10-54x240U-BL-TU</b>	Stator 3x400VAC, LinMot Encoder	<a href="#">0150-2724</a>
<b>PS10-54x240U-BL-TU-D04</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	<a href="#">0150-4410</a>
<b>PS10-54x240U-BL-TU-D05</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	<a href="#">0150-4593</a>
<b>PS10-54x240U-BL-TU-D24</b>	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	<a href="#">0150-2750</a>
<b>PS10-54x240U-BL-TU-D24S</b>	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	<a href="#">0150-4050</a>
<b>PS10-54x240U-BL-TU-D25</b>	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	<a href="#">0150-2754</a>
<b>PS10-54x240U-BL-TU-D25S</b>	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	<a href="#">0150-2784</a>
<b>PS10-54x240U-BL-TU-D26</b>	Stator 3x400VAC, A/B Encoder, PTC single ended	<a href="#">0150-2957</a>
<b>PS10-54x240U-BL-TU-D34</b>	Stator 3x400VAC, BiSS-C Encoder, Pt1000 dual	<a href="#">0150-5772</a>
<b>PL01-28x410/330</b>	Slider 'standard'	<a href="#">0150-1381</a>

**P10-54x240U/100-BL-TU**


**Max. Stroke:** 100 mm  
**Peak Force:** 669 N

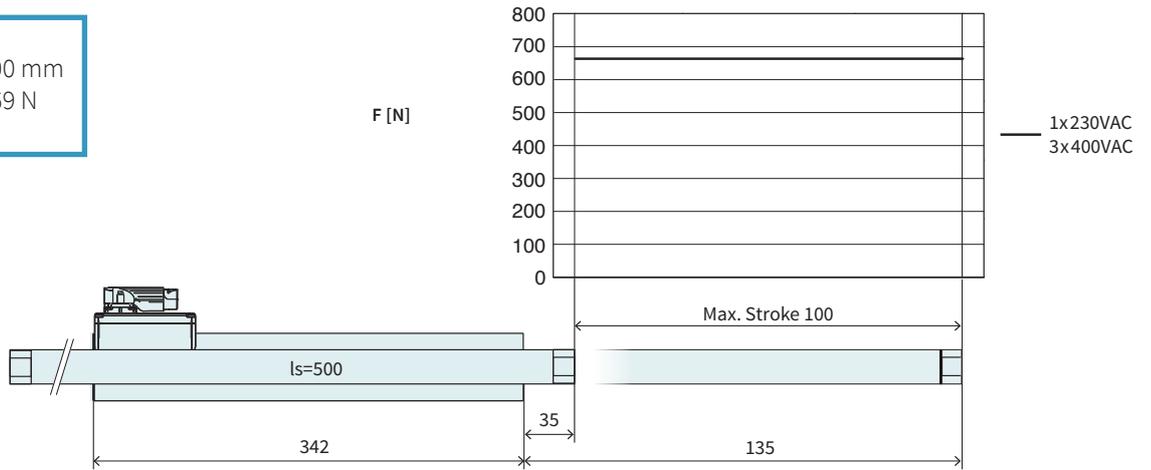

Dimensions in mm

Technical Data P10-54x240U/100				
<b>Stroke</b>				
Max. Stroke	mm	(in)	100	(3.93)
<b>Force</b>				
Max. Force <sup>1</sup> @ 1x230VAC	N	(lbf)	669	(150)
Max. Force <sup>1</sup> @ 3x400VAC	N	(lbf)	669	(150)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N	(lbf)	110 / 150 / 210	(25 / 34 / 48)
Max. Border Force relative	%		100	
Force Constant 1	N/A <sub>pk</sub>	(lbf/A <sub>pk</sub> )	44	(9.89)
Force Constant 2	N/A <sub>rms</sub>	(lbf/A <sub>rms</sub> )	62.2	(14)
<b>Velocity</b>				
Max. Velocity @ 1x230VAC	m/s	(in/s)	4.1	(159.9)
Max. Velocity @ 3x400VAC	m/s	(in/s)	7.1	(7.1)
<b>Position Detection</b>				
Repeatability	mm	(in)	±0.05	(±0.002)
Linearity	%		± 0.85	
<b>Electrical Data</b>				
Max. Current <sup>1</sup> @ 1x230VAC	A <sub>pk</sub> / A <sub>rms</sub>		15.1 / 10.6	
Max. Current <sup>1</sup> @ 3x400VAC	A <sub>pk</sub> / A <sub>rms</sub>		15.1 / 10.6	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A <sub>pk</sub>		2.5 / 3.5 / 4.9	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A <sub>rms</sub>		1.8 / 2.4 / 3.4	
<b>Thermal Data</b>				
Max. Winding Temperature (Sensor)	°C		90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W		1.3 / 0.65 / 0.33	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s		1300 / 650 / 330	
<b>Mechanical Data</b>				
Slider Length	mm	(in)	500	(20)
Slider Mass	g	(lb)	2160	(4.75)


1) Real time calculation of motor winding temperature is required (including monitoring).  
 If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 70 % of the peak value has to be taken instead.

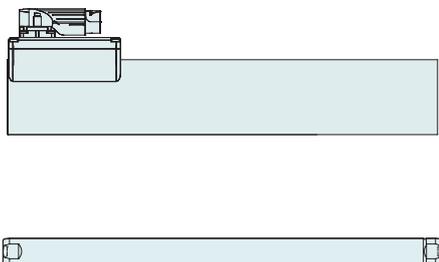

Item	Description	Item-No.
<b>PS10-54x240U-BL-TU</b>	Stator 3x400VAC, LinMot Encoder	<a href="#">0150-2724</a>
<b>PS10-54x240U-BL-TU-D04</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	<a href="#">0150-4410</a>
<b>PS10-54x240U-BL-TU-D05</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	<a href="#">0150-4593</a>
<b>PS10-54x240U-BL-TU-D24</b>	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	<a href="#">0150-2750</a>
<b>PS10-54x240U-BL-TU-D24S</b>	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	<a href="#">0150-4050</a>
<b>PS10-54x240U-BL-TU-D25</b>	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	<a href="#">0150-2754</a>
<b>PS10-54x240U-BL-TU-D25S</b>	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	<a href="#">0150-2784</a>
<b>PS10-54x240U-BL-TU-D26</b>	Stator 3x400VAC, A/B Encoder, PTC single ended	<a href="#">0150-2957</a>
<b>PS10-54x240U-BL-TU-D34</b>	Stator 3x400VAC, BiSS-C Encoder, Pt1000 dual	<a href="#">0150-5772</a>
<b>PL01-28x500/420</b>	Slider 'standard'	<a href="#">0150-1382</a>

**P10-54x240U/220-BL-TU**

**Max. Stroke:** 220 mm  
**Peak Force:** 669 N

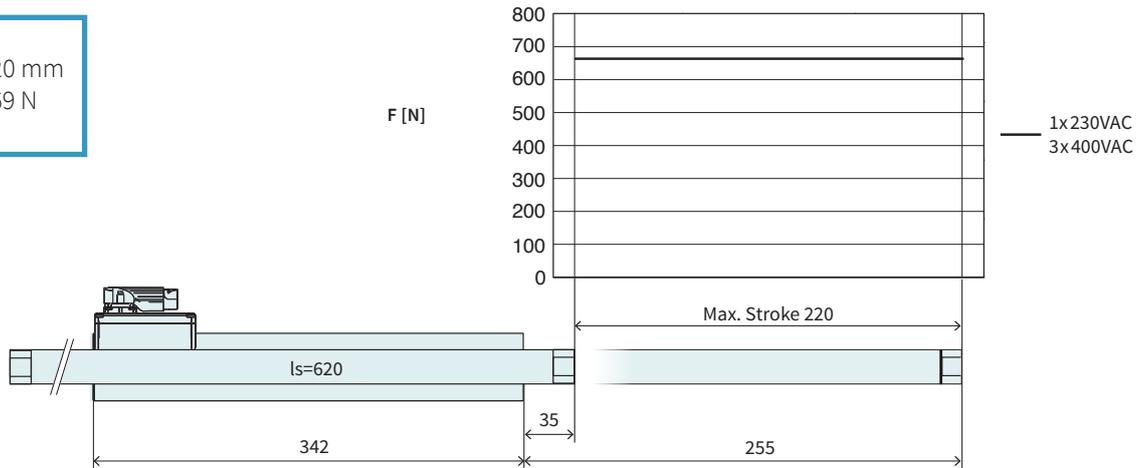


Dimensions in mm

**Technical Data P10-54x240U/220**

Stroke			
Max. Stroke	mm (in)		220 (8.65)
Force			
Max. Force <sup>1</sup> @ 1x230VAC	N (lbf)		669 (150)
Max. Force <sup>1</sup> @ 3x400VAC	N (lbf)		669 (150)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N (lbf)		110 / 150 / 210 (25 / 34 / 48)
Max. Border Force relative	%		100
Force Constant 1	N/A <sub>pk</sub> (lbf/A <sub>pk</sub> )		44 (9.89)
Force Constant 2	N/A <sub>rms</sub> (lbf/A <sub>rms</sub> )		62.2 (14)
Velocity			
Max. Velocity @ 1x230VAC	m/s (in/s)		4.1 (159.9)
Max. Velocity @ 3x400VAC	m/s (in/s)		7.1 (7.1)
Position Detection			
Repeatability	mm (in)		±0.05 (±0.002)
Linearity	%		± 0.45
Electrical Data			
Max. Current <sup>1</sup> @ 1x230VAC	A <sub>pk</sub> / A <sub>rms</sub>		15.1 / 10.6
Max. Current <sup>1</sup> @ 3x400VAC	A <sub>pk</sub> / A <sub>rms</sub>		15.1 / 10.6
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A <sub>pk</sub>		2.5 / 3.5 / 4.9
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A <sub>rms</sub>		1.8 / 2.4 / 3.4
Thermal Data			
Max. Winding Temperature (Sensor)	°C		90
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W		1.3 / 0.65 / 0.33
Thermal Time Constant [Passive cooling / Fan / Fluid]	s		1300 / 650 / 330
Mechanical Data			
Slider Length	mm (in)		620 (24)
Slider Mass	g (lb)		2720 (5.98)


<sup>1</sup>) Real time calculation of motor winding temperature is required (including monitoring).  
 If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 70 % of the peak value has to be taken instead.

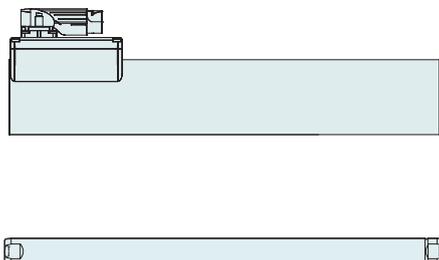

Item	Description	Item-No.
<b>PS10-54x240U-BL-TU</b>	Stator 3x400VAC, LinMot Encoder	<a href="#">0150-2724</a>
<b>PS10-54x240U-BL-TU-D04</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	<a href="#">0150-4410</a>
<b>PS10-54x240U-BL-TU-D05</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	<a href="#">0150-4593</a>
<b>PS10-54x240U-BL-TU-D24</b>	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	<a href="#">0150-2750</a>
<b>PS10-54x240U-BL-TU-D24S</b>	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	<a href="#">0150-4050</a>
<b>PS10-54x240U-BL-TU-D25</b>	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	<a href="#">0150-2754</a>
<b>PS10-54x240U-BL-TU-D25S</b>	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	<a href="#">0150-2784</a>
<b>PS10-54x240U-BL-TU-D26</b>	Stator 3x400VAC, A/B Encoder, PTC single ended	<a href="#">0150-2957</a>
<b>PS10-54x240U-BL-TU-D34</b>	Stator 3x400VAC, BiSS-C Encoder, Pt1000 dual	<a href="#">0150-5772</a>
<b>PL01-28x620/540</b>	Slider 'standard'	<a href="#">0150-1383</a>

**P10-54x240U/310-BL-TU**


**Max. Stroke:** 310 mm  
**Peak Force:** 669 N

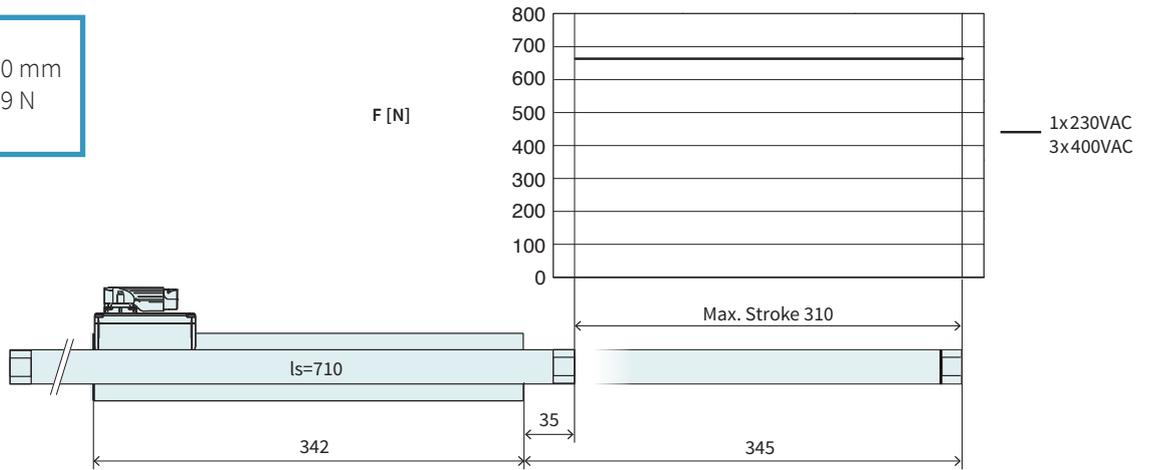

Dimensions in mm

Technical Data P10-54x240U/310				
<b>Stroke</b>				
Max. Stroke	mm	(in)	310	(12.19)
<b>Force</b>				
Max. Force <sup>1</sup> @ 1x230VAC	N	(lbf)	669	(150)
Max. Force <sup>1</sup> @ 3x400VAC	N	(lbf)	669	(150)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N	(lbf)	110 / 150 / 210	(25 / 34 / 48)
Max. Border Force relative	%		100	
Force Constant 1	N/A <sub>pk</sub>	(lbf/A <sub>pk</sub> )	44	(9.89)
Force Constant 2	N/A <sub>rms</sub>	(lbf/A <sub>rms</sub> )	62.2	(14)
<b>Velocity</b>				
Max. Velocity @ 1x230VAC	m/s	(in/s)	4.1	(159.9)
Max. Velocity @ 3x400VAC	m/s	(in/s)	7.1	(7.1)
<b>Position Detection</b>				
Repeatability	mm	(in)	±0.05	(±0.002)
Linearity	%		± 0.35	
<b>Electrical Data</b>				
Max. Current <sup>1</sup> @ 1x230VAC	A <sub>pk</sub> / A <sub>rms</sub>		15.1 / 10.6	
Max. Current <sup>1</sup> @ 3x400VAC	A <sub>pk</sub> / A <sub>rms</sub>		15.1 / 10.6	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A <sub>pk</sub>		2.5 / 3.5 / 4.9	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A <sub>rms</sub>		1.8 / 2.4 / 3.4	
<b>Thermal Data</b>				
Max. Winding Temperature (Sensor)	°C		90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W		1.3 / 0.65 / 0.33	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s		1300 / 650 / 330	
<b>Mechanical Data</b>				
Slider Length	mm	(in)	710	(28)
Slider Mass	g	(lb)	3140	(6.91)


1) Real time calculation of motor winding temperature is required (including monitoring).  
 If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 70 % of the peak value has to be taken instead.

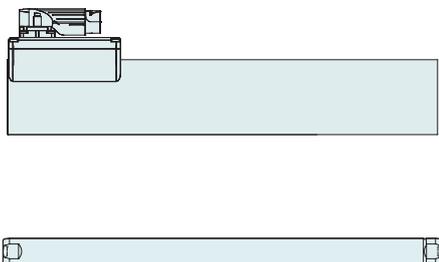

Item	Description	Item-No.
<b>PS10-54x240U-BL-TU</b>	Stator 3x400VAC, LinMot Encoder	<a href="#">0150-2724</a>
<b>PS10-54x240U-BL-TU-D04</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	<a href="#">0150-4410</a>
<b>PS10-54x240U-BL-TU-D05</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	<a href="#">0150-4593</a>
<b>PS10-54x240U-BL-TU-D24</b>	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	<a href="#">0150-2750</a>
<b>PS10-54x240U-BL-TU-D24S</b>	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	<a href="#">0150-4050</a>
<b>PS10-54x240U-BL-TU-D25</b>	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	<a href="#">0150-2754</a>
<b>PS10-54x240U-BL-TU-D25S</b>	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	<a href="#">0150-2784</a>
<b>PS10-54x240U-BL-TU-D26</b>	Stator 3x400VAC, A/B Encoder, PTC single ended	<a href="#">0150-2957</a>
<b>PS10-54x240U-BL-TU-D34</b>	Stator 3x400VAC, BiSS-C Encoder, Pt1000 dual	<a href="#">0150-5772</a>
<b>PL01-28x710/630</b>	Slider 'standard'	<a href="#">0150-1384</a>

**P10-54x240U/400-BL-TU**


**Max. Stroke:** 400 mm  
**Peak Force:** 669 N

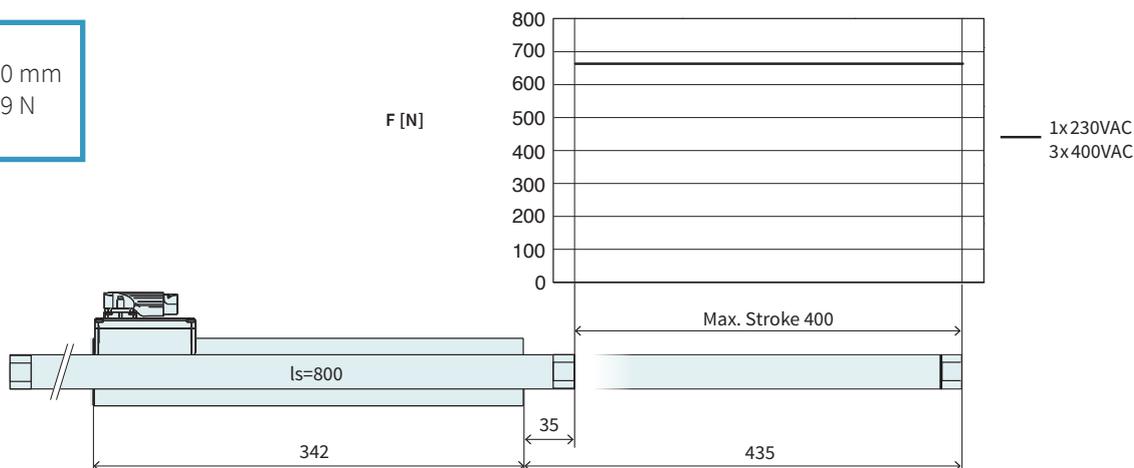

Dimensions in mm

Technical Data P10-54x240U/400			
<b>Stroke</b>			
Max. Stroke	mm (in)	400	(15.69)
<b>Force</b>			
Max. Force <sup>1</sup> @ 1x230VAC	N (lbf)	669	(150)
Max. Force <sup>1</sup> @ 3x400VAC	N (lbf)	669	(150)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N (lbf)	110 / 150 / 210	(25 / 34 / 48)
Max. Border Force relative	%	100	
Force Constant 1	N/A <sub>pk</sub> (lbf/A <sub>pk</sub> )	44	(9.89)
Force Constant 2	N/A <sub>rms</sub> (lbf/A <sub>rms</sub> )	62.2	(14)
<b>Velocity</b>			
Max. Velocity @ 1x230VAC	m/s (in/s)	4.1	(159.9)
Max. Velocity @ 3x400VAC	m/s (in/s)	7.1	(7.1)
<b>Position Detection</b>			
Repeatability	mm (in)	±0.05	(±0.002)
Linearity	%	±0.3	
<b>Electrical Data</b>			
Max. Current <sup>1</sup> @ 1x230VAC	A <sub>pk</sub> / A <sub>rms</sub>	15.1 / 10.6	
Max. Current <sup>1</sup> @ 3x400VAC	A <sub>pk</sub> / A <sub>rms</sub>	15.1 / 10.6	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A <sub>pk</sub>	2.5 / 3.5 / 4.9	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A <sub>rms</sub>	1.8 / 2.4 / 3.4	
<b>Thermal Data</b>			
Max. Winding Temperature (Sensor)	°C	90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W	1.3 / 0.65 / 0.33	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s	1300 / 650 / 330	
<b>Mechanical Data</b>			
Slider Length	mm (in)	800	(31)
Slider Mass	g (lb)	3560	(7.83)


1) Real time calculation of motor winding temperature is required (including monitoring).  
 If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 70 % of the peak value has to be taken instead.

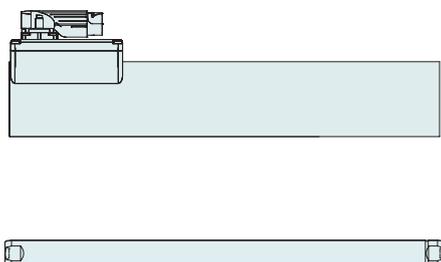

Item	Description	Item-No.
<b>PS10-54x240U-BL-TU</b>	Stator 3x400VAC, LinMot Encoder	<a href="#">0150-2724</a>
<b>PS10-54x240U-BL-TU-D04</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	<a href="#">0150-4410</a>
<b>PS10-54x240U-BL-TU-D05</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	<a href="#">0150-4593</a>
<b>PS10-54x240U-BL-TU-D24</b>	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	<a href="#">0150-2750</a>
<b>PS10-54x240U-BL-TU-D24S</b>	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	<a href="#">0150-4050</a>
<b>PS10-54x240U-BL-TU-D25</b>	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	<a href="#">0150-2754</a>
<b>PS10-54x240U-BL-TU-D25S</b>	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	<a href="#">0150-2784</a>
<b>PS10-54x240U-BL-TU-D26</b>	Stator 3x400VAC, A/B Encoder, PTC single ended	<a href="#">0150-2957</a>
<b>PS10-54x240U-BL-TU-D34</b>	Stator 3x400VAC, BiSS-C Encoder, Pt1000 dual	<a href="#">0150-5772</a>
<b>PL01-28x800/720</b>	Slider 'standard'	<a href="#">0150-1385</a>

**P10-54x240U/520-BL-TU**


**Max. Stroke:** 520 mm  
**Peak Force:** 669 N

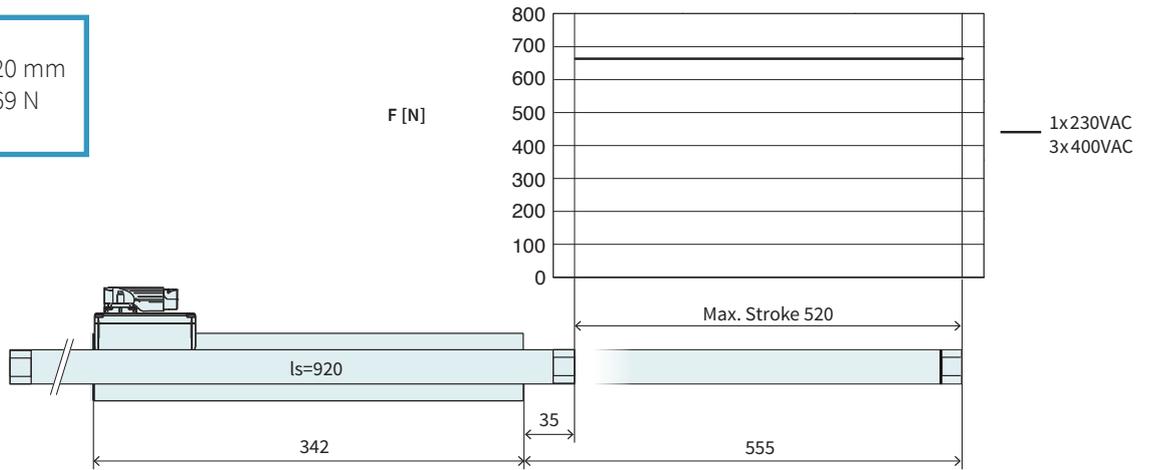

Dimensions in mm

Technical Data P10-54x240U/520				
<b>Stroke</b>				
Max. Stroke	mm	(in)	520	(20.49)
<b>Force</b>				
Max. Force <sup>1</sup> @ 1x230VAC	N	(lbf)	669	(150)
Max. Force <sup>1</sup> @ 3x400VAC	N	(lbf)	669	(150)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N	(lbf)	110 / 150 / 210	(25 / 34 / 48)
Max. Border Force relative	%		100	
Force Constant 1	N/A <sub>pk</sub>	(lbf/A <sub>pk</sub> )	44	(9.89)
Force Constant 2	N/A <sub>rms</sub>	(lbf/A <sub>rms</sub> )	62.2	(14)
<b>Velocity</b>				
Max. Velocity @ 1x230VAC	m/s	(in/s)	4.1	(159.9)
Max. Velocity @ 3x400VAC	m/s	(in/s)	7.1	(7.1)
<b>Position Detection</b>				
Repeatability	mm	(in)	±0.05	(±0.002)
Linearity	%		± 0.25	
<b>Electrical Data</b>				
Max. Current <sup>1</sup> @ 1x230VAC	A <sub>pk</sub> / A <sub>rms</sub>		15.1 / 10.6	
Max. Current <sup>1</sup> @ 3x400VAC	A <sub>pk</sub> / A <sub>rms</sub>		15.1 / 10.6	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A <sub>pk</sub>		2.5 / 3.5 / 4.9	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A <sub>rms</sub>		1.8 / 2.4 / 3.4	
<b>Thermal Data</b>				
Max. Winding Temperature (Sensor)	°C		90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W		1.3 / 0.65 / 0.33	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s		1300 / 650 / 330	
<b>Mechanical Data</b>				
Slider Length	mm	(in)	920	(36)
Slider Mass	g	(lb)	4120	(9.06)


1) Real time calculation of motor winding temperature is required (including monitoring).  
 If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 70 % of the peak value has to be taken instead.

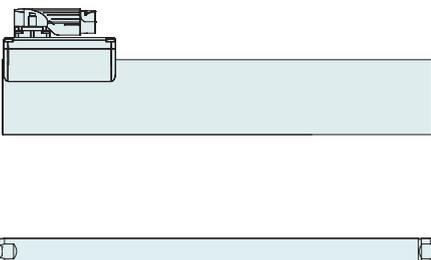

Item	Description	Item-No.
<b>PS10-54x240U-BL-TU</b>	Stator 3x400VAC, LinMot Encoder	<a href="#">0150-2724</a>
<b>PS10-54x240U-BL-TU-D04</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	<a href="#">0150-4410</a>
<b>PS10-54x240U-BL-TU-D05</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	<a href="#">0150-4593</a>
<b>PS10-54x240U-BL-TU-D24</b>	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	<a href="#">0150-2750</a>
<b>PS10-54x240U-BL-TU-D24S</b>	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	<a href="#">0150-4050</a>
<b>PS10-54x240U-BL-TU-D25</b>	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	<a href="#">0150-2754</a>
<b>PS10-54x240U-BL-TU-D25S</b>	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	<a href="#">0150-2784</a>
<b>PS10-54x240U-BL-TU-D26</b>	Stator 3x400VAC, A/B Encoder, PTC single ended	<a href="#">0150-2957</a>
<b>PS10-54x240U-BL-TU-D34</b>	Stator 3x400VAC, BiSS-C Encoder, Pt1000 dual	<a href="#">0150-5772</a>
<b>PL01-28x920/840</b>	Slider 'standard'	<a href="#">0150-1386</a>

**P10-54x240U/610-BL-TU**

**Max. Stroke:** 610 mm  
**Peak Force:** 669 N

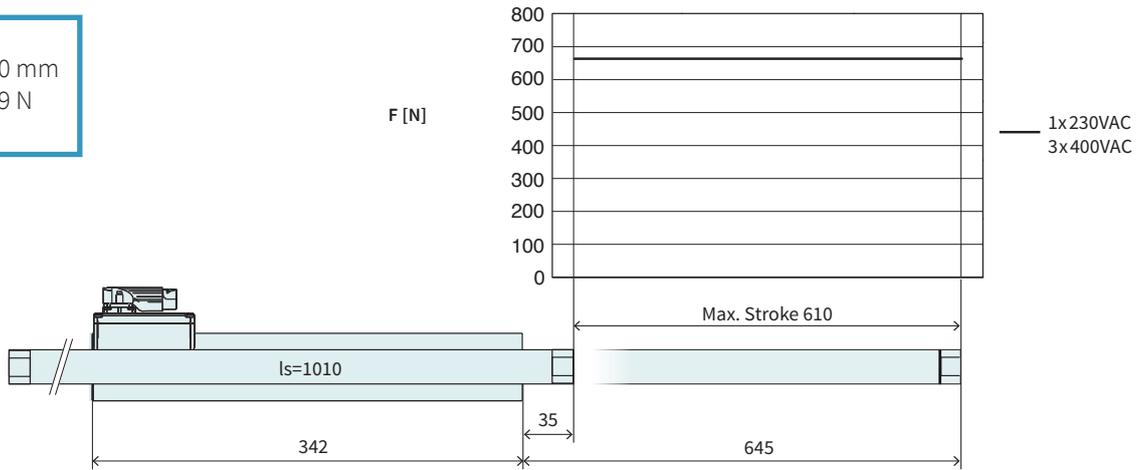

Dimensions in mm

**Technical Data P10-54x240U/610**

Stroke			
Max. Stroke	mm (in)		610 (23.99)
Force			
Max. Force <sup>1</sup> @ 1x230VAC	N (lbf)		669 (150)
Max. Force <sup>1</sup> @ 3x400VAC	N (lbf)		669 (150)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N (lbf)		110 / 150 / 210 (25 / 34 / 48)
Max. Border Force relative	%		100
Force Constant 1	N/A <sub>pk</sub> (lbf/A <sub>pk</sub> )		44 (9.89)
Force Constant 2	N/A <sub>rms</sub> (lbf/A <sub>rms</sub> )		62.2 (14)
Velocity			
Max. Velocity @ 1x230VAC	m/s (in/s)		4.1 (159.9)
Max. Velocity @ 3x400VAC	m/s (in/s)		7.1 (7.1)
Position Detection			
Repeatability	mm (in)		±0.05 (±0.002)
Linearity	%		± 0.2
Electrical Data			
Max. Current <sup>1</sup> @ 1x230VAC	A <sub>pk</sub> / A <sub>rms</sub>		15.1 / 10.6
Max. Current <sup>1</sup> @ 3x400VAC	A <sub>pk</sub> / A <sub>rms</sub>		15.1 / 10.6
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A <sub>pk</sub>		2.5 / 3.5 / 4.9
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A <sub>rms</sub>		1.8 / 2.4 / 3.4
Thermal Data			
Max. Winding Temperature (Sensor)	°C		90
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W		1.3 / 0.65 / 0.33
Thermal Time Constant [Passive cooling / Fan / Fluid]	s		1300 / 650 / 330
Mechanical Data			
Slider Length	mm (in)		1010 (40)
Slider Mass	g (lb)		4540 (10)

1) Real time calculation of motor winding temperature is required (including monitoring).


If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 70 % of the peak value has to be taken instead.



Item	Description	Item-No.
<b>PS10-54x240U-BL-TU</b>	Stator 3x400VAC, LinMot Encoder	<a href="#">0150-2724</a>
<b>PS10-54x240U-BL-TU-D04</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	<a href="#">0150-4410</a>
<b>PS10-54x240U-BL-TU-D05</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	<a href="#">0150-4593</a>
<b>PS10-54x240U-BL-TU-D24</b>	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	<a href="#">0150-2750</a>
<b>PS10-54x240U-BL-TU-D24S</b>	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	<a href="#">0150-4050</a>
<b>PS10-54x240U-BL-TU-D25</b>	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	<a href="#">0150-2754</a>
<b>PS10-54x240U-BL-TU-D25S</b>	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	<a href="#">0150-2784</a>
<b>PS10-54x240U-BL-TU-D26</b>	Stator 3x400VAC, A/B Encoder, PTC single ended	<a href="#">0150-2957</a>
<b>PS10-54x240U-BL-TU-D34</b>	Stator 3x400VAC, BiSS-C Encoder, Pt1000 dual	<a href="#">0150-5772</a>
<b>PL01-28x1010/930</b>	Slider 'standard'	<a href="#">0150-1387</a>

**P10-54x240U/820-BL-TU**


**Max. Stroke:** 820 mm  
**Peak Force:** 669 N

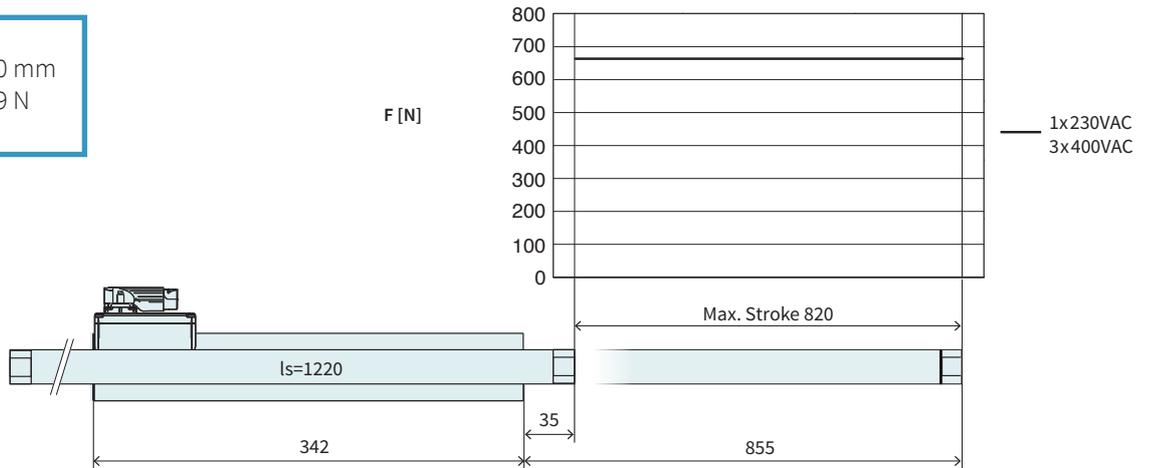

Dimensions in mm

Technical Data P10-54x240U/820				
<b>Stroke</b>				
Max. Stroke	mm	(in)	820	(32.29)
<b>Force</b>				
Max. Force <sup>1</sup> @ 1x230VAC	N	(lbf)	669	(150)
Max. Force <sup>1</sup> @ 3x400VAC	N	(lbf)	669	(150)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N	(lbf)	110 / 150 / 210	(25 / 34 / 48)
Max. Border Force relative	%		100	
Force Constant 1	N/A <sub>pk</sub>	(lbf/A <sub>pk</sub> )	44	(9.89)
Force Constant 2	N/A <sub>rms</sub>	(lbf/A <sub>rms</sub> )	62.2	(14)
<b>Velocity</b>				
Max. Velocity @ 1x230VAC	m/s	(in/s)	4.1	(159.9)
Max. Velocity @ 3x400VAC	m/s	(in/s)	7.1	(7.1)
<b>Position Detection</b>				
Repeatability	mm	(in)	±0.05	(±0.002)
Linearity	%		± 0.2	
<b>Electrical Data</b>				
Max. Current <sup>1</sup> @ 1x230VAC	A <sub>pk</sub> / A <sub>rms</sub>		15.1 / 10.6	
Max. Current <sup>1</sup> @ 3x400VAC	A <sub>pk</sub> / A <sub>rms</sub>		15.1 / 10.6	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A <sub>pk</sub>		2.5 / 3.5 / 4.9	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A <sub>rms</sub>		1.8 / 2.4 / 3.4	
<b>Thermal Data</b>				
Max. Winding Temperature (Sensor)	°C		90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W		1.3 / 0.65 / 0.33	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s		1300 / 650 / 330	
<b>Mechanical Data</b>				
Slider Length	mm	(in)	1220	(48)
Slider Mass	g	(lb)	5510	(12.12)


1) Real time calculation of motor winding temperature is required (including monitoring).  
 If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 70 % of the peak value has to be taken instead.

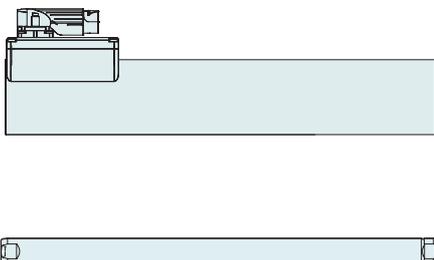

Item	Description	Item-No.
<b>PS10-54x240U-BL-TU</b>	Stator 3x400VAC, LinMot Encoder	<a href="#">0150-2724</a>
<b>PS10-54x240U-BL-TU-D04</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	<a href="#">0150-4410</a>
<b>PS10-54x240U-BL-TU-D05</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	<a href="#">0150-4593</a>
<b>PS10-54x240U-BL-TU-D24</b>	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	<a href="#">0150-2750</a>
<b>PS10-54x240U-BL-TU-D24S</b>	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	<a href="#">0150-4050</a>
<b>PS10-54x240U-BL-TU-D25</b>	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	<a href="#">0150-2754</a>
<b>PS10-54x240U-BL-TU-D25S</b>	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	<a href="#">0150-2784</a>
<b>PS10-54x240U-BL-TU-D26</b>	Stator 3x400VAC, A/B Encoder, PTC single ended	<a href="#">0150-2957</a>
<b>PS10-54x240U-BL-TU-D34</b>	Stator 3x400VAC, BiSS-C Encoder, Pt1000 dual	<a href="#">0150-5772</a>
<b>PL01-28x1220/1140</b>	Slider 'standard'	<a href="#">0150-1388</a>

**P10-54x240U/1000-BL-TU**


**Max. Stroke:** 1000 mm  
**Peak Force:** 669 N

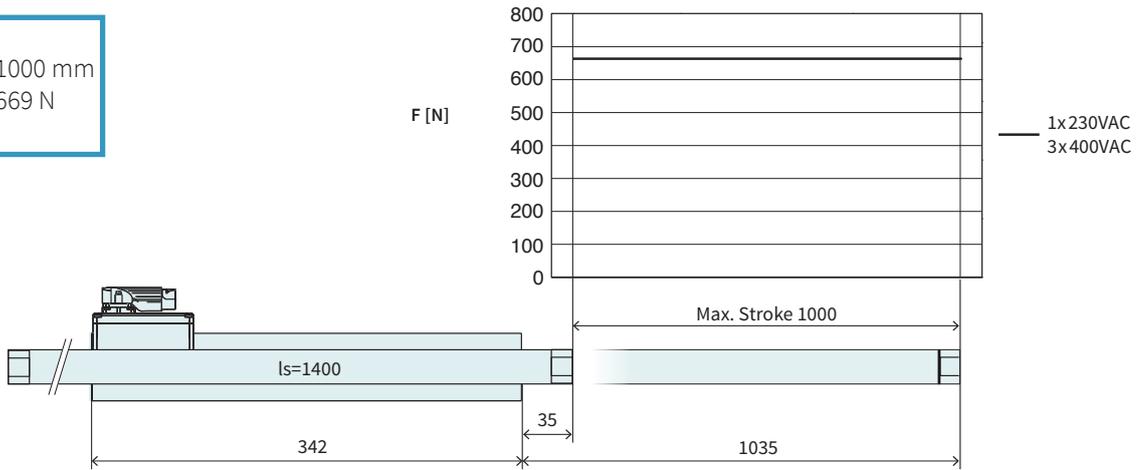

Dimensions in mm

Technical Data P10-54x240U/1000			
<b>Stroke</b>			
Max. Stroke	mm (in)	1000	(39.39)
<b>Force</b>			
Max. Force <sup>1</sup> @ 1x230VAC	N (lbf)	669	(150)
Max. Force <sup>1</sup> @ 3x400VAC	N (lbf)	669	(150)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N (lbf)	110 / 150 / 210	(25 / 34 / 48)
Max. Border Force relative	%	100	
Force Constant 1	N/A <sub>pk</sub> (lbf/A <sub>pk</sub> )	44	(9.89)
Force Constant 2	N/A <sub>rms</sub> (lbf/A <sub>rms</sub> )	62.2	(14)
<b>Velocity</b>			
Max. Velocity @ 1x230VAC	m/s (in/s)	4.1	(159.9)
Max. Velocity @ 3x400VAC	m/s (in/s)	7.1	(7.1)
<b>Position Detection</b>			
Repeatability	mm (in)	±0.05	(±0.002)
Linearity	%	±0.2	
<b>Electrical Data</b>			
Max. Current <sup>1</sup> @ 1x230VAC	A <sub>pk</sub> / A <sub>rms</sub>	15.1 / 10.6	
Max. Current <sup>1</sup> @ 3x400VAC	A <sub>pk</sub> / A <sub>rms</sub>	15.1 / 10.6	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A <sub>pk</sub>	2.5 / 3.5 / 4.9	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A <sub>rms</sub>	1.8 / 2.4 / 3.4	
<b>Thermal Data</b>			
Max. Winding Temperature (Sensor)	°C	90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W	1.3 / 0.65 / 0.33	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s	1300 / 650 / 330	
<b>Mechanical Data</b>			
Slider Length	mm (in)	1400	(55)
Slider Mass	g (lb)	6350	(13.97)


1) Real time calculation of motor winding temperature is required (including monitoring).  
 If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 70 % of the peak value has to be taken instead.

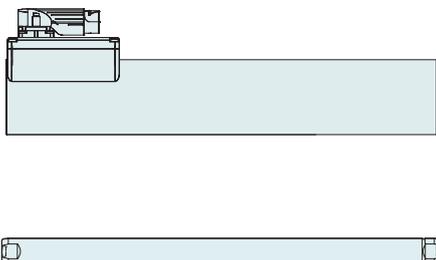

Item	Description	Item-No.
<b>PS10-54x240U-BL-TU</b>	Stator 3x400VAC, LinMot Encoder	<a href="#">0150-2724</a>
<b>PS10-54x240U-BL-TU-D04</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	<a href="#">0150-4410</a>
<b>PS10-54x240U-BL-TU-D05</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	<a href="#">0150-4593</a>
<b>PS10-54x240U-BL-TU-D24</b>	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	<a href="#">0150-2750</a>
<b>PS10-54x240U-BL-TU-D24S</b>	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	<a href="#">0150-4050</a>
<b>PS10-54x240U-BL-TU-D25</b>	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	<a href="#">0150-2754</a>
<b>PS10-54x240U-BL-TU-D25S</b>	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	<a href="#">0150-2784</a>
<b>PS10-54x240U-BL-TU-D26</b>	Stator 3x400VAC, A/B Encoder, PTC single ended	<a href="#">0150-2957</a>
<b>PS10-54x240U-BL-TU-D34</b>	Stator 3x400VAC, BiSS-C Encoder, Pt1000 dual	<a href="#">0150-5772</a>
<b>PL01-28x1400/1320</b>	Slider 'standard'	<a href="#">0150-1389</a>

**P10-54x240U/1210-BL-TU**


**Max. Stroke:** 1210 mm  
**Peak Force:** 669 N

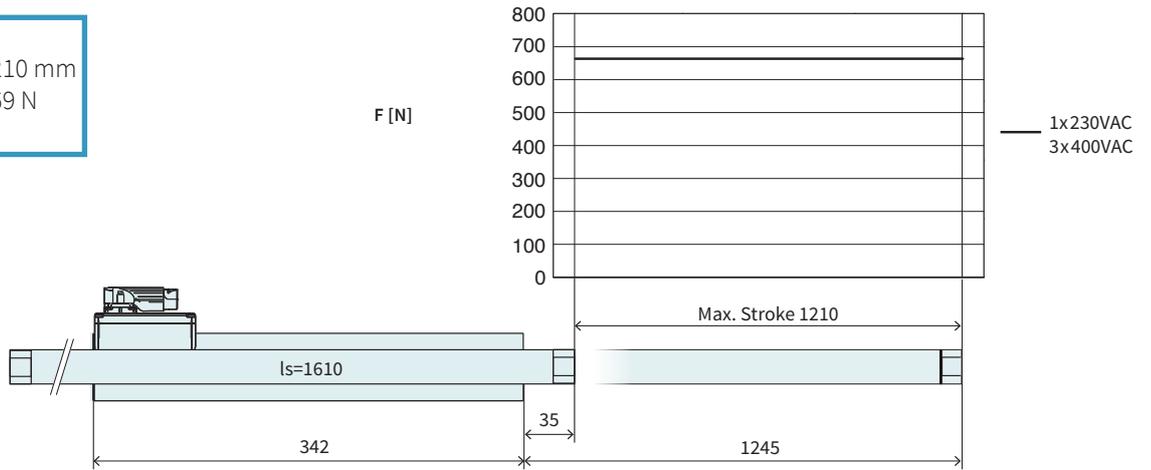

Dimensions in mm

Technical Data P10-54x240U/1210				
<b>Stroke</b>				
Max. Stroke	mm	(in)	1210	(47.6)
<b>Force</b>				
Max. Force <sup>1</sup> @ 1x230VAC	N	(lbf)	669	(150)
Max. Force <sup>1</sup> @ 3x400VAC	N	(lbf)	669	(150)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N	(lbf)	110 / 150 / 210	(25 / 34 / 48)
Max. Border Force relative	%		100	
Force Constant 1	N/A <sub>pk</sub>	(lbf/A <sub>pk</sub> )	44	(9.89)
Force Constant 2	N/A <sub>rms</sub>	(lbf/A <sub>rms</sub> )	62.2	(14)
<b>Velocity</b>				
Max. Velocity @ 1x230VAC	m/s	(in/s)	4.1	(159.9)
Max. Velocity @ 3x400VAC	m/s	(in/s)	7.1	(7.1)
<b>Position Detection</b>				
Repeatability	mm	(in)	±0.05	(±0.002)
Linearity	%		±0.15	
<b>Electrical Data</b>				
Max. Current <sup>1</sup> @ 1x230VAC	A <sub>pk</sub> / A <sub>rms</sub>		15.1 / 10.6	
Max. Current <sup>1</sup> @ 3x400VAC	A <sub>pk</sub> / A <sub>rms</sub>		15.1 / 10.6	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A <sub>pk</sub>		2.5 / 3.5 / 4.9	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A <sub>rms</sub>		1.8 / 2.4 / 3.4	
<b>Thermal Data</b>				
Max. Winding Temperature (Sensor)	°C		90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W		1.3 / 0.65 / 0.33	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s		1300 / 650 / 330	
<b>Mechanical Data</b>				
Slider Length	mm	(in)	1610	(63)
Slider Mass	g	(lb)	7330	(16.13)


1) Real time calculation of motor winding temperature is required (including monitoring).  
 If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 70 % of the peak value has to be taken instead.

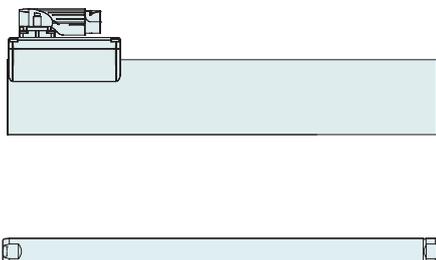

Item	Description	Item-No.
<b>PS10-54x240U-BL-TU</b>	Stator 3x400VAC, LinMot Encoder	<a href="#">0150-2724</a>
<b>PS10-54x240U-BL-TU-D04</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	<a href="#">0150-4410</a>
<b>PS10-54x240U-BL-TU-D05</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	<a href="#">0150-4593</a>
<b>PS10-54x240U-BL-TU-D24</b>	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	<a href="#">0150-2750</a>
<b>PS10-54x240U-BL-TU-D24S</b>	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	<a href="#">0150-4050</a>
<b>PS10-54x240U-BL-TU-D25</b>	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	<a href="#">0150-2754</a>
<b>PS10-54x240U-BL-TU-D25S</b>	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	<a href="#">0150-2784</a>
<b>PS10-54x240U-BL-TU-D26</b>	Stator 3x400VAC, A/B Encoder, PTC single ended	<a href="#">0150-2957</a>
<b>PS10-54x240U-BL-TU-D34</b>	Stator 3x400VAC, BiSS-C Encoder, Pt1000 dual	<a href="#">0150-5772</a>
<b>PL01-28x1610/1530</b>	Slider 'standard'	<a href="#">0150-1390</a>

**P10-54x240U/1420-BL-TU**


**Max. Stroke:** 1420 mm  
**Peak Force:** 669 N

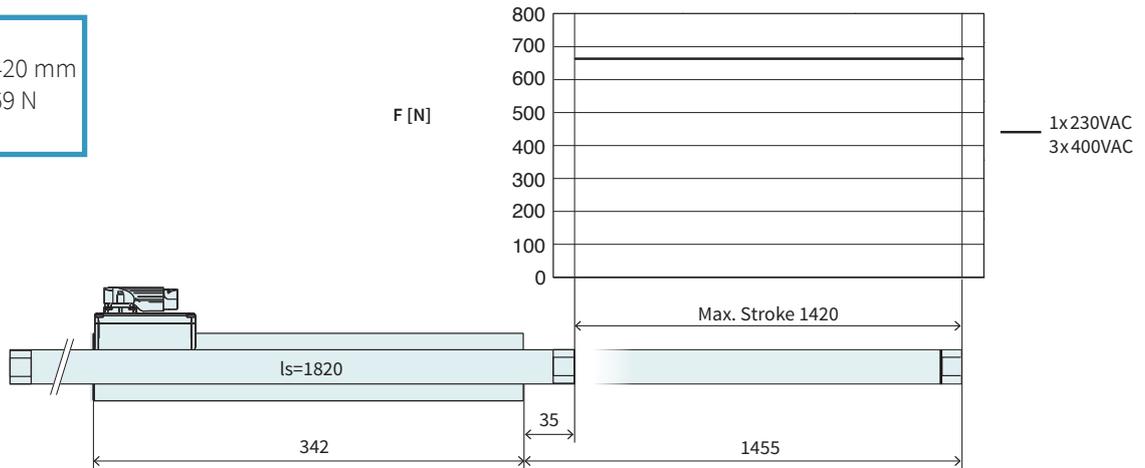

Dimensions in mm

Technical Data P10-54x240U/1420			
<b>Stroke</b>			
Max. Stroke	mm (in)	1420	(55.89)
<b>Force</b>			
Max. Force <sup>1</sup> @ 1x230VAC	N (lbf)	669	(150)
Max. Force <sup>1</sup> @ 3x400VAC	N (lbf)	669	(150)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N (lbf)	110 / 150 / 210	(25 / 34 / 48)
Max. Border Force relative	%	100	
Force Constant 1	N/A <sub>pk</sub> (lbf/A <sub>pk</sub> )	44	(9.89)
Force Constant 2	N/A <sub>rms</sub> (lbf/A <sub>rms</sub> )	62.2	(14)
<b>Velocity</b>			
Max. Velocity @ 1x230VAC	m/s (in/s)	4.1	(159.9)
Max. Velocity @ 3x400VAC	m/s (in/s)	7.1	(7.1)
<b>Position Detection</b>			
Repeatability	mm (in)	±0.05	(±0.002)
Linearity	%	±0.15	
<b>Electrical Data</b>			
Max. Current <sup>1</sup> @ 1x230VAC	A <sub>pk</sub> / A <sub>rms</sub>	15.1 / 10.6	
Max. Current <sup>1</sup> @ 3x400VAC	A <sub>pk</sub> / A <sub>rms</sub>	15.1 / 10.6	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A <sub>pk</sub>	2.5 / 3.5 / 4.9	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A <sub>rms</sub>	1.8 / 2.4 / 3.4	
<b>Thermal Data</b>			
Max. Winding Temperature (Sensor)	°C	90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W	1.3 / 0.65 / 0.33	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s	1300 / 650 / 330	
<b>Mechanical Data</b>			
Slider Length	mm (in)	1820	(72)
Slider Mass	g (lb)	8300	(18.26)


1) Real time calculation of motor winding temperature is required (including monitoring).  
 If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 70 % of the peak value has to be taken instead.

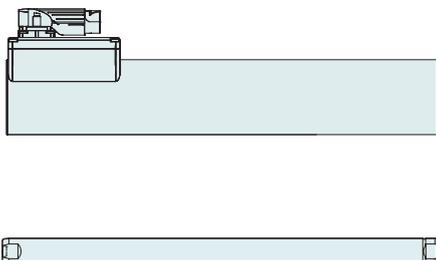

Item	Description	Item-No.
<b>PS10-54x240U-BL-TU</b>	Stator 3x400VAC, LinMot Encoder	<a href="#">0150-2724</a>
<b>PS10-54x240U-BL-TU-D04</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	<a href="#">0150-4410</a>
<b>PS10-54x240U-BL-TU-D05</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	<a href="#">0150-4593</a>
<b>PS10-54x240U-BL-TU-D24</b>	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	<a href="#">0150-2750</a>
<b>PS10-54x240U-BL-TU-D24S</b>	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	<a href="#">0150-4050</a>
<b>PS10-54x240U-BL-TU-D25</b>	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	<a href="#">0150-2754</a>
<b>PS10-54x240U-BL-TU-D25S</b>	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	<a href="#">0150-2784</a>
<b>PS10-54x240U-BL-TU-D26</b>	Stator 3x400VAC, A/B Encoder, PTC single ended	<a href="#">0150-2957</a>
<b>PS10-54x240U-BL-TU-D34</b>	Stator 3x400VAC, BiSS-C Encoder, Pt1000 dual	<a href="#">0150-5772</a>
<b>PL01-28x1820/1740</b>	Slider 'standard'	<a href="#">0150-1395</a>

**P10-54x240U/1600-BL-TU**


**Max. Stroke:** 1600 mm  
**Peak Force:** 669 N

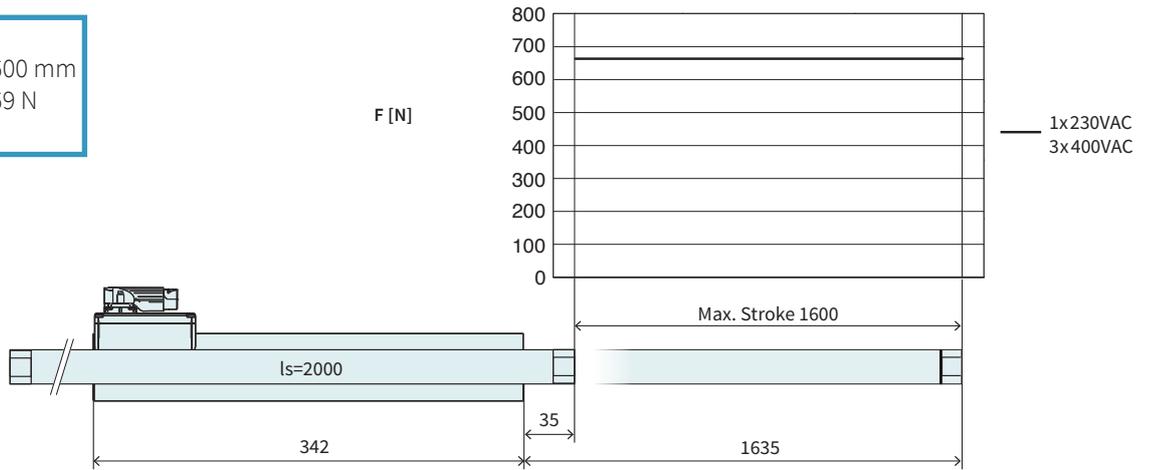

Dimensions in mm

Technical Data P10-54x240U/1600			
<b>Stroke</b>			
Max. Stroke	mm (in)	1600	(62.99)
<b>Force</b>			
Max. Force <sup>1</sup> @ 1x230VAC	N (lbf)	669	(150)
Max. Force <sup>1</sup> @ 3x400VAC	N (lbf)	669	(150)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N (lbf)	110 / 150 / 210	(25 / 34 / 48)
Max. Border Force relative	%	100	
Force Constant 1	N/A <sub>pk</sub> (lbf/A <sub>pk</sub> )	44	(9.89)
Force Constant 2	N/A <sub>rms</sub> (lbf/A <sub>rms</sub> )	62.2	(14)
<b>Velocity</b>			
Max. Velocity @ 1x230VAC	m/s (in/s)	4.1	(159.9)
Max. Velocity @ 3x400VAC	m/s (in/s)	7.1	(7.1)
<b>Position Detection</b>			
Repeatability	mm (in)	±0.05	(±0.002)
Linearity	%	±0.15	
<b>Electrical Data</b>			
Max. Current <sup>1</sup> @ 1x230VAC	A <sub>pk</sub> / A <sub>rms</sub>	15.1 / 10.6	
Max. Current <sup>1</sup> @ 3x400VAC	A <sub>pk</sub> / A <sub>rms</sub>	15.1 / 10.6	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A <sub>pk</sub>	2.5 / 3.5 / 4.9	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A <sub>rms</sub>	1.8 / 2.4 / 3.4	
<b>Thermal Data</b>			
Max. Winding Temperature (Sensor)	°C	90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W	1.3 / 0.65 / 0.33	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s	1300 / 650 / 330	
<b>Mechanical Data</b>			
Slider Length	mm (in)	2000	(79)
Slider Mass	g (lb)	9140	(20.11)

1) Real time calculation of motor winding temperature is required (including monitoring).  
 If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 70 % of the peak value has to be taken instead.

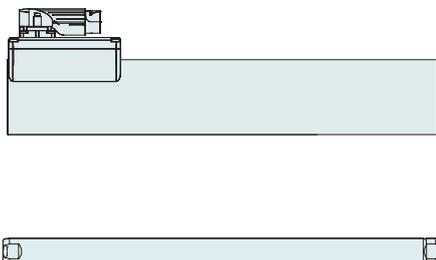

Item	Description	Item-No.
<b>PS10-54x240U-BL-TU</b>	Stator 3x400VAC, LinMot Encoder	<a href="#">0150-2724</a>
<b>PS10-54x240U-BL-TU-D04</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	<a href="#">0150-4410</a>
<b>PS10-54x240U-BL-TU-D05</b>	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	<a href="#">0150-4593</a>
<b>PS10-54x240U-BL-TU-D24</b>	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	<a href="#">0150-2750</a>
<b>PS10-54x240U-BL-TU-D24S</b>	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	<a href="#">0150-4050</a>
<b>PS10-54x240U-BL-TU-D25</b>	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	<a href="#">0150-2754</a>
<b>PS10-54x240U-BL-TU-D25S</b>	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	<a href="#">0150-2784</a>
<b>PS10-54x240U-BL-TU-D26</b>	Stator 3x400VAC, A/B Encoder, PTC single ended	<a href="#">0150-2957</a>
<b>PS10-54x240U-BL-TU-D34</b>	Stator 3x400VAC, BiSS-C Encoder, Pt1000 dual	<a href="#">0150-5772</a>
<b>PL01-28x2000/1920</b>	Slider 'standard'	<a href="#">0150-1396</a>

**Motor Cables for LinMot Drives**

4



**C1400**




**E1400**

**B** Connector MC10-B/m

**Tk** Connector MC10-Tk/f



Power Trailing Chain Cable KPS



Encoder Trailing Chain Cable KSS




**P10-54x240U**

**D15s** Connector MC01-D15s-45°/f


**Uk** Connector MC10-Uk/f

**L** Connector MC10-L/m

**Tk** Connector MC10-Tk/f

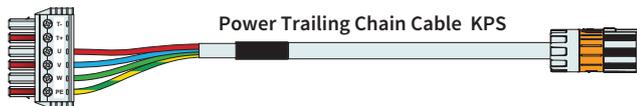

Power Trailing Chain Cable KPS



Encoder Trailing Chain Cable KSS



**P10-54x240U**


**D15s** Connector MC01-D15s-45°/f

**Uk** Connector MC10-Uk/f


## ORDERING INFORMATION

POWER CABLES		
Item	Description	Item-No.
<b>KPS07-04/02-B/Tk-3</b>	Power Trailing Chain Cable C1400/P10-54, 3 m	<a href="#">0150-3648</a>
<b>KPS07-04/02-B/Tk-5</b>	Power Trailing Chain Cable C1400/P10-54, 5 m	<a href="#">0150-3657</a>
<b>KPS07-04/02-B/Tk-8</b>	Power Trailing Chain Cable C1400/P10-54, 8 m	<a href="#">0150-3658</a>
<b>KPS07-04/02-B/Tk-12</b>	Power Trailing Chain Cable C1400/P10-54, 12 m	<a href="#">0150-3659</a>
<b>KPS07-04/02-B/Tk-</b>	Power Trailing Chain Cable B/Tk-, Custom length	<a href="#">0150-4770</a>
<b>KPS07-04/02-L/Tk-3</b>	Power Trailing Chain Cable E1400/P10-54, 3 m	<a href="#">0150-2670</a>
<b>KPS07-04/02-L/Tk-5</b>	Power Trailing Chain Cable E1400/P10-54, 5 m	<a href="#">0150-2671</a>
<b>KPS07-04/02-L/Tk-8</b>	Power Trailing Chain Cable E1400/P10-54, 8 m	<a href="#">0150-2672</a>
<b>KPS07-04/02-L/Tk-12</b>	Power Trailing Chain Cable E1400/P10-54, 12 m	<a href="#">0150-2673</a>
<b>KPS07-04/02-L/Tk-</b>	Power Trailing Chain Cable L/Tk-, Custom length	<a href="#">0150-3706</a>
ENCODER CABLES		
Item	Description	Item-No.
<b>KSS05-02/08-D15s/Uk-3</b>	Encoder Trailing Chain Cable D15s/Uk, 3 m	<a href="#">0150-2650</a>
<b>KSS05-02/08-D15s/Uk-5</b>	Encoder Trailing Chain Cable D15s/Uk, 5 m	<a href="#">0150-2651</a>
<b>KSS05-02/08-D15s/Uk-8</b>	Encoder Trailing Chain Cable D15s/Uk, 8 m	<a href="#">0150-2652</a>
<b>KSS05-02/08-D15s/Uk-12</b>	Encoder Trailing Chain Cable D15s/Uk, 12 m	<a href="#">0150-2653</a>
<b>KSS05-02/08-D15s(f)-45°/Uk-</b>	Encoder Trailing Chain Cable D15s(f)-45°/Uk-, Custom length	<a href="#">0150-2731</a>
EXTENSION CABLES		
Item	Description	Item-No.
<b>KPS07-04/02-Tk/Tk-</b>	Power Trailing Chain Cable Tk/Tk-, Custom length	<a href="#">0150-2829</a>
<b>KSS05-02/08-Uk/Uk</b>	Encoder Trailing Chain Cable Uk/Uk-, Custom length	<a href="#">0150-2830</a>
CONNECTORS		
Item	Description	Item-No.
<b>MC10-L/m</b>	Connector Power E1400/X2	<a href="#">0150-3382</a>
<b>MC01-D15/f</b>	Motor Connector D15 (f)	<a href="#">0150-3136</a>
<b>MC10-Tk/f</b>	Connector Power PS10-54	<a href="#">0150-3482</a>
<b>MC10-Uk/f</b>	Connector Encoder PS10-54	<a href="#">0150-3483</a>

**Motor Cables for 3rd Party Drives**




Open end



Power Trailing Chain Cable KPS07-04/02


**Tk** Connector MC10-Tk/f

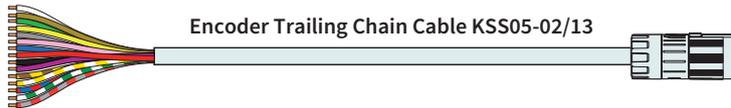

Encoder Trailing Chain Cable KSS05-02/13

**Uk** Connector MC10-Uk/f

Open end

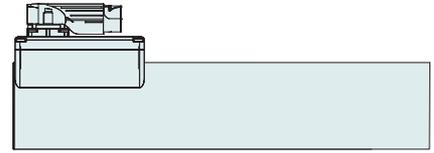

**P10-54x240U**

**3rd party Drive**

**ORDERING INFORMATION**

**POWER CABLES**

Item	Description	Item-No.
<b>KPS07-04/02-./Tk-10</b>	Power Trailing Chain Cable .../Tk, 10m	<a href="#">0150-3626</a>
<b>KPS07-04/02-./Tk-</b>	Power Trailing Chain Cable .../Tk, Custom length	<a href="#">0150-3622</a>
<b>KPS07-04/02</b>	Power Trailing Chain Cable P10-54 (per m)	<a href="#">0150-2372</a>

**ENCODER CABLES**

Item	Description	Item-No.
<b>KSS05-02/13-./Uk-10</b>	Encoder Trailing Chain Cable ./Uk, 10m	<a href="#">0150-3627</a>
<b>KSS05-02/13-./Uk-</b>	Encoder Trailing Chain Cable ./Uk, Custom length	<a href="#">0150-3619</a>
<b>KSS05-02/13</b>	Encoder Trailing Chain Cable P10-...-Dxx (per m)	<a href="#">0150-2259</a>

**EXTENSION CABLES**

Item	Description	Item-No.
<b>KPS07-04/02-Tk/Tk-</b>	Power Trailing Chain Cable Tk/Tk-, Custom length	<a href="#">0150-2829</a>
<b>KSS05-02/08-Uk/Uk</b>	Encoder Trailing Chain Cable Uk/Uk-, Custom length	<a href="#">0150-2830</a>

**CONNECTORS**

Item	Description	Item-No.
<b>MC10-Tk/f</b>	Connector Power PS10-54	<a href="#">0150-3482</a>
<b>MC10-Uk/f</b>	Connector Encoder PS10-54	<a href="#">0150-3483</a>

**MOTOR FLANGES**



Item	Description	Item-No.
<b>PF10-54x260</b>	Flange for PS10-54x240	<a href="#">0150-2735</a>

FIND MORE PRODUCT DETAILS IN THE CHAPTER „ACCESSORIES“.

**FANS**



Item	Description	Item-No.
<b>HV01-37/48</b>	Fan cooling for H01-37/48 & PF02-37/48	<a href="#">0150-5051</a>

FIND MORE PRODUCT DETAILS IN THE CHAPTER „ACCESSORIES“.

**SLIDER MOUNTING**




Item	Description	Item-No.
<b>PLF01-28</b>	Fixed Bearing Set for 27/28 mm sliders	<a href="#">0150-3087</a>
<b>PLF01-28-SS</b>	Fixed Bearing Set for 27/28 mm sliders, stainless steel	<a href="#">0150-3297</a>
<b>PLL01-28</b>	Floating Bearing for 28 mm sliders	<a href="#">0150-3094</a>
<b>PLM01-28-MK</b>	Mounting Kit for 28 mm sliders	<a href="#">0150-3095</a>

FIND MORE PRODUCT DETAILS IN THE CHAPTER „ACCESSORIES“.

**BEARING KIT**

4

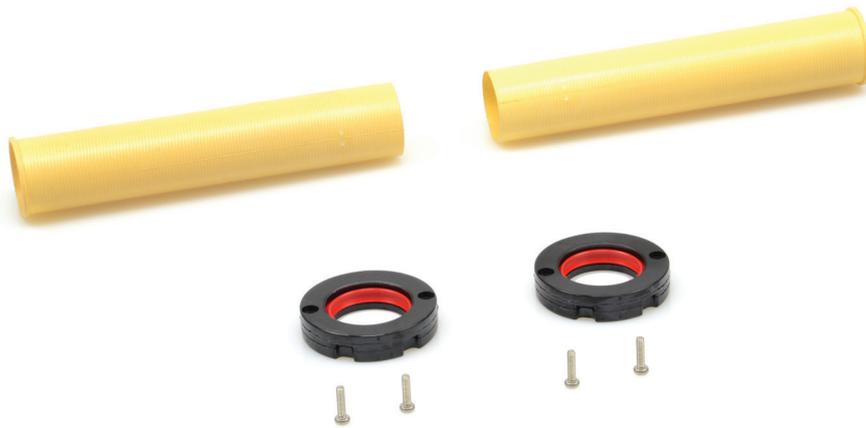

Item	Description	Item-No.
<b>PB10-54x240-L</b>	Bearing Kit for PS10-54x240	<a href="#">0150-3673</a>

FIND MORE PRODUCT DETAILS IN THE CHAPTER „ACCESSORIES“.

**EXTERNAL POSITION SENSORS**



Item	Description	Item-No.
<b>MS01-1/D</b>	Linear Encoder 1µm, A/B (for incremental strip)	<a href="#">0150-1840</a>
<b>MB01-1000</b>	Magnetic incremental strip for MS01-1/D, per cm	<a href="#">0150-1963</a>
<b>KS025-D15/D-Encoder</b>	Encoder Cable (Length in m)	<a href="#">0150-3168</a>

FIND MORE PRODUCT DETAILS IN THE CHAPTER „ACCESSORIES“.



Item	Description	Item-No.
<b>MS01-1/D-SSI</b>	Linear Encoder 1µm, A/B (for absolute strip)	<a href="#">0150-2095</a>
<b>MB01-1000-ABS</b>	Magnetic absolute strip for MS01-1/D-SSI (per cm)	<a href="#">0150-2096</a>
<b>EC01-ABS/ENC-12-S</b>	MS01-1/D-SSI Encoder connector straight	<a href="#">0150-3616</a>
<b>KSS01-12-D15/ABS-ENC</b>	Special cable for MS01-1/D-SSI on C1100/C1200/C1400/E1200/E1400 Drives	<a href="#">0150-3652</a>

FIND MORE PRODUCT DETAILS IN THE CHAPTER „ACCESSORIES“.