


LINEAR MOTORS P10-70X80U

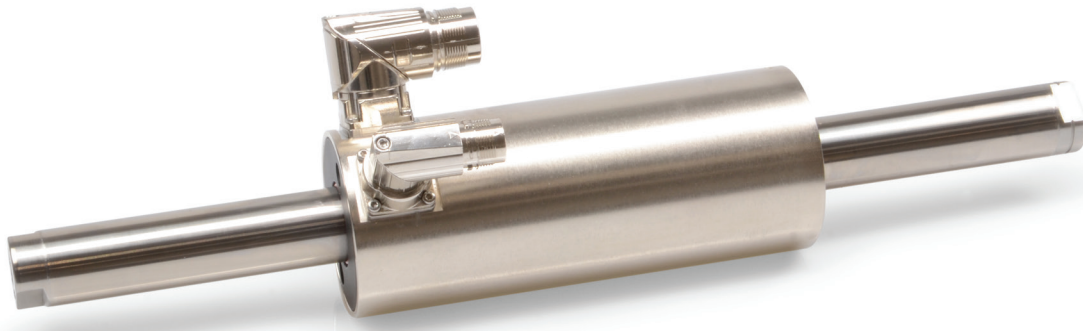

- ✓ 3 x 400VAC technology
- ✓ Peak forces up to 561 N
- ✓ LinMot encoder or 3rd party drive encoder
BiSS-C, SinCos, AB incremental / Pt 1000, KTY, PTC
- ✓ Extremely high dynamic
- ✓ Separate connector for sensor and power cable
- ✓ Can also be controlled by standard third-party servo drives

LINEAR MOTORS P10-70X80U

/ TECHNICAL DATA / 504

/ MOTOR SPECIFICATIONS / 518

 P10-70x80U/70-BL-QJ..... 518

 P10-70x80U/170-BL-QJ..... 519

 P10-70x80U/270-BL-QJ..... 520

 P10-70x80U/370-BL-QJ..... 521

 P10-70x80U/470-BL-QJ..... 522

 P10-70x80U/570-BL-QJ..... 523

 P10-70x80U/670-BL-QJ..... 524

 P10-70x80U/770-BL-QJ..... 525

 P10-70x80U/970-BL-QJ..... 526

 P10-70x80U/1170-BL-QJ..... 527


 P10-70x80U/1370-BL-QJ..... 528

 P10-70x80U/1570-BL-QJ..... 529

 P10-70x80U/1770-BL-QJ..... 530

/ LINEAR GUIDES / 531

/ ACCESSORIES / 533

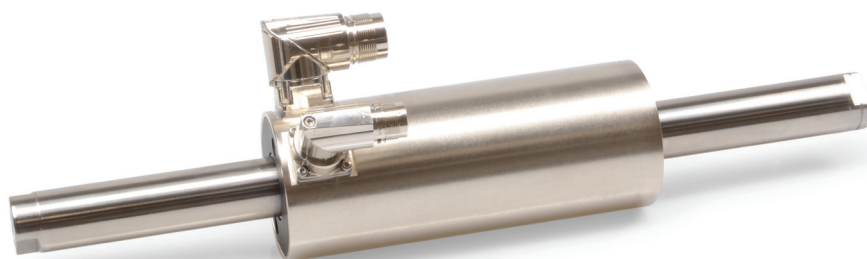

MOTOR FAMILY P10-70x80U


Technical Data

Stroke			
Max. Stroke (ES)	mm (in)	1770	(69.7)
Force			
Max. Force ¹ @ 1x230VAC	N (lbf)	561	(126)
Max. Force ¹ @ 3x400VAC	N (lbf)	561	(126)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N (lbf)	67 / 100 / 180	(15 / 23 / 41)
Max. Border Force relative	%	100	
Force Constant 1	N/A _{pk} (lbf/A _{pk})	51	(11.5)
Force Constant 2	N/A _{rms} (lbf/A _{rms})	72.1	(16.2)
Velocity			
Max. Velocity @ 1x230VAC	m/s (in/s)	3.5	(139.9)
Max. Velocity @ 3x400VAC	m/s (in/s)	6.1	(249.9)
Position Detection			
Position Resolution	mm (in)	0.005	(0.0002)
Repeatability	mm (in)	±0.05	(±0.002)
Position Resolution with ES	mm (in)	0.001	(0.00004)
Repeatability with ES	mm (in)	±0.01	(±0.0004)
Linearity with ES	mm (in)	±0.01	(±0.0004)
Electrical Data			
Max. Current ¹ @ 1x230VAC	A _{pk} / A _{rms}	10.9 / 7.7	
Max. Current ¹ @ 3x400VAC	A _{pk} / A _{rms}	10.9 / 7.7	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A _{pk}	1.3 / 2 / 3.5	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A _{rms}	0.93 / 1.4 / 2.5	
Back EMF Constant	V _{pk} / (m/s) (V _{pk} / (in/s))	58.9	(1.5)
Terminal Resistance 25 °C / 120 °C	Ohm	13 / 18	
Terminal Inductivity	mH	25	
Magnetic Period	mm (in)	40	(1.57)
Thermal Data			
Max. Winding Temperature (Sensor)	°C	90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W	2.6 / 1.1 / 0.36	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s	2100 / 500 / 110	
Mechanical Data			
Stator Diameter	mm (in)	70	(2.8)
Stator Length	mm (in)	180	(7.1)
Stator Mass	g (lb)	2850	(6.27)
Slider Diameter	mm (in)	28	(1.1)
Slider Length	mm (in)	290 - 1990	(11 - 78)
Slider Mass	g (lb)	1360 - 9350	(3 - 20.57)
IP Code		IP 65	
Certification			
UL	File-No.	E354430	

1) Real time calculation of motor winding temperature is required (including monitoring).

If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 60 % of the peak value has to be taken instead.

STATOR

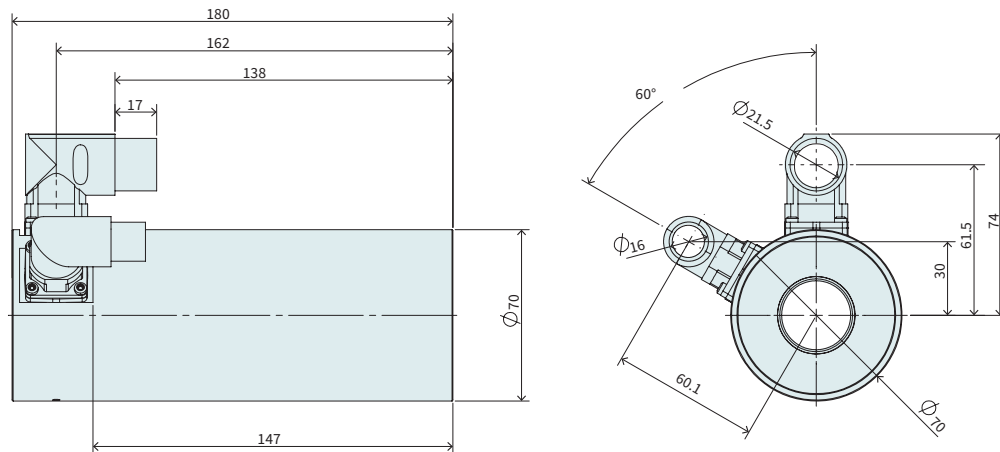

Item	Description	Item-No.	Comment
PS10-70x80U-BL-QJ	Stator 3x400VAC, LinMot Encoder	0150-1291	For use with LinMot Drives
PS10-70x80U-BL-QJ-D04	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	0150-4260	For use with 3rd Party Drives
PS10-70x80U-BL-QJ-D05	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	0150-4605	For use with 3rd Party Drives
PS10-70x80U-BL-QJ-D08	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, KTY dual	0150-4510	For use with 3rd Party Drives
PS10-70x80U-BL-QJ-D24	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	0150-4130	For use with 3rd Party Drives
PS10-70x80U-BL-QJ-D24S	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	0150-4595	For use with 3rd Party Drives
PS10-70x80U-BL-QJ-D25	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	0150-5760	For use with 3rd Party Drives
PS10-70x80U-BL-QJ-D25S	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	0150-4600	For use with 3rd Party Drives
PS10-70x80U-BL-QJ-D26	Stator 3x400VAC, A/B Encoder 1µm, PTC single ended	on request	For use with 3rd Party Drives
PS10-70x80U-BL-QJ-D34	Stator 3x400VAC, BiSS-C, Pt1000 dual	0150-4870	For use with 3rd Party Drives


AVAILABLE INTERFACES FOR 3RD PARTY DRIVES

TEMPERATURE FEEDBACK		POSITION FEEDBACK			
		SinCos, 1Vpp	A/B 1µm	A/B 5µm	BiSS-C
		D0x	D2x	D2xS	D3x
Pt1000, dual*	Dx4	D04	D24	D24S	D34
PTC, dual*	Dx5	D05	D25	D25S	
PTC single ended	Dx6		D26		
KTY, dual*	Dx8	D08			

* Feedback available on encoder and power connectors.


CONNECTOR PS10-70x80U-BL-QJ (INTERFACE FOR LINMOT DRIVES)

Motor Connector Wiring		Connector Encoder J	Wire Color Cable KSS05-02/08
+5VDC*	Supply	1	red
GND	Supply	2	black
Sense +5V*	Supply Sense	3	white
Sense GND*	Supply Sense	4	brown
Mot. Link C+	Communication	5	pink
Mot. Link C-	Communication	6	grey
Sin+	Encoder	7	yellow
Sin-	Encoder	8	orange
Cos+	Encoder	9	green
Cos-	Encoder	10	blue
n. c.	n. c.	11	n. c.
n. c.	n. c.	12	n. c.
n. c.	n. c.	13	n. c.
n. c.	n. c.	14	n. c.
n. c.	n. c.	15	n. c.
n. c.	n. c.	16	n. c.
n. c.	n. c.	17	n. c.




Connector Encoder J

View: Motor connector, plug side

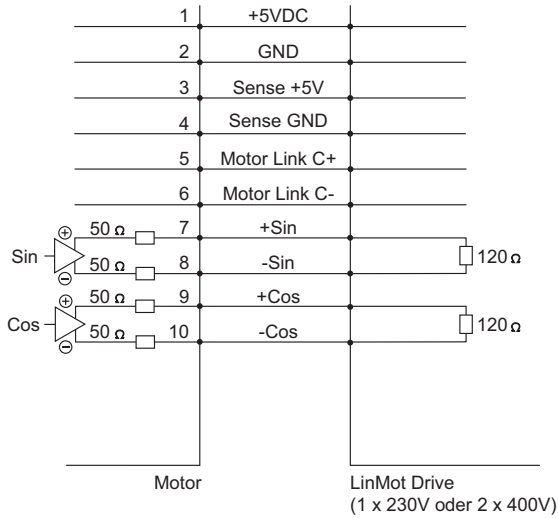


* The supply voltage at 5V sense supply is approx. 6V. Newer motors are provided with a modified power supply, that does not require sense lines any more. In that case, a supply voltage of 6...9V is permitted.

Motor Connector Wiring	Connector Power Q	Wire Color Cable KPS15-04
Phase U	1	red
PE	2	yellow-green
Phase W	3	black (previously: green)
Phase V	4	blue
n. c.	A	n. c.
n. c.	B	n. c.
n. c.	C	n. c.
n. c.	D	n. c.




Connector Power Q

View: Motor connector, plug side




SIN/COS-POSITIONS-FEEDBACK (D0X-INTERFACE FOR 3RD PARTY DRIVES)

The linear motors of the P10-70 series have a contactless, integrated position feedback, which means that an external encoder is not required. The integrated position sensor technology of the motors with D0x interface provides a differential standard 1Vpp sin/cos signal with a 40mm period. The phase position of the sensor signals and the phase currents (with constant force in positive direction) is shown on the right side of the diagram. (The Sin encoder signal is in phase with the current characteristic of phase U).




The arrows show the direction of movement of the slider. The stator remains in its position.

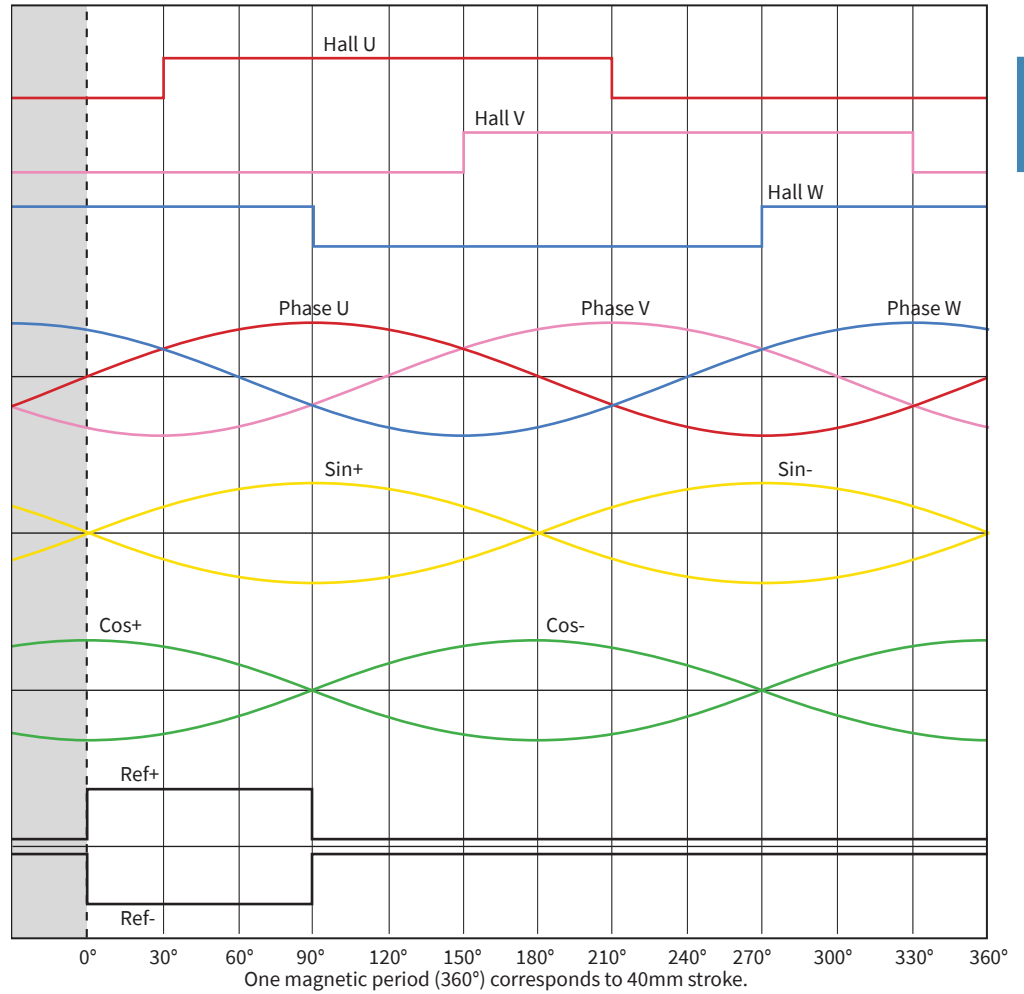

Sin / Cos		P10-70x...-D0x
Output signal period	mm	40
Signal amplitude ¹	V _{pp}	1
Termination ¹	Ohm	120
Supply voltage	Vdc	3...13 (w or w/o sense)
Power consumption	mW	< 1000
		(I < 150mA @ 5VDC, I < 80mA @ 12 VDC) ²

1) Applicable for Sin+/Sin-, Cos+/Cos- and Ref+/Ref- signals. Hall U/V/W are open collector signals.
2) Power efficiency of the motor electronics varies with supply voltage


CONNECTOR PS10-70X80U-BL-QJ-D04/05/08 (SIN/COS-INTERFACE FOR 3RD PARTY DRIVES)




3 ... 13VDC
($I_{max} < 150\text{mA}$ @ 5VDC)
($I_{max} < 80\text{mA}$ @ 12VDC)

Connector Encoder J


View: Motor connector, plug side

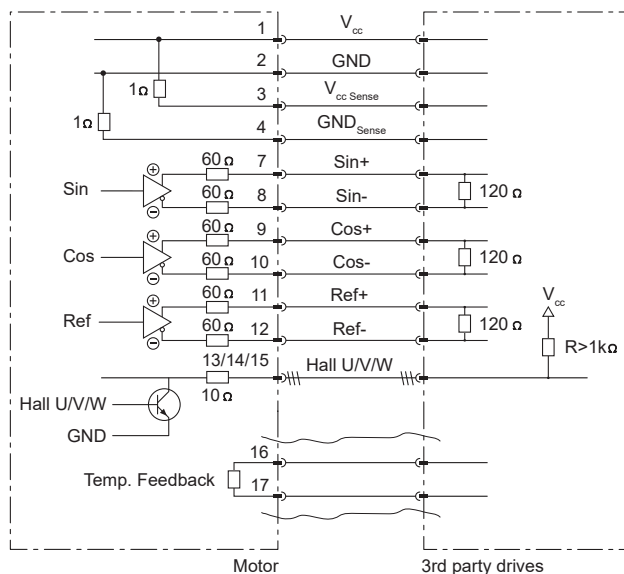

PS10-70X80U-BL-QJ-D04

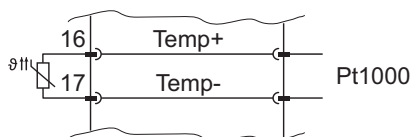


PS10-70X80U-BL-QJ-D05

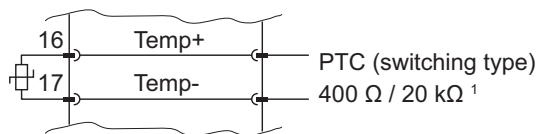

1) $\leq 400\ \Omega$ = no error, $\geq 20\ \text{k}\Omega$ = error

PS10-70X80U-BL-QJ-D08

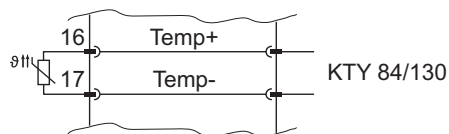


Sin/Cos-Interface: Encoder Connector Wiring





PS10-70x80U-BL-QJ-D04	PS10-70x80U-BL-QJ-D05	PS10-70x80U-BL-QJ-D08	Connector Encoder J	Wire Color Motor Cable KSS05-02/06	Wire Color Motor Cable KSS05-02/13
	3 ... 13 VDC		1	red	white
	GND		2	black	brown
	Vcc Sense (optional)		3	white	green
	GND Sense (optional)		4	brown	yellow
	Do not connect		5	-	-
	Do not connect		6	-	-
	Sin+		7	yellow	grey
	Sin-		8	orange	pink
	Cos+		9	green	blue
	Cos-		10	blue	red
	Ref+		11	-	black
	Ref-		12	-	purple
	Hall U		13	-	grey-red
	Hall V		14	-	red-blue
	Hall W		15	-	white-green
Temp+ (Pt1000 Char.) ²⁾	Temp+ (PTC 400/20k Char.) ²⁾	Temp+ (KTY84/130 Char.) ²⁾	16	-	yellow-brown
Temp- (Pt1000 Char.) ²⁾	Temp- (PTC 400/20k Char.) ²⁾	Temp- (KTY84/130 Char.) ²⁾	17	-	white-yellow

2) The temperature evaluation circuit must have the same galvanic reference potential as the encoder circuit (supply). It should therefore be connected to the supply GND. For correct evaluation, the connection potentials of the emulated temperature sensor must be in the range of the supply potentials.

Valid temperature values can only be measured 50ms after the encoder supply is applied. In the currentless state, a resistance of 200kOhm is measured between pin 16 and 17 is measured. The maximum voltage between pin 16 and 17 must not exceed 16VDC. The maximum current is 15mA.

**Connector Power Q**

View: Motor connector, plug side

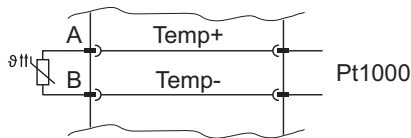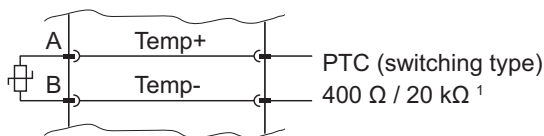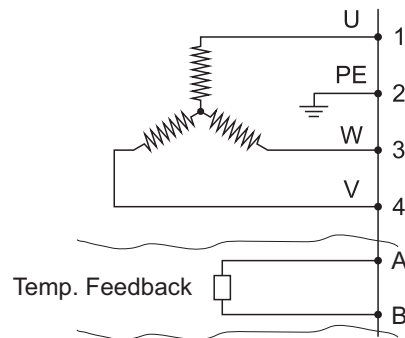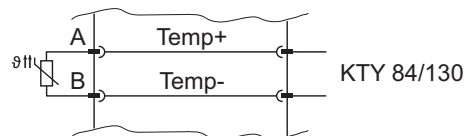PS10-70X80U-BL-QJ-D04**PS10-70X80U-BL-QJ-D05**1) $\leq 400 \Omega$ = no error, $\geq 20 \text{ k}\Omega$ = error**PS10-70X80U-BL-QJ-D08**

Sin/Cos-Interface: Power Connector Wiring					
PS10-70x80U-BL-QJ-D04	PS10-70x80U-BL-QJ-D05	PS10-70x80U-BL-QJ-D08	Connector Power Q	Wire Color Motor Cable KPS15-04	Wire Color Motor Cable KPS15-04/04
Phase U			1	red	red
PE			2	yellow-green	yellow-green
Phase W			3	black	black
Phase V			4	blue	blue
Temp+ (Pt1000) ²⁾	Temp+ (PTC) ²⁾	Temp+ (KTY84/130 Char.) ²⁾	A	n. c.	purple
Temp- (Pt1000) ²⁾	Temp- (PTC) ²⁾	Temp- (KTY84/130 Char.) ²⁾	B	n. c.	grey
n. c.	n. c.	n. c.	C	n. c.	yellow
n. c.	n. c.	n. c.	D	n. c.	brown

2) The temperature evaluation circuit must have the same galvanic reference potential as the encoder circuit (supply). It should therefore be connected to the supply GND. For correct evaluation, the connection potentials of the emulated temperature sensor must be in the range of the supply potentials. Valid temperature values can only be measured 50ms after the encoder supply is applied. In currentless state a resistance of 200kOhm is measured between pin A and B. The maximum voltage between pin A and B must not exceed 16VDC. The maximum current is 15mA.

TEMPERATURE FEEDBACK D04 / D05 / D08

Overheating protection is provided by three internal thermistors embedded in the motor windings. These thermistors are monitored by the motor electronics. A single thermistor is simulated based on the maximum temperature readings. This is done in order to accurately monitor the temperature over the entire length of the stator and to respond as quickly as possible to dynamic changes in a single motor phase. When the temperature of the motor winding reaches its absolute maximum value, the drive amplifier/servo controller must switch off the motor to protect it from overheating damage. Various temperature interfaces – Dx4, Dx5 or Dx8 – are available to support

the temperature evaluation provided by the drive amplifier/servo controller. Depending on the interface and signals used, there are suitable motor cables (see overview table in the Accessories/Motor Cables section).

D04 (Pt1000 dual)

Both the **signal** and **power connectors** feature an emulated **Pt1000 thermistor** for evaluating the maximum motor temperature.

D05 (PTC dual)

Both the **signal** and **power connectors** are fitted with an emulated **PTC thermistor** that switches to high-impedance mode when the maximum motor temperature is exceeded.


D08 (KTY 84/130 dual)

Both the **signal** and **power connectors** feature an emulated **KTY thermistor**, which is used to evaluate the maximum motor temperature.


A/B INCREMENTAL POSITION FEEDBACK (D2X- INTERFACE FOR 3RD PARTY DRIVES)

The linear motors of the P10-70 series have a contactless, integrated position feedback, which means that an external encoder is not required.

The position output of the motors with D2x interface is an industry-standard A/B incremental signal with supplementary reference signal (RS422). Hall switch signals are available for commutation. The relationship between the phase current and the position sensor output is shown on the right.




The arrows show the direction of movement of the slider. The stator remains in its position.

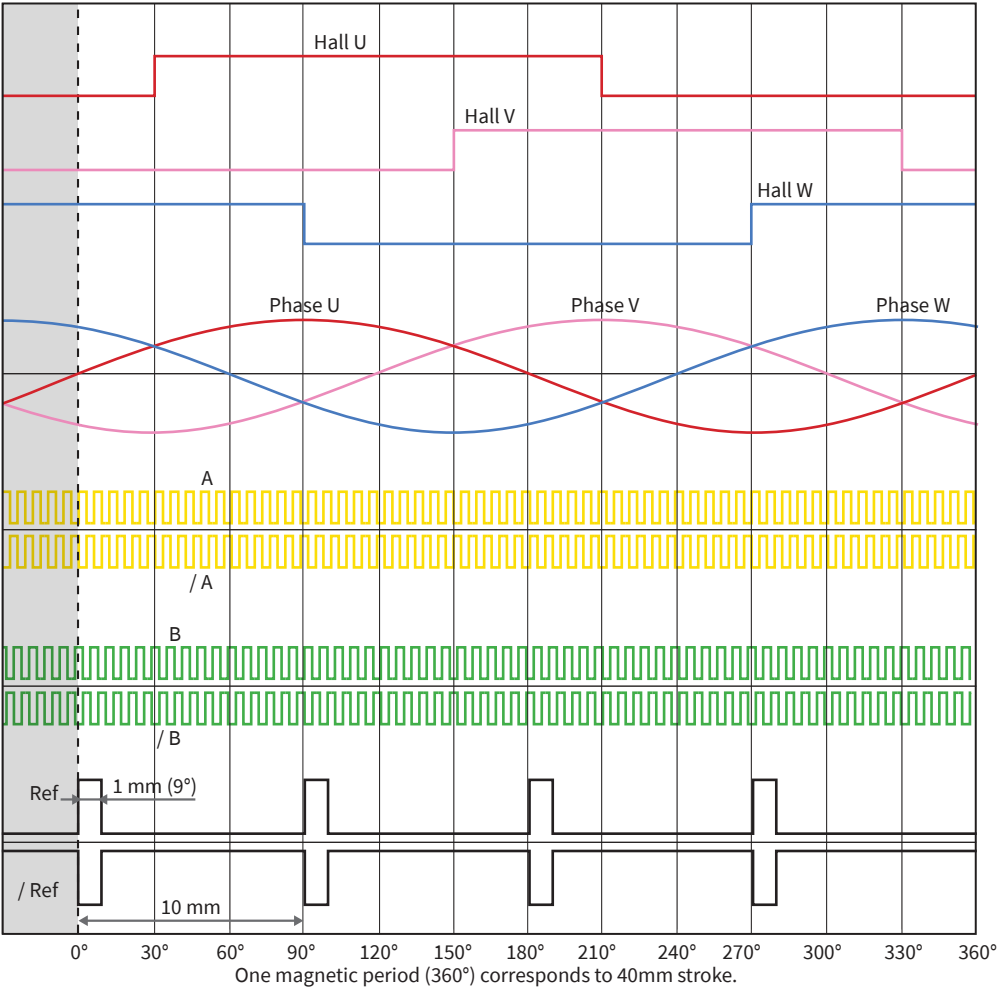

Example:
Min. pulse interval $t = 500 \text{ ns}$
For downstream evaluation, at least the following counter frequency is required:
 $f_{\text{counter}} = 1 / \text{pulse interval}$
 $= 1 / 500 \text{ ns} = 2 \text{ MHz}$




The logical state of signals A and B is not defined in relation to the reference signal Ref. The signal shape may differ from the illustration.

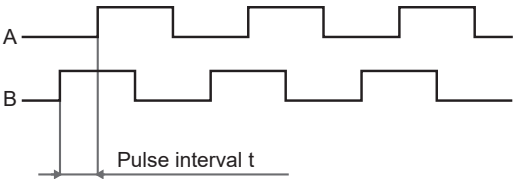

A / B		P10-70x...-D2x	P10-70x...-D2xS
Position Resolution	μm	1	5
Output Type		RS422	
Min. Edge Distance t	ns	100	500
Min. required counter frequency	MHz	10	2
Supply Voltage	Vdc	5-12	
Max. Supply Current	mA	300	300

CONNECTOR PS10-70X80U-BL-QJ-D24 / 24S / 25 / 25S / 26 (A/B-INTERFACE FOR 3RD PARTY DRIVES)




3 ... 13VDC
($I_{max} < 150\text{mA}$ @ 5VDC)
($I_{max} < 80\text{mA}$ @ 12VDC)


Connector Encoder J

View: Motor connector, plug side


PS10-70X80U-BL-QJ-D24 / D24S

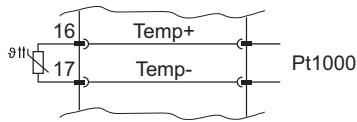


PS10-70X80U-BL-QJ-D25 / D25S



1) $\leq 400\ \Omega$ = no error, $\geq 20\ \text{k}\Omega$ = error

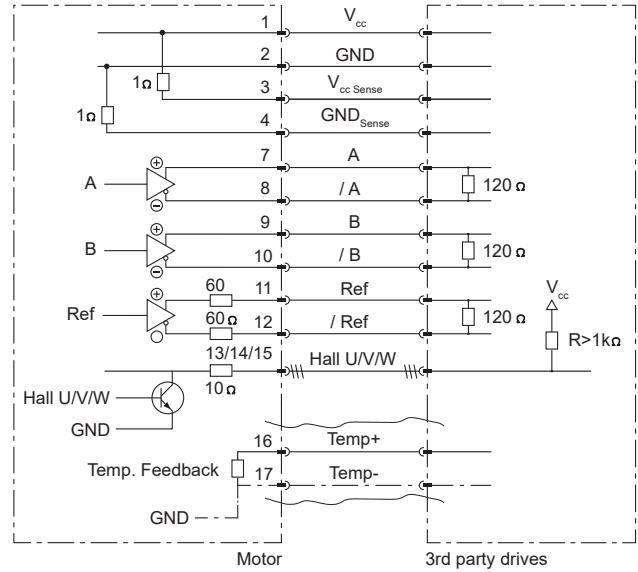


PS10-70X80U-BL-QJ-D26




A/B-Interface: Encoder Connector Wiring					
PS10-70x80U-BL-QJ-D24 PS10-70x80U-BL-QJ-D24S	PS10-70x80U-BL-QJ-D25 PS10-70x80U-BL-QJ-D25S	PS10-70x80U-BL-QJ-D26	Connector Encoder J	Wire Color Motor Cable KSS05-02/06	Wire Color Motor Cable KSS05-02/13
3 ... 13 VDC			1	red	white
GND			2	black	brown
Vcc Sense (optional)			3	white	green
GND Sense (optional)			4	brown	yellow
Do not connect			5	-	-
Do not connect			6	-	-
A			7	yellow	grey
/ A			8	orange	pink
B			9	green	blue
/ B			10	blue	red
Ref			11	-	black
/ Ref			12	-	purple
Hall U			13	-	grey-red
Hall V			14	-	red-blue
Hall W			15	-	white-green
Temp+ (Pt1000 Char.) ²⁾	Temp+ (PTC 400/20k Char.) ²⁾	Temp+ (PTC 400/20k Char.) ²⁾	16	-	yellow-brown
Temp- (Pt1000 Char.) ²⁾	Temp- (PTC 400/20k Char.) ²⁾	Do not connect	17	-	white-yellow

2) The temperature evaluation circuit must have the same galvanic reference potential as the encoder circuit (supply). It should therefore be connected to the supply GND. For correct evaluation, the connection potentials of the emulated temperature sensor must be in the range of the supply potentials. Valid temperature values can only be measured 50ms after the encoder supply is applied. In the currentless state, a resistance of 200kOhm is measured between pin 16 and 17 is measured. The maximum voltage between pin 16 and 17 must not exceed 16VDC. The maximum current is 15mA.




Connector Power Q


View: Motor connector, plug side

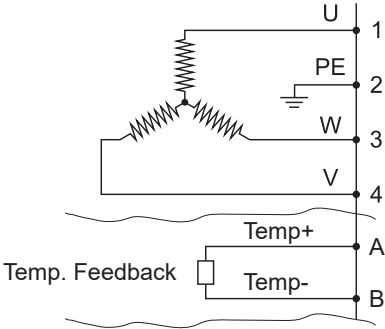

PS10-70X80U-BL-QJ-D24 / D24S

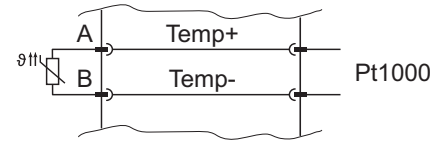

PS10-70X80U-BL-QJ-D25 / D25S

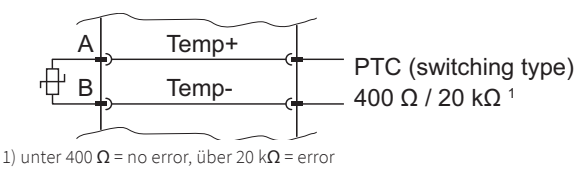

A/B-Interface: Power Connector Wiring					
PS10-70x80U-BL-QJ-D24 PS10-70x80U-BL-QJ-D24S	PS10-70x80U-BL-QJ-D25 PS10-70x80U-BL-QJ-D25S	PS10-70x80U-BL-QJ-D26	Connector Power Q	Wire Color Motor Cable KPS15-04	Wire Color Motor Cable KPS15-04/04
Phase U			1	red	red
PE			2	yellow-green	yellow-green
Phase W			3	black	black
Phase V			4	blue	blue
Temp+ (Pt1000) ²⁾	Temp+ (PTC) ²⁾	n. c.	A	n. c.	purple
Temp- (Pt1000) ²⁾	Temp- (PTC) ²⁾	n. c.	B	n. c.	grey
n. c.	n. c.	n. c.	C	n. c.	yellow
n. c.	n. c.	n. c.	D	n. c.	brown

2) The temperature evaluation circuit must have the same galvanic reference potential as the encoder circuit (supply). It should therefore be connected to the supply GND. For correct evaluation, the connection potentials of the emulated temperature sensor must be in the range of the supply potentials. Valid temperature values can only be measured 50ms after the encoder supply is applied. In currentless state a resistance of 200kOhm is measured between pin A and B. The maximum voltage between pin A and B must not exceed 16VDC. The maximum current is 15mA.

TEMPERATURE FEEDBACK D24 / D24S / D25 / D25S / D26

Overheating protection is provided by three internal thermistors embedded in the motor windings. These thermistors are monitored by the motor electronics. A single thermistor is simulated based on the maximum temperature readings. This is done in order to accurately monitor the temperature over the entire length of the stator and to respond as quickly as possible to dynamic changes in a single motor phase. If the temperature of the motor winding reaches its absolute maximum value, the drive amplifier/servo controller must switch off the motor to protect it from overheating damage. Various temperature interfaces – DX4, DX5 or DX6 – are available to support the temperature evaluation provided by the

drive amplifier/servo controller. Depending on the interface and signals used, there are suitable motor cables (see overview table in the Accessories/Motor Cables section).

D24 / D24S (Pt1000 dual)

An emulated **Pt1000 thermistor** is available on both the **signal** and **power connectors** for evaluating the maximum motor temperature.

D25 / D25S (PTC dual)

An emulated **PTC thermistor** is available on both the **signal** and **power connectors**, which switches to a high-impedance state when the maximum motor temperature is exceeded.


D26 (PTC)

An emulated PTC thermistor is available on the **signal connector**, which switches to a high-impedance state when the maximum motor temperature is exceeded. The emulated **PTC** is internally **connected to GND on one side**, which is why only an additional signal line is connected to the servo controller for evaluation in addition to the power supply.


BISS-C POSITION FEEDBACK (D3X- INTERFACE FOR 3RD PARTY DRIVES)

The linear motors of the P10-70 series have contactless, integrated position feedback, which means that there is no need for an external encoder.

The position feedback of the motors with D3x interface is based on RS422 and the industry-standard BiSS-C protocol. Either the transmitted position or the hall switch signals can be used for commutation. The relationship between the phase current and the encoder signals is shown on the right.



The arrows show the direction of movement of the slider. The stator remains in its position.

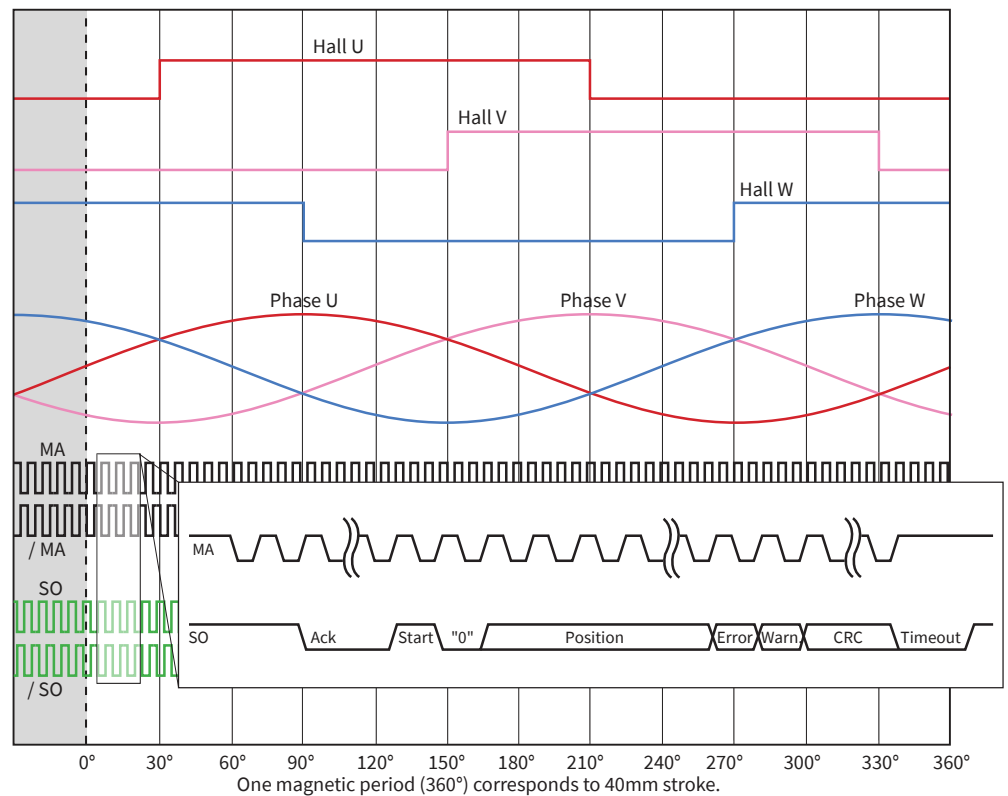

BiSS-C ¹		P10-70x...-D3x		
Singleturn Position Resolution	μm	1		
Output Type		RS422		
Max. Frequency	MHz	3.3		
Min. Edge Distance t	ns	100		
Supply Voltage	Vdc	5 -12		
Max. Supply Current	mA	300		
Data Type		SCDS (Single Cycle Data Sensor)		
Data (Bits)		Position	nER	nWA
		Singleturn	1	1
		34		
Data Format and Alignment		Binary coded, MSB first, right aligned		
CRC polynomial		0x43 (X ⁶ + X ¹ + X ⁰) – CRC bit length 6 bits, CRC is inverted		
CRC Starting Value		0x00		
BiSS Timeout (tm)	μs	~20		
Switch-on Delay	ms	100		

1) Compatible with bidirectional interfaces supporting EDS register access and unidirectional interfaces


Commutation Angle

$$\text{Commutation Angle} = (\text{Position mod magnetic Period}) \cdot \frac{360^\circ}{\text{Magnetic Period}}$$

First, the position data is reduced to the range within a magnetic period using modulo.

This relative position value is then converted into an electrical angle.

BISS-C-FRAME DESCRIPTION

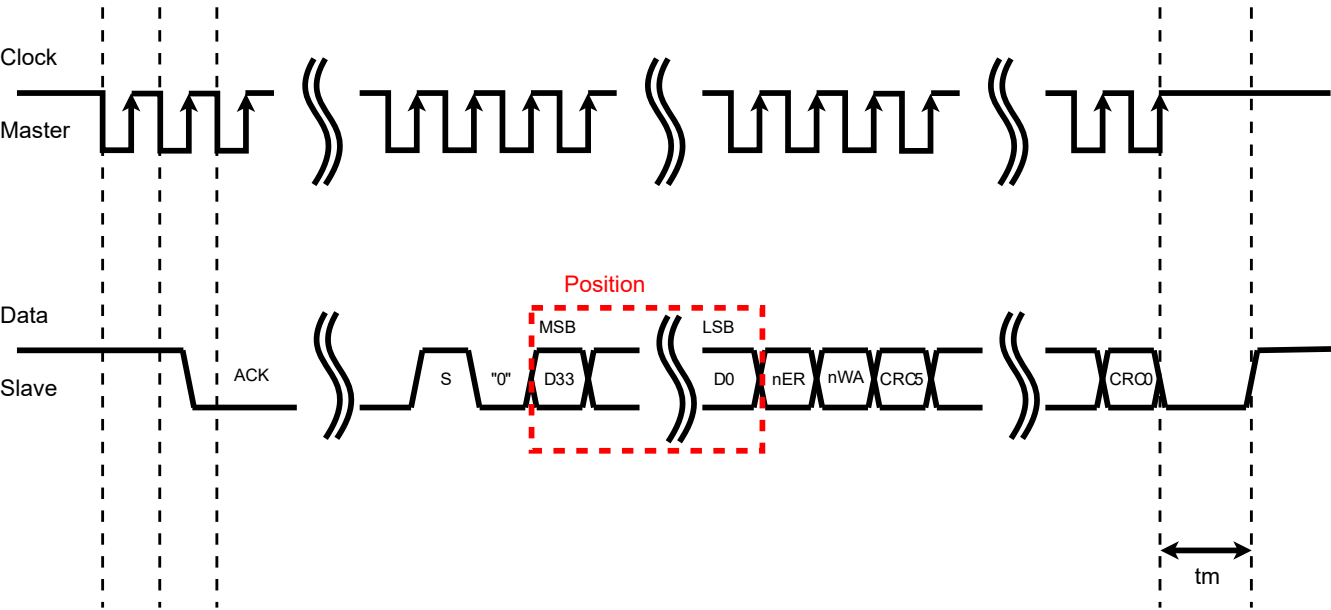

Singleturn Position 34 Bit: D33-D0

Binary coded, MSB first
Resolution per bit = 1 μ m
After switching on the encoder, the position starts with an offset of 3 m. In addition to the offset, the current position angle of the slider within a pole pair (magnetic period) of the motor is added to this. This position can be used for commutation.

Errorbit: nER

0: error; 1: no error (active low).
Indicates an encoder error. If this bit indicates an error, the position must be treated as invalid.

Warnbit: nWA

0: warning; 1: no warning (active low).
Displays encoder warnings. The position is still valid if only a warning is displayed.

CRC 6 Bit: CRC5-0

Polynomial : 0x43
Initial value : 0x00
The CRC is calculated via position, error and warning bits.
It is transmitted with MSB first and inverted. The start bit and the "0" bit are omitted from the CRC calculation.



Register and Memory Definitions

A description of how a BiSS-C master can access registers can be found at www.biss-interface.com.

BiSS-C - XML



The encoder is compatible with the "Standard Encoder Profile (BP3)".
The function of the XML file is to automatically assign device properties in the master using the BiSS identifier.
The XML file can be used by masters to facilitate the configuration of slave devices. It can be downloaded from www.linmot.com.

CONNECTOR PS10-70X80U-BL-QJ-D34 (BISS-C INTERFACE FOR 3RD PARTY DRIVES)

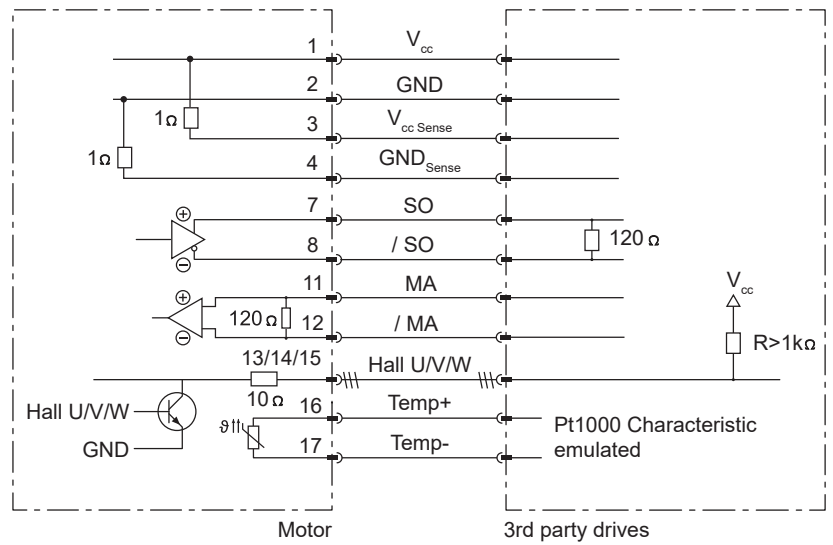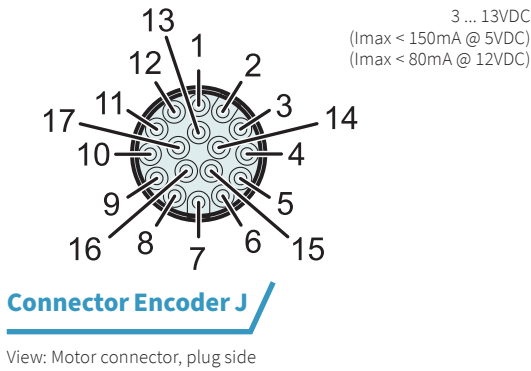

BiSS-C-Interface: Encoder Connector Wiring			
PS10-70x80U-BL-QJ-D34	Function	Connector Encoder J	Wire Color Motor Cable KSS05-02/13
3 ... 13 VDC	Supply	1	white
GND	Supply	2	brown
Vcc Sense (optional)	Supply Sense	3	green
GND Sense (optional)	Supply Sense	4	yellow
Do not connect	–	5	–
Do not connect	–	6	–
SO (Slave out)	Encoder RS422	7	grey
/ SO (Slave out)	Encoder RS422	8	pink
Do not connect	–	9	blue
Do not connect	–	10	red
MA (Master clock)	Encoder RS422	11	black
/ MA (Master clock)	Encoder RS422	12	purple
Hall U	Encoder (open collector)	13	grey-red
Hall V	Encoder (open collector)	14	red-blue
Hall W	Encoder (open collector)	15	white-green
Temp+ (Pt1000)	Temperature ¹	16	yellow-brown
Temp- (Pt1000)	Temperature ¹	17	white-yellow

1) The temperature evaluation circuit must have the same galvanic reference potential as the encoder circuit (supply). It should therefore be connected to the supply GND. For correct evaluation, the connection potentials of the emulated temperature sensor must be in the range of the supply potentials. Valid temperature values can only be measured 50ms after the encoder supply is applied. In the currentless state, a resistance of 200kOhm is measured between pin 16 and 17 is measured. The maximum voltage between pin 16 and 17 must not exceed 16VDC. The maximum current is 15mA.

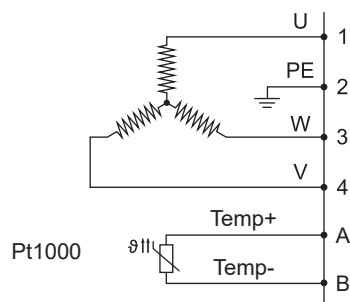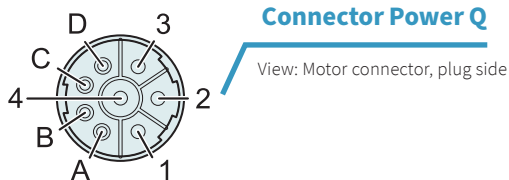

BiSS-C-Interface: Power Connector Wiring			
PS10-70x80U-BL-QJ-D34	Connector Power Q	Wire Color Motor Cable KPS15-04	Wire Color Motor Cable KPS15-04/04
Phase U	1	red	red
PE	2	yellow-green	yellow-green
Phase W	3	black	black
Phase V	4	blue	blue
Pt1000+ ¹⁾	A	n. c.	purple
Pt1000- ¹⁾	B	n. c.	grey
n. c.	C	n. c.	yellow
n. c.	D	n. c.	brown

1) The temperature evaluation circuit must have the same galvanic reference potential as the encoder circuit (supply). It should therefore be connected to the supply GND. For correct evaluation, the connection potentials of the emulated temperature sensor must be in the range of the supply potentials. Valid temperature values can only be measured 50ms after the encoder supply is applied. In currentless state a resistance of 200kOhm is measured between pin A and B. The maximum voltage between pin A and B must not exceed 16VDC. The maximum current is 15mA.

TEMPERATURE FEEDBACK DX4

Overheating protection is provided by three internal thermistors embedded in the motor windings. These thermistors are monitored by the motor electronics. A single thermistor is simulated based on the maximum temperature readings. This is done in order to accurately monitor the temperature over the entire length of the stator and to react as quickly as possible to dynamic changes in a single motor phase. If the temperature


of the motor winding reaches its absolute maximum value, the drive amplifier/servo controller must switch off the motor to protect it from damage due to overheating. A DX4 temperature interface is available to support the temperature evaluation provided by the drive amplifier/servo controller. LinMot offers the appropriate motor cables for this purpose (see overview table in the Accessories/Motor Cables section).

D34 (Pt1000 dual)
Both the **signal** and **power connectors** feature an emulated **Pt1000 thermistor** for evaluating the maximum motor temperature.

SLIDER

Slider Standard


The groove marks the front slider end.

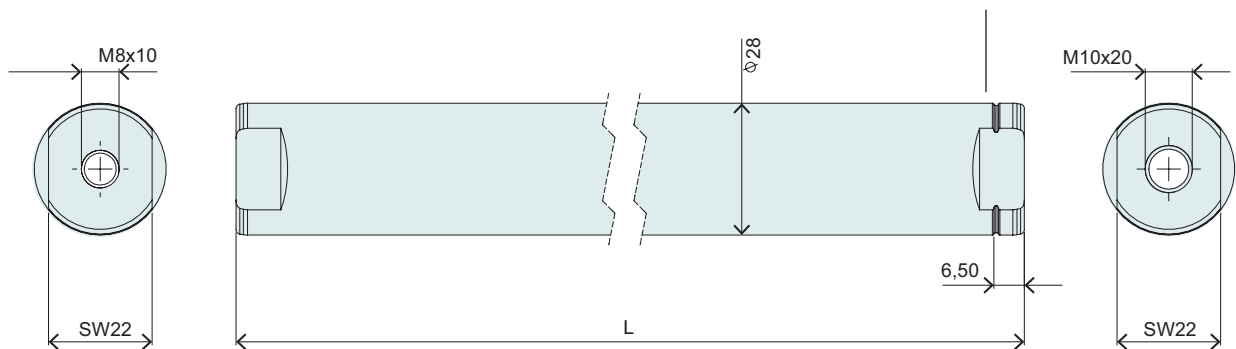

Slider Standard			
Item	Description	Max. Stroke [mm]	Item-No.
PL10-28x290/240	Slider for P10-70 'standard'	70	0150-2193
PL10-28x390/340	Slider for P10-70 'standard'	170	0150-2194
PL10-28x490/440	Slider for P10-70 'standard'	270	0150-2195
PL10-28x590/540	Slider for P10-70 'standard'	370	0150-2196
PL10-28x690/640	Slider for P10-70 'standard'	470	0150-2197
PL10-28x790/740	Slider for P10-70 'standard'	570	0150-2198
PL10-28x890/840	Slider for P10-70 'standard'	670	0150-2199
PL10-28x990/940	Slider for P10-70 'standard'	770	0150-2203
PL10-28x1190/1140	Slider for P10-70 'standard'	970	0150-2204
PL10-28x1390/1340	Slider for P10-70 'standard'	1170	0150-2205
PL10-28x1590/1540	Slider for P10-70 'standard'	1370	0150-2206
PL10-28x1790/1740	Slider for P10-70 'standard'	1570	0150-2207
PL10-28x1990/1940	Slider for P10-70 'standard'	1770	0150-2208

P10-70x80U/70-BL-QJ

Max. Stroke: 70 mm
Peak Force: 561 N

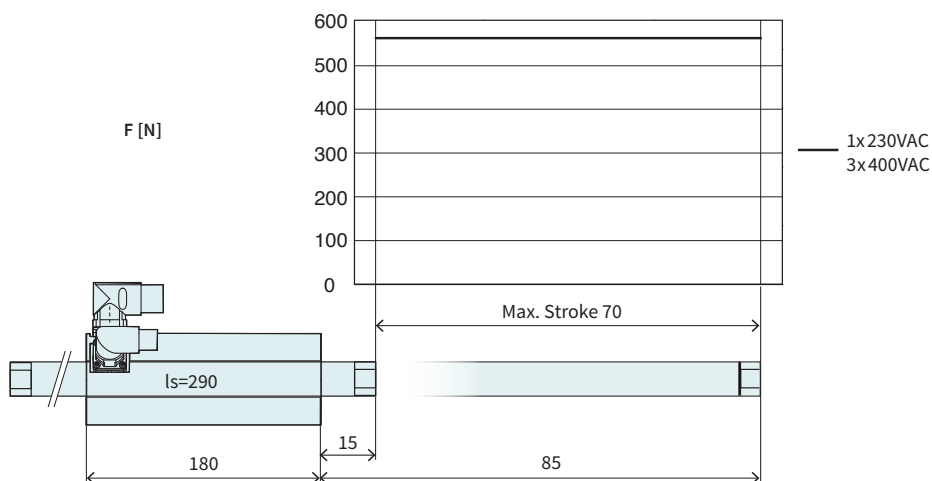


Dimensions in mm

Stroke			
Max. Stroke	mm (in)	70	(2.75)
Force			
Max. Force ¹ @ 1x230VAC	N (lbf)	561	(126)
Max. Force ¹ @ 3x400VAC	N (lbf)	561	(126)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N (lbf)	67 / 100 / 180	(15 / 23 / 41)
Max. Border Force relative	%	100	
Force Constant 1	N/A _{pk} (lbf/A _{pk})	51	(11.5)
Force Constant 2	N/A _{rms} (lbf/A _{rms})	72.1	(16.2)
Velocity			
Max. Velocity @ 1x230VAC	m/s (in/s)	3.5	(139.9)
Max. Velocity @ 3x400VAC	m/s (in/s)	6.1	(6.1)
Position Detection			
Repeatability	mm (in)	±0.05	(±0.002)
Linearity	%	± 0.8	
Electrical Data			
Max. Current ¹ @ 1x230VAC	A _{pk} / A _{rms}	10.9 / 7.7	
Max. Current ¹ @ 3x400VAC	A _{pk} / A _{rms}	10.9 / 7.7	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A _{pk}	1.3 / 2 / 3.5	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A _{rms}	0.93 / 1.4 / 2.5	
Thermal Data			
Max. Winding Temperature (Sensor)	°C	90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W	2.6 / 1.1 / 0.36	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s	2100 / 500 / 110	
Mechanical Data			
Slider Length	mm (in)	290	(11)
Slider Mass	g (lb)	1360	(3)

1) Real time calculation of motor winding temperature is required (including monitoring).


If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 60 % of the peak value has to be taken instead.



Item	Description	Item-No.
PS10-70x80U-BL-QJ	Stator 3x400VAC, LinMot Encoder	0150-1291
PS10-70x80U-BL-QJ-D04	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	0150-4260
PS10-70x80U-BL-QJ-D05	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	0150-4605
PS10-70x80U-BL-QJ-D08	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, KTY dual	0150-4510
PS10-70x80U-BL-QJ-D24	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	0150-4130
PS10-70x80U-BL-QJ-D24S	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	0150-4595
PS10-70x80U-BL-QJ-D25	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	0150-5760
PS10-70x80U-BL-QJ-D25S	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	0150-4600
PS10-70x80U-BL-QJ-D26	Stator 3x400VAC, A/B Encoder 1µm, PTC single ended	on request
PS10-70x80U-BL-QJ-D34	Stator 3x400VAC, Biss-C, Pt1000 dual	0150-4870
PL10-28x290/240	Slider for P10-70 'standard'	0150-2193

P10-70x80U/170-BL-QJ

Max. Stroke: 170 mm
Peak Force: 561 N

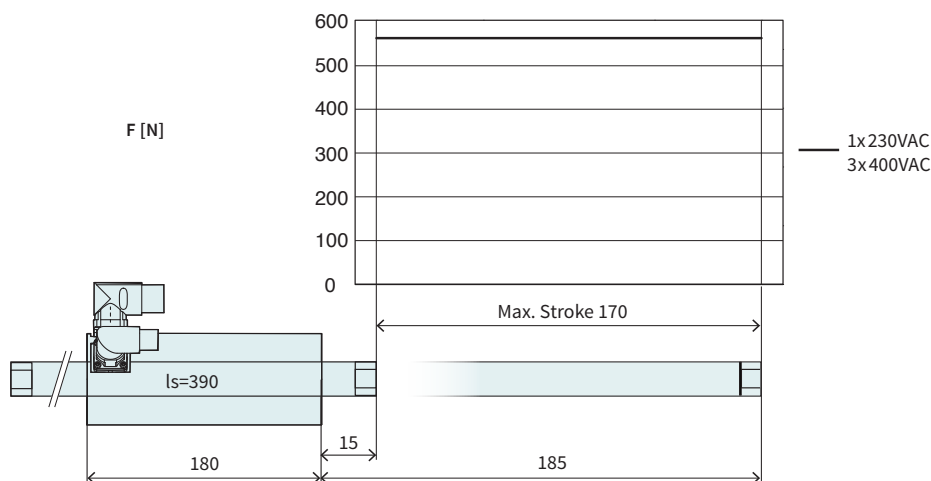


Dimensions in mm

Stroke			
Max. Stroke	mm (in)	170	(6.69)
Force			
Max. Force ¹ @ 1x230VAC	N (lbf)	561	(126)
Max. Force ¹ @ 3x400VAC	N (lbf)	561	(126)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N (lbf)	67 / 100 / 180	(15 / 23 / 41)
Max. Border Force relative	%	100	
Force Constant 1	N/A _{pk} (lbf/A _{pk})	51	(11.5)
Force Constant 2	N/A _{rms} (lbf/A _{rms})	72.1	(16.2)
Velocity			
Max. Velocity @ 1x230VAC	m/s (in/s)	3.5	(139.9)
Max. Velocity @ 3x400VAC	m/s (in/s)	6.1	(6.1)
Position Detection			
Repeatability	mm (in)	±0.05	(±0.002)
Linearity	%	± 0.4	
Electrical Data			
Max. Current ¹ @ 1x230VAC	A _{pk} / A _{rms}	10.9 / 7.7	
Max. Current ¹ @ 3x400VAC	A _{pk} / A _{rms}	10.9 / 7.7	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A _{pk}	1.3 / 2 / 3.5	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A _{rms}	0.93 / 1.4 / 2.5	
Thermal Data			
Max. Winding Temperature (Sensor)	°C	90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W	2.6 / 1.1 / 0.36	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s	2100 / 500 / 110	
Mechanical Data			
Slider Length	mm (in)	390	(15)
Slider Mass	g (lb)	1830	(4.03)

1) Real time calculation of motor winding temperature is required (including monitoring).


If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 60 % of the peak value has to be taken instead.



Item	Description	Item-No.
PS10-70x80U-BL-QJ	Stator 3x400VAC, LinMot Encoder	0150-1291
PS10-70x80U-BL-QJ-D04	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	0150-4260
PS10-70x80U-BL-QJ-D05	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	0150-4605
PS10-70x80U-BL-QJ-D08	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, KTY dual	0150-4510
PS10-70x80U-BL-QJ-D24	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	0150-4130
PS10-70x80U-BL-QJ-D24S	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	0150-4595
PS10-70x80U-BL-QJ-D25	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	0150-5760
PS10-70x80U-BL-QJ-D25S	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	0150-4600
PS10-70x80U-BL-QJ-D26	Stator 3x400VAC, A/B Encoder 1µm, PTC single ended	on request
PS10-70x80U-BL-QJ-D34	Stator 3x400VAC, Biss-C, Pt1000 dual	0150-4870
PL10-28x390/340	Slider for P10-70 'standard'	0150-2194

P10-70x80U/270-BL-QJ

Max. Stroke: 270 mm
Peak Force: 561 N

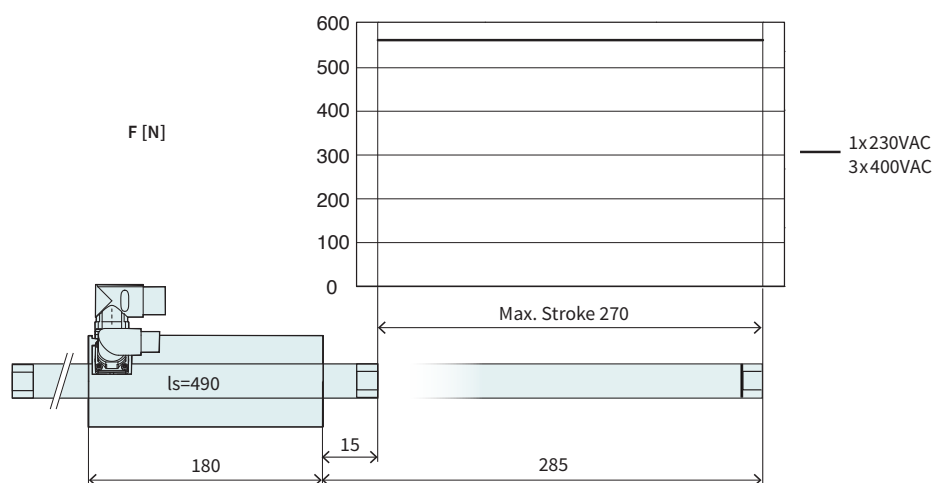


Dimensions in mm

Stroke			
Max. Stroke	mm (in)	270	(10.59)
Force			
Max. Force ¹ @ 1x230VAC	N (lbf)	561	(126)
Max. Force ¹ @ 3x400VAC	N (lbf)	561	(126)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N (lbf)	67 / 100 / 180	(15 / 23 / 41)
Max. Border Force relative	%	100	
Force Constant 1	N/A _{pk} (lbf/A _{pk})	51	(11.5)
Force Constant 2	N/A _{rms} (lbf/A _{rms})	72.1	(16.2)
Velocity			
Max. Velocity @ 1x230VAC	m/s (in/s)	3.5	(139.9)
Max. Velocity @ 3x400VAC	m/s (in/s)	6.1	(6.1)
Position Detection			
Repeatability	mm (in)	±0.05	(±0.002)
Linearity	%	± 0.3	
Electrical Data			
Max. Current ¹ @ 1x230VAC	A _{pk} / A _{rms}	10.9 / 7.7	
Max. Current ¹ @ 3x400VAC	A _{pk} / A _{rms}	10.9 / 7.7	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A _{pk}	1.3 / 2 / 3.5	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A _{rms}	0.93 / 1.4 / 2.5	
Thermal Data			
Max. Winding Temperature (Sensor)	°C	90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W	2.6 / 1.1 / 0.36	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s	2100 / 500 / 110	
Mechanical Data			
Slider Length	mm (in)	490	(19)
Slider Mass	g (lb)	2300	(5.06)

1) Real time calculation of motor winding temperature is required (including monitoring).


If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 60 % of the peak value has to be taken instead.



Item	Description	Item-No.
PS10-70x80U-BL-QJ	Stator 3x400VAC, LinMot Encoder	0150-1291
PS10-70x80U-BL-QJ-D04	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	0150-4260
PS10-70x80U-BL-QJ-D05	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	0150-4605
PS10-70x80U-BL-QJ-D08	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, KTY dual	0150-4510
PS10-70x80U-BL-QJ-D24	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	0150-4130
PS10-70x80U-BL-QJ-D24S	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	0150-4595
PS10-70x80U-BL-QJ-D25	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	0150-5760
PS10-70x80U-BL-QJ-D25S	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	0150-4600
PS10-70x80U-BL-QJ-D26	Stator 3x400VAC, A/B Encoder 1µm, PTC single ended	on request
PS10-70x80U-BL-QJ-D34	Stator 3x400VAC, Biss-C, Pt1000 dual	0150-4870
PL10-28x490/440	Slider for P10-70 'standard'	0150-2195

P10-70x80U/370-BL-QJ

Max. Stroke: 370 mm
Peak Force: 561 N

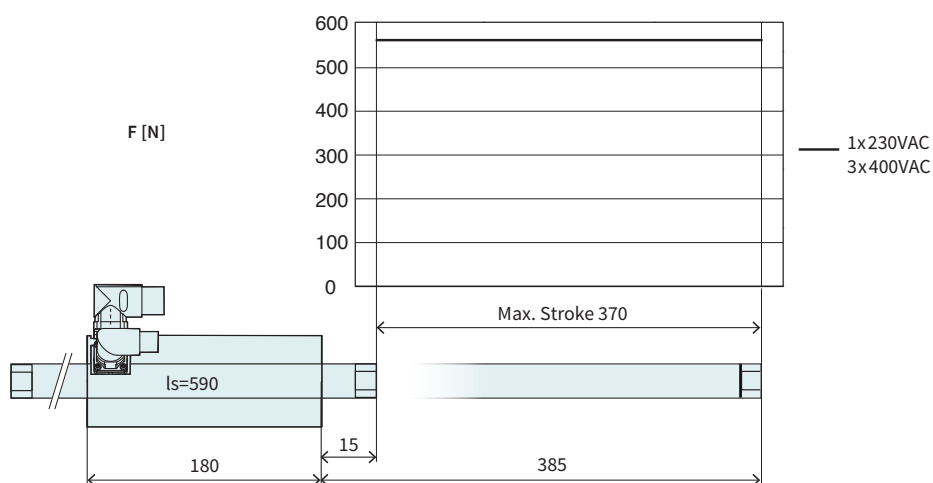


Dimensions in mm

Stroke				
Max. Stroke	mm	(in)	370	(14.59)
Force				
Max. Force ¹ @ 1x230VAC	N	(lbf)	561	(126)
Max. Force ¹ @ 3x400VAC	N	(lbf)	561	(126)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N	(lbf)	67 / 100 / 180	(15 / 23 / 41)
Max. Border Force relative	%		100	
Force Constant 1	N/A _{pk}	(lbf/A _{pk})	51	(11.5)
Force Constant 2	N/A _{rms}	(lbf/A _{rms})	72.1	(16.2)
Velocity				
Max. Velocity @ 1x230VAC	m/s	(in/s)	3.5	(139.9)
Max. Velocity @ 3x400VAC	m/s	(in/s)	6.1	(6.1)
Position Detection				
Repeatability	mm	(in)	±0.05	(±0.002)
Linearity	%		±0.25	
Electrical Data				
Max. Current ¹ @ 1x230VAC	A _{pk} / A _{rms}		10.9 / 7.7	
Max. Current ¹ @ 3x400VAC	A _{pk} / A _{rms}		10.9 / 7.7	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A _{pk}		1.3 / 2 / 3.5	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A _{rms}		0.93 / 1.4 / 2.5	
Thermal Data				
Max. Winding Temperature (Sensor)	°C		90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W		2.6 / 1.1 / 0.36	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s		2100 / 500 / 110	
Mechanical Data				
Slider Length	mm	(in)	590	(23)
Slider Mass	g	(lb)	2770	(6.09)

1) Real time calculation of motor winding temperature is required (including monitoring).


If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 60 % of the peak value has to be taken instead.



Item	Description	Item-No.
PS10-70x80U-BL-QJ	Stator 3x400VAC, LinMot Encoder	0150-1291
PS10-70x80U-BL-QJ-D04	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	0150-4260
PS10-70x80U-BL-QJ-D05	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	0150-4605
PS10-70x80U-BL-QJ-D08	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, KTY dual	0150-4510
PS10-70x80U-BL-QJ-D24	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	0150-4130
PS10-70x80U-BL-QJ-D24S	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	0150-4595
PS10-70x80U-BL-QJ-D25	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	0150-5760
PS10-70x80U-BL-QJ-D25S	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	0150-4600
PS10-70x80U-BL-QJ-D26	Stator 3x400VAC, A/B Encoder 1µm, PTC single ended	on request
PS10-70x80U-BL-QJ-D34	Stator 3x400VAC, Biss-C, Pt1000 dual	0150-4870
PL10-28x590/540	Slider for P10-70 'standard'	0150-2196

P10-70x80U/470-BL-QJ

Max. Stroke: 470 mm
Peak Force: 561 N

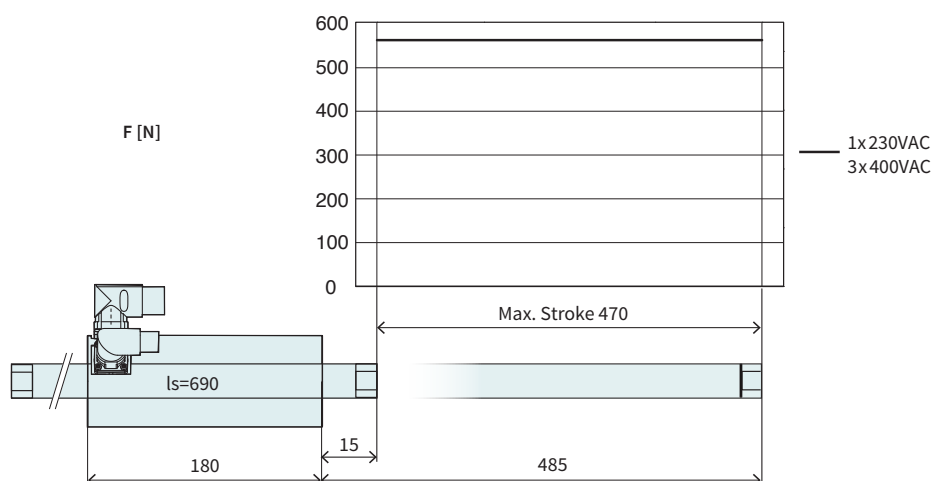


Dimensions in mm

Stroke			
Max. Stroke	mm (in)	470	(18.49)
Force			
Max. Force ¹ @ 1x230VAC	N (lbf)	561	(126)
Max. Force ¹ @ 3x400VAC	N (lbf)	561	(126)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N (lbf)	67 / 100 / 180	(15 / 23 / 41)
Max. Border Force relative	%	100	
Force Constant 1	N/A _{pk} (lbf/A _{pk})	51	(11.5)
Force Constant 2	N/A _{rms} (lbf/A _{rms})	72.1	(16.2)
Velocity			
Max. Velocity @ 1x230VAC	m/s (in/s)	3.5	(139.9)
Max. Velocity @ 3x400VAC	m/s (in/s)	6.1	(6.1)
Position Detection			
Repeatability	mm (in)	±0.05	(±0.002)
Linearity	%	± 0.2	
Electrical Data			
Max. Current ¹ @ 1x230VAC	A _{pk} / A _{rms}	10.9 / 7.7	
Max. Current ¹ @ 3x400VAC	A _{pk} / A _{rms}	10.9 / 7.7	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A _{pk}	1.3 / 2 / 3.5	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A _{rms}	0.93 / 1.4 / 2.5	
Thermal Data			
Max. Winding Temperature (Sensor)	°C	90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W	2.6 / 1.1 / 0.36	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s	2100 / 500 / 110	
Mechanical Data			
Slider Length	mm (in)	690	(27)
Slider Mass	g (lb)	3240	(7.13)

¹ Real time calculation of motor winding temperature is required (including monitoring).


If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 60 % of the peak value has to be taken instead.



Item	Description	Item-No.
PS10-70x80U-BL-QJ	Stator 3x400VAC, LinMot Encoder	0150-1291
PS10-70x80U-BL-QJ-D04	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	0150-4260
PS10-70x80U-BL-QJ-D05	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	0150-4605
PS10-70x80U-BL-QJ-D08	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, KTY dual	0150-4510
PS10-70x80U-BL-QJ-D24	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	0150-4130
PS10-70x80U-BL-QJ-D24S	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	0150-4595
PS10-70x80U-BL-QJ-D25	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	0150-5760
PS10-70x80U-BL-QJ-D25S	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	0150-4600
PS10-70x80U-BL-QJ-D26	Stator 3x400VAC, A/B Encoder 1µm, PTC single ended	on request
PS10-70x80U-BL-QJ-D34	Stator 3x400VAC, Biss-C, Pt1000 dual	0150-4870
PL10-28x690/640	Slider for P10-70 'standard'	0150-2197

P10-70x80U/570-BL-QJ

Max. Stroke: 570 mm
Peak Force: 561 N

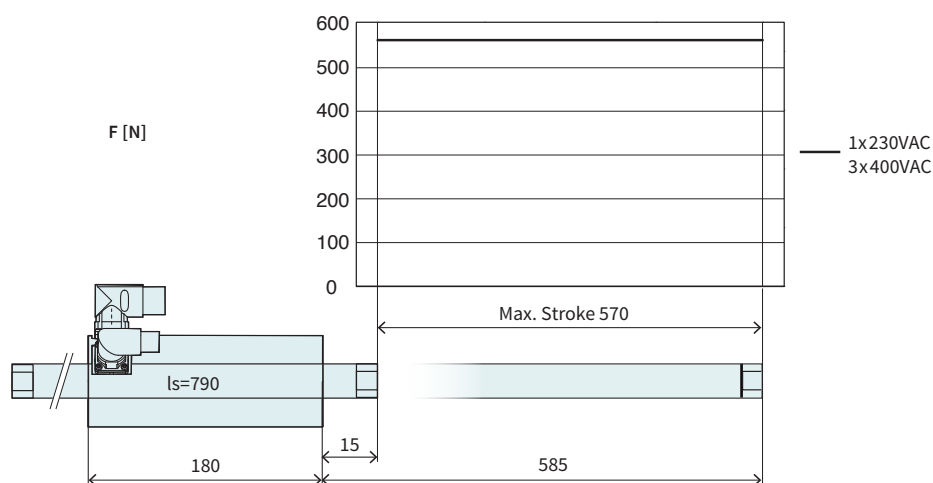


Dimensions in mm

Stroke				
Max. Stroke	mm	(in)	570	(22.39)
Force				
Max. Force ¹ @ 1x230VAC	N	(lbf)	561	(126)
Max. Force ¹ @ 3x400VAC	N	(lbf)	561	(126)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N	(lbf)	67 / 100 / 180	(15 / 23 / 41)
Max. Border Force relative	%		100	
Force Constant 1	N/A _{pk}	(lbf/A _{pk})	51	(11.5)
Force Constant 2	N/A _{rms}	(lbf/A _{rms})	72.1	(16.2)
Velocity				
Max. Velocity @ 1x230VAC	m/s	(in/s)	3.5	(139.9)
Max. Velocity @ 3x400VAC	m/s	(in/s)	6.1	(6.1)
Position Detection				
Repeatability	mm	(in)	±0.05	(±0.002)
Linearity	%		± 0.2	
Electrical Data				
Max. Current ¹ @ 1x230VAC	A _{pk} / A _{rms}		10.9 / 7.7	
Max. Current ¹ @ 3x400VAC	A _{pk} / A _{rms}		10.9 / 7.7	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A _{pk}		1.3 / 2 / 3.5	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A _{rms}		0.93 / 1.4 / 2.5	
Thermal Data				
Max. Winding Temperature (Sensor)	°C		90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W		2.6 / 1.1 / 0.36	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s		2100 / 500 / 110	
Mechanical Data				
Slider Length	mm	(in)	790	(31)
Slider Mass	g	(lb)	3710	(8.16)

1) Real time calculation of motor winding temperature is required (including monitoring).


If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 60 % of the peak value has to be taken instead.



Item	Description	Item-No.
PS10-70x80U-BL-QJ	Stator 3x400VAC, LinMot Encoder	0150-1291
PS10-70x80U-BL-QJ-D04	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	0150-4260
PS10-70x80U-BL-QJ-D05	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	0150-4605
PS10-70x80U-BL-QJ-D08	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, KTY dual	0150-4510
PS10-70x80U-BL-QJ-D24	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	0150-4130
PS10-70x80U-BL-QJ-D24S	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	0150-4595
PS10-70x80U-BL-QJ-D25	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	0150-5760
PS10-70x80U-BL-QJ-D25S	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	0150-4600
PS10-70x80U-BL-QJ-D26	Stator 3x400VAC, A/B Encoder 1µm, PTC single ended	on request
PS10-70x80U-BL-QJ-D34	Stator 3x400VAC, Biss-C, Pt1000 dual	0150-4870
PL10-28x790/740	Slider for P10-70 'standard'	0150-2198

P10-70x80U/670-BL-QJ

Max. Stroke: 670 mm
Peak Force: 561 N

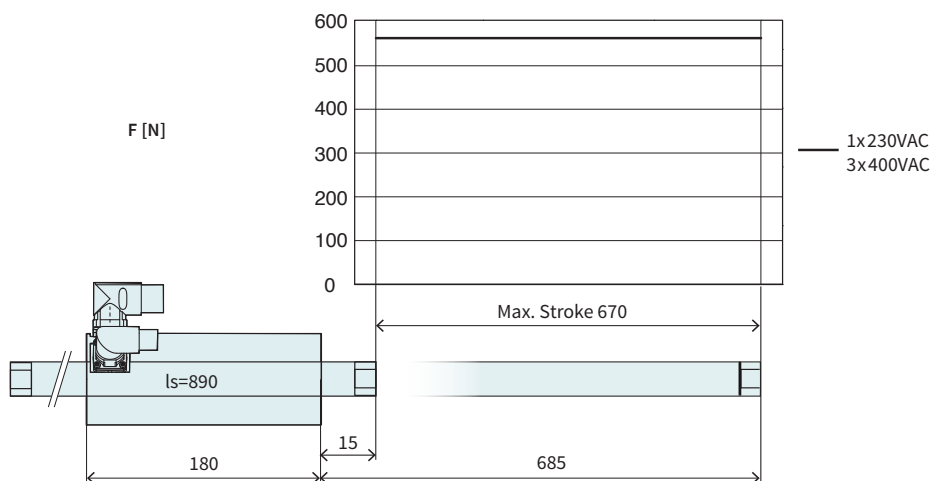


Dimensions in mm

Stroke			
Max. Stroke	mm (in)	670	(26.39)
Force			
Max. Force ¹ @ 1x230VAC	N (lbf)	561	(126)
Max. Force ¹ @ 3x400VAC	N (lbf)	561	(126)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N (lbf)	67 / 100 / 180	(15 / 23 / 41)
Max. Border Force relative	%	100	
Force Constant 1	N/A _{pk} (lbf/A _{pk})	51	(11.5)
Force Constant 2	N/A _{rms} (lbf/A _{rms})	72.1	(16.2)
Velocity			
Max. Velocity @ 1x230VAC	m/s (in/s)	3.5	(139.9)
Max. Velocity @ 3x400VAC	m/s (in/s)	6.1	(6.1)
Position Detection			
Repeatability	mm (in)	±0.05	(±0.002)
Linearity	%	± 0.15	
Electrical Data			
Max. Current ¹ @ 1x230VAC	A _{pk} / A _{rms}	10.9 / 7.7	
Max. Current ¹ @ 3x400VAC	A _{pk} / A _{rms}	10.9 / 7.7	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A _{pk}	1.3 / 2 / 3.5	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A _{rms}	0.93 / 1.4 / 2.5	
Thermal Data			
Max. Winding Temperature (Sensor)	°C	90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W	2.6 / 1.1 / 0.36	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s	2100 / 500 / 110	
Mechanical Data			
Slider Length	mm (in)	890	(35)
Slider Mass	g (lb)	4180	(9.2)

¹ Real time calculation of motor winding temperature is required (including monitoring).


If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 60 % of the peak value has to be taken instead.



Item	Description	Item-No.
PS10-70x80U-BL-QJ	Stator 3x400VAC, LinMot Encoder	0150-1291
PS10-70x80U-BL-QJ-D04	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	0150-4260
PS10-70x80U-BL-QJ-D05	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	0150-4605
PS10-70x80U-BL-QJ-D08	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, KTY dual	0150-4510
PS10-70x80U-BL-QJ-D24	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	0150-4130
PS10-70x80U-BL-QJ-D24S	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	0150-4595
PS10-70x80U-BL-QJ-D25	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	0150-5760
PS10-70x80U-BL-QJ-D25S	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	0150-4600
PS10-70x80U-BL-QJ-D26	Stator 3x400VAC, A/B Encoder 1µm, PTC single ended	on request
PS10-70x80U-BL-QJ-D34	Stator 3x400VAC, Biss-C, Pt1000 dual	0150-4870
PL10-28x890/840	Slider for P10-70 'standard'	0150-2199

P10-70x80U/770-BL-QJ

Max. Stroke: 770 mm
Peak Force: 561 N

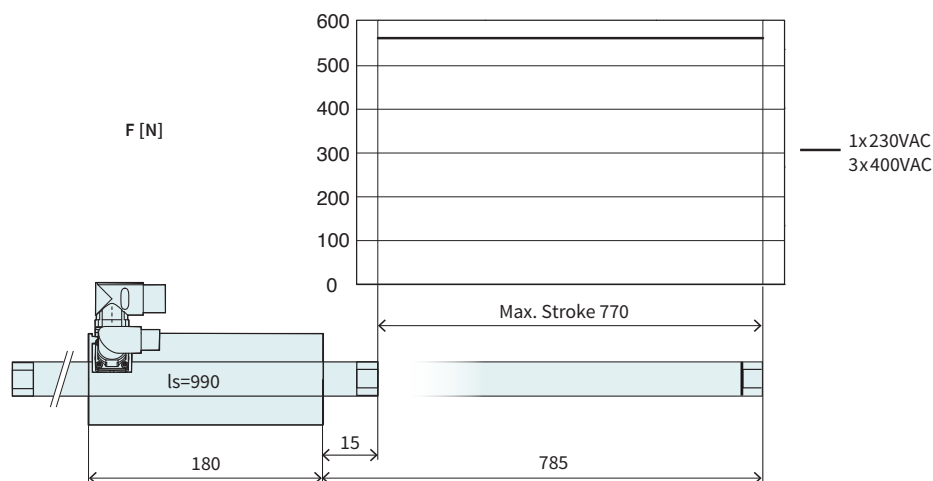


Dimensions in mm

Stroke				
Max. Stroke	mm	(in)	770	(30.3)
Force				
Max. Force ¹ @ 1x230VAC	N	(lbf)	561	(126)
Max. Force ¹ @ 3x400VAC	N	(lbf)	561	(126)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N	(lbf)	67 / 100 / 180	(15 / 23 / 41)
Max. Border Force relative	%		100	
Force Constant 1	N/A _{pk}	(lbf/A _{pk})	51	(11.5)
Force Constant 2	N/A _{rms}	(lbf/A _{rms})	72.1	(16.2)
Velocity				
Max. Velocity @ 1x230VAC	m/s	(in/s)	3.5	(139.9)
Max. Velocity @ 3x400VAC	m/s	(in/s)	6.1	(6.1)
Position Detection				
Repeatability	mm	(in)	±0.05	(±0.002)
Linearity	%		± 0.15	
Electrical Data				
Max. Current ¹ @ 1x230VAC	A _{pk} / A _{rms}		10.9 / 7.7	
Max. Current ¹ @ 3x400VAC	A _{pk} / A _{rms}		10.9 / 7.7	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A _{pk}		1.3 / 2 / 3.5	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A _{rms}		0.93 / 1.4 / 2.5	
Thermal Data				
Max. Winding Temperature (Sensor)	°C		90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W		2.6 / 1.1 / 0.36	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s		2100 / 500 / 110	
Mechanical Data				
Slider Length	mm	(in)	990	(39)
Slider Mass	g	(lb)	4650	(10.23)

1) Real time calculation of motor winding temperature is required (including monitoring).


If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 60 % of the peak value has to be taken instead.



Item	Description	Item-No.
PS10-70x80U-BL-QJ	Stator 3x400VAC, LinMot Encoder	0150-1291
PS10-70x80U-BL-QJ-D04	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	0150-4260
PS10-70x80U-BL-QJ-D05	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	0150-4605
PS10-70x80U-BL-QJ-D08	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, KTY dual	0150-4510
PS10-70x80U-BL-QJ-D24	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	0150-4130
PS10-70x80U-BL-QJ-D24S	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	0150-4595
PS10-70x80U-BL-QJ-D25	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	0150-5760
PS10-70x80U-BL-QJ-D25S	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	0150-4600
PS10-70x80U-BL-QJ-D26	Stator 3x400VAC, A/B Encoder 1µm, PTC single ended	on request
PS10-70x80U-BL-QJ-D34	Stator 3x400VAC, Biss-C, Pt1000 dual	0150-4870
PL10-28x990/940	Slider for P10-70 'standard'	0150-2203

P10-70x80U/970-BL-QJ

Max. Stroke: 970 mm
Peak Force: 561 N

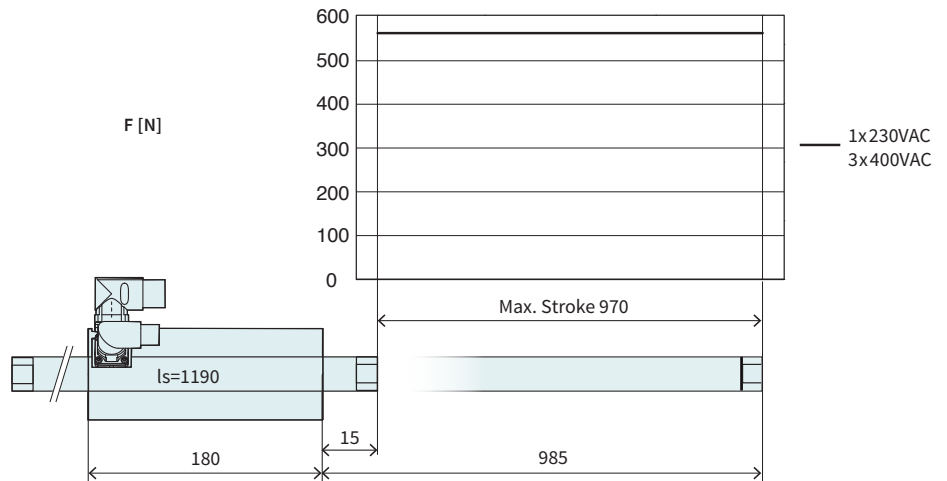


Dimensions in mm

Stroke			
Max. Stroke	mm (in)	970	(38.2)
Force			
Max. Force ¹ @ 1x230VAC	N (lbf)	561	(126)
Max. Force ¹ @ 3x400VAC	N (lbf)	561	(126)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N (lbf)	67 / 100 / 180	(15 / 23 / 41)
Max. Border Force relative	%	100	
Force Constant 1	N/A _{pk} (lbf/A _{pk})	51	(11.5)
Force Constant 2	N/A _{rms} (lbf/A _{rms})	72.1	(16.2)
Velocity			
Max. Velocity @ 1x230VAC	m/s (in/s)	3.5	(139.9)
Max. Velocity @ 3x400VAC	m/s (in/s)	6.1	(6.1)
Position Detection			
Repeatability	mm (in)	±0.05	(±0.002)
Linearity	%	± 0.15	
Electrical Data			
Max. Current ¹ @ 1x230VAC	A _{pk} / A _{rms}	10.9 / 7.7	
Max. Current ¹ @ 3x400VAC	A _{pk} / A _{rms}	10.9 / 7.7	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A _{pk}	1.3 / 2 / 3.5	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A _{rms}	0.93 / 1.4 / 2.5	
Thermal Data			
Max. Winding Temperature (Sensor)	°C	90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W	2.6 / 1.1 / 0.36	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s	2100 / 500 / 110	
Mechanical Data			
Slider Length	mm (in)	1190	(47)
Slider Mass	g (lb)	5590	(12.3)

1) Real time calculation of motor winding temperature is required (including monitoring).


If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 60 % of the peak value has to be taken instead.



Item	Description	Item-No.
PS10-70x80U-BL-QJ	Stator 3x400VAC, LinMot Encoder	0150-1291
PS10-70x80U-BL-QJ-D04	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	0150-4260
PS10-70x80U-BL-QJ-D05	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	0150-4605
PS10-70x80U-BL-QJ-D08	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, KTY dual	0150-4510
PS10-70x80U-BL-QJ-D24	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	0150-4130
PS10-70x80U-BL-QJ-D24S	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	0150-4595
PS10-70x80U-BL-QJ-D25	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	0150-5760
PS10-70x80U-BL-QJ-D25S	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	0150-4600
PS10-70x80U-BL-QJ-D26	Stator 3x400VAC, A/B Encoder 1µm, PTC single ended	on request
PS10-70x80U-BL-QJ-D34	Stator 3x400VAC, Biss-C, Pt1000 dual	0150-4870
PL10-28x1190/1140	Slider for P10-70 'standard'	0150-2204

P10-70x80U/1170-BL-QJ

Max. Stroke: 1170 mm
Peak Force: 561 N

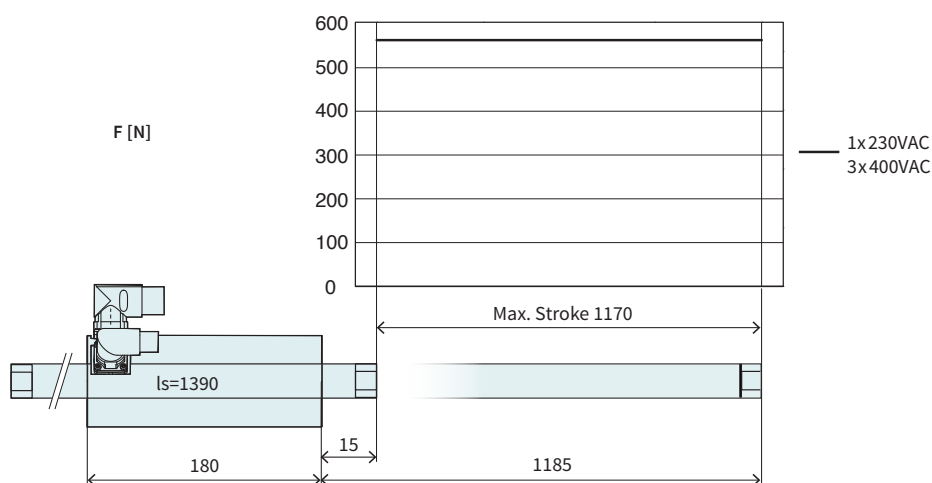


Dimensions in mm

Stroke				
Max. Stroke	mm	(in)	1170	(46.1)
Force				
Max. Force ¹ @ 1x230VAC	N	(lbf)	561	(126)
Max. Force ¹ @ 3x400VAC	N	(lbf)	561	(126)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N	(lbf)	67 / 100 / 180	(15 / 23 / 41)
Max. Border Force relative	%		100	
Force Constant 1	N/A _{pk}	(lbf/A _{pk})	51	(11.5)
Force Constant 2	N/A _{rms}	(lbf/A _{rms})	72.1	(16.2)
Velocity				
Max. Velocity @ 1x230VAC	m/s	(in/s)	3.5	(139.9)
Max. Velocity @ 3x400VAC	m/s	(in/s)	6.1	(6.1)
Position Detection				
Repeatability	mm	(in)	±0.05	(±0.002)
Linearity	%		± 0.15	
Electrical Data				
Max. Current ¹ @ 1x230VAC	A _{pk} / A _{rms}		10.9 / 7.7	
Max. Current ¹ @ 3x400VAC	A _{pk} / A _{rms}		10.9 / 7.7	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A _{pk}		1.3 / 2 / 3.5	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A _{rms}		0.93 / 1.4 / 2.5	
Thermal Data				
Max. Winding Temperature (Sensor)	°C		90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W		2.6 / 1.1 / 0.36	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s		2100 / 500 / 110	
Mechanical Data				
Slider Length	mm	(in)	1390	(55)
Slider Mass	g	(lb)	6530	(14.37)

1) Real time calculation of motor winding temperature is required (including monitoring).


If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 60 % of the peak value has to be taken instead.



Item	Description	Item-No.
PS10-70x80U-BL-QJ	Stator 3x400VAC, LinMot Encoder	0150-1291
PS10-70x80U-BL-QJ-D04	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	0150-4260
PS10-70x80U-BL-QJ-D05	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	0150-4605
PS10-70x80U-BL-QJ-D08	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, KTY dual	0150-4510
PS10-70x80U-BL-QJ-D24	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	0150-4130
PS10-70x80U-BL-QJ-D24S	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	0150-4595
PS10-70x80U-BL-QJ-D25	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	0150-5760
PS10-70x80U-BL-QJ-D25S	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	0150-4600
PS10-70x80U-BL-QJ-D26	Stator 3x400VAC, A/B Encoder 1µm, PTC single ended	on request
PS10-70x80U-BL-QJ-D34	Stator 3x400VAC, Biss-C, Pt1000 dual	0150-4870
PL10-28x1390/1340	Slider for P10-70 'standard'	0150-2205

P10-70x80U/1370-BL-QJ

Max. Stroke: 1370 mm
Peak Force: 561 N

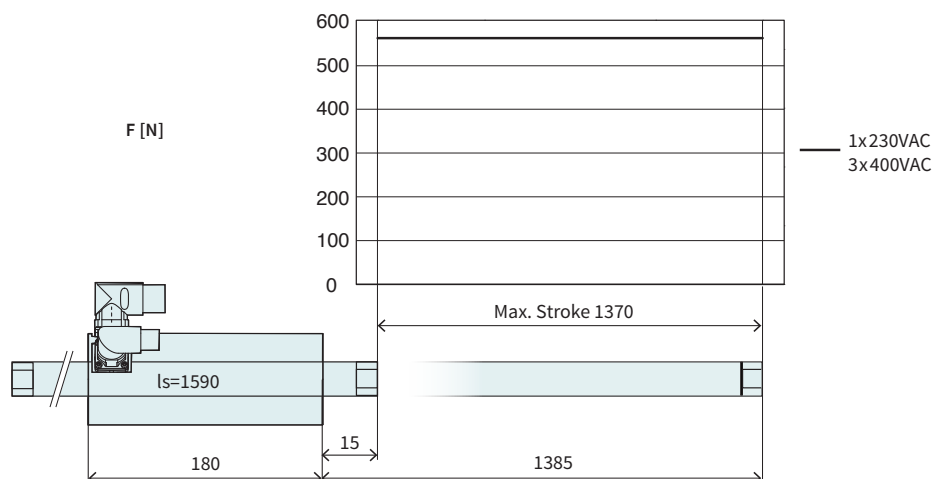


Dimensions in mm

Stroke			
Max. Stroke	mm (in)	1370	(53.89)
Force			
Max. Force ¹ @ 1x230VAC	N (lbf)	561	(126)
Max. Force ¹ @ 3x400VAC	N (lbf)	561	(126)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N (lbf)	67 / 100 / 180	(15 / 23 / 41)
Max. Border Force relative	%	100	
Force Constant 1	N/A _{pk} (lbf/A _{pk})	51	(11.5)
Force Constant 2	N/A _{rms} (lbf/A _{rms})	72.1	(16.2)
Velocity			
Max. Velocity @ 1x230VAC	m/s (in/s)	3.5	(139.9)
Max. Velocity @ 3x400VAC	m/s (in/s)	6.1	(6.1)
Position Detection			
Repeatability	mm (in)	±0.05	(±0.002)
Linearity	%	± 0.15	
Electrical Data			
Max. Current ¹ @ 1x230VAC	A _{pk} / A _{rms}	10.9 / 7.7	
Max. Current ¹ @ 3x400VAC	A _{pk} / A _{rms}	10.9 / 7.7	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A _{pk}	1.3 / 2 / 3.5	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A _{rms}	0.93 / 1.4 / 2.5	
Thermal Data			
Max. Winding Temperature (Sensor)	°C	90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W	2.6 / 1.1 / 0.36	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s	2100 / 500 / 110	
Mechanical Data			
Slider Length	mm (in)	1590	(63)
Slider Mass	g (lb)	7470	(16.43)

1) Real time calculation of motor winding temperature is required (including monitoring).


If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 60 % of the peak value has to be taken instead.



Item	Description	Item-No.
PS10-70x80U-BL-QJ	Stator 3x400VAC, LinMot Encoder	0150-1291
PS10-70x80U-BL-QJ-D04	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	0150-4260
PS10-70x80U-BL-QJ-D05	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	0150-4605
PS10-70x80U-BL-QJ-D08	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, KTY dual	0150-4510
PS10-70x80U-BL-QJ-D24	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	0150-4130
PS10-70x80U-BL-QJ-D24S	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	0150-4595
PS10-70x80U-BL-QJ-D25	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	0150-5760
PS10-70x80U-BL-QJ-D25S	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	0150-4600
PS10-70x80U-BL-QJ-D26	Stator 3x400VAC, A/B Encoder 1µm, PTC single ended	on request
PS10-70x80U-BL-QJ-D34	Stator 3x400VAC, Biss-C, Pt1000 dual	0150-4870
PL10-28x1590/1540	Slider for P10-70 'standard'	0150-2206

P10-70x80U/1570-BL-QJ

Max. Stroke: 1570 mm
Peak Force: 561 N

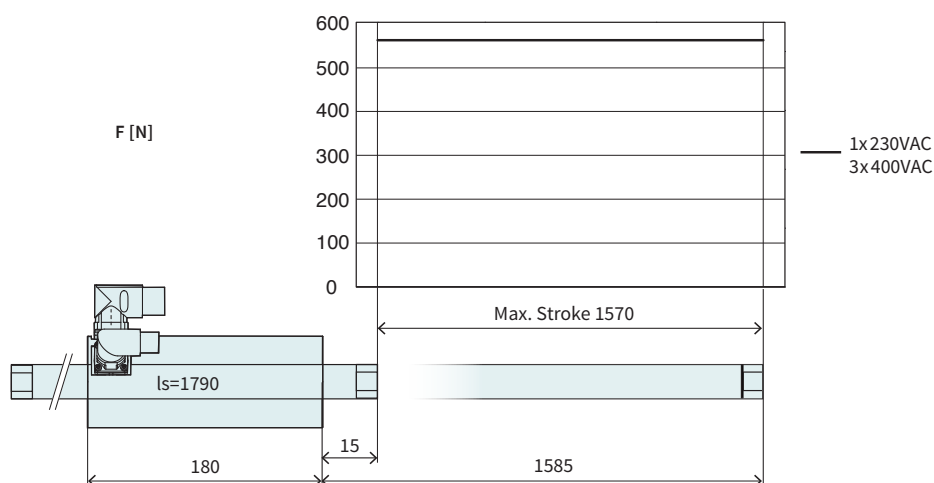


Dimensions in mm

Stroke				
Max. Stroke	mm	(in)	1570	(61.79)
Force				
Max. Force ¹ @ 1x230VAC	N	(lbf)	561	(126)
Max. Force ¹ @ 3x400VAC	N	(lbf)	561	(126)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N	(lbf)	67 / 100 / 180	(15 / 23 / 41)
Max. Border Force relative	%		100	
Force Constant 1	N/A _{pk}	(lbf/A _{pk})	51	(11.5)
Force Constant 2	N/A _{rms}	(lbf/A _{rms})	72.1	(16.2)
Velocity				
Max. Velocity @ 1x230VAC	m/s	(in/s)	3.5	(139.9)
Max. Velocity @ 3x400VAC	m/s	(in/s)	6.1	(6.1)
Position Detection				
Repeatability	mm	(in)	±0.05	(±0.002)
Linearity	%		± 0.15	
Electrical Data				
Max. Current ¹ @ 1x230VAC	A _{pk} / A _{rms}		10.9 / 7.7	
Max. Current ¹ @ 3x400VAC	A _{pk} / A _{rms}		10.9 / 7.7	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A _{pk}		1.3 / 2 / 3.5	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A _{rms}		0.93 / 1.4 / 2.5	
Thermal Data				
Max. Winding Temperature (Sensor)	°C		90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W		2.6 / 1.1 / 0.36	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s		2100 / 500 / 110	
Mechanical Data				
Slider Length	mm	(in)	1790	(70)
Slider Mass	g	(lb)	8413	(18.51)

1) Real time calculation of motor winding temperature is required (including monitoring).


If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 60 % of the peak value has to be taken instead.



Item	Description	Item-No.
PS10-70x80U-BL-QJ	Stator 3x400VAC, LinMot Encoder	0150-1291
PS10-70x80U-BL-QJ-D04	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	0150-4260
PS10-70x80U-BL-QJ-D05	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	0150-4605
PS10-70x80U-BL-QJ-D08	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, KTY dual	0150-4510
PS10-70x80U-BL-QJ-D24	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	0150-4130
PS10-70x80U-BL-QJ-D24S	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	0150-4595
PS10-70x80U-BL-QJ-D25	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	0150-5760
PS10-70x80U-BL-QJ-D25S	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	0150-4600
PS10-70x80U-BL-QJ-D26	Stator 3x400VAC, A/B Encoder 1µm, PTC single ended	on request
PS10-70x80U-BL-QJ-D34	Stator 3x400VAC, Biss-C, Pt1000 dual	0150-4870
PL10-28x1790/1740	Slider for P10-70 'standard'	0150-2207

P10-70x80U/1770-BL-QJ

Max. Stroke: 1770 mm
Peak Force: 561 N

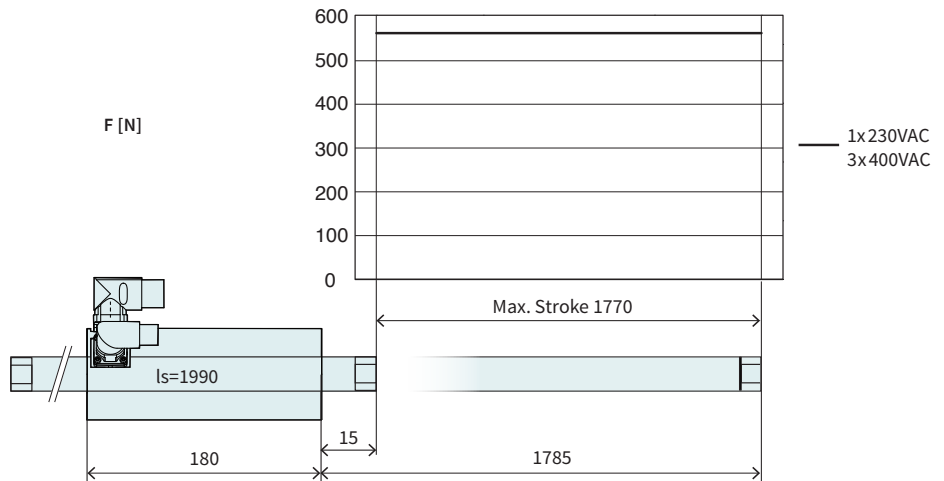


Dimensions in mm

Stroke			
Max. Stroke	mm (in)	1770	(69.7)
Force			
Max. Force ¹ @ 1x230VAC	N (lbf)	561	(126)
Max. Force ¹ @ 3x400VAC	N (lbf)	561	(126)
Max. Cont. Force [Passive cooling / Fan / Fluid]	N (lbf)	67 / 100 / 180	(15 / 23 / 41)
Max. Border Force relative	%	100	
Force Constant 1	N/A _{pk} (lbf/A _{pk})	51	(11.5)
Force Constant 2	N/A _{rms} (lbf/A _{rms})	72.1	(16.2)
Velocity			
Max. Velocity @ 1x230VAC	m/s (in/s)	3.5	(139.9)
Max. Velocity @ 3x400VAC	m/s (in/s)	6.1	(6.1)
Position Detection			
Repeatability	mm (in)	±0.05	(±0.002)
Linearity	%	± 0.15	
Electrical Data			
Max. Current ¹ @ 1x230VAC	A _{pk} / A _{rms}	10.9 / 7.7	
Max. Current ¹ @ 3x400VAC	A _{pk} / A _{rms}	10.9 / 7.7	
Max. Cont. Current 1 [Passive cooling / Fan / Fluid]	A _{pk}	1.3 / 2 / 3.5	
Max. Cont. Current 2 [Passive cooling / Fan / Fluid]	A _{rms}	0.93 / 1.4 / 2.5	
Thermal Data			
Max. Winding Temperature (Sensor)	°C	90	
Thermal Resistance [Passive cooling / Fan / Fluid]	°K/W	2.6 / 1.1 / 0.36	
Thermal Time Constant [Passive cooling / Fan / Fluid]	s	2100 / 500 / 110	
Mechanical Data			
Slider Length	mm (in)	1990	(78)
Slider Mass	g (lb)	9350	(20.57)

1) Real time calculation of motor winding temperature is required (including monitoring).

If temperature monitoring is only based on temperature sensor signal (missing thermal model calculation), 60 % of the peak value has to be taken instead.



Item	Description	Item-No.
PS10-70x80U-BL-QJ	Stator 3x400VAC, LinMot Encoder	0150-1291
PS10-70x80U-BL-QJ-D04	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	0150-4260
PS10-70x80U-BL-QJ-D05	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	0150-4605
PS10-70x80U-BL-QJ-D08	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, KTY dual	0150-4510
PS10-70x80U-BL-QJ-D24	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	0150-4130
PS10-70x80U-BL-QJ-D24S	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	0150-4595
PS10-70x80U-BL-QJ-D25	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	0150-5760
PS10-70x80U-BL-QJ-D25S	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	0150-4600
PS10-70x80U-BL-QJ-D26	Stator 3x400VAC, A/B Encoder 1µm, PTC single ended	on request
PS10-70x80U-BL-QJ-D34	Stator 3x400VAC, Biss-C, Pt1000 dual	0150-4870
PL10-28x1990/1940	Slider for P10-70 'standard'	0150-2208

Linear Guides H10



HM10-70x80/70		Linear Module 70x80 with 70 mm Stroke		
→	H-Guide	H10-70x80/70	H-Guide for P10-70x80, Stroke max. 70 mm	0150-5404
	Stator	PS10-70x80U-BL-QJ	Stator 3x400VAC, LinMot Encoder	0150-1291
		PS10-70x80U-BL-QJ-D04	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	0150-4260
		PS10-70x80U-BL-QJ-D05	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	0150-4605
		PS10-70x80U-BL-QJ-D08	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, KTY dual	0150-4510
		PS10-70x80U-BL-QJ-D24	Stator 3x400VAC, A/B Encoder 1μm, Pt1000 dual	0150-4130
		PS10-70x80U-BL-QJ-D24S	Stator 3x400VAC, A/B Encoder 5μm, Pt1000 dual	0150-4595
		PS10-70x80U-BL-QJ-D25	Stator 3x400VAC, A/B Encoder 1μm, PTC dual	0150-5760
		PS10-70x80U-BL-QJ-D25S	Stator 3x400VAC, A/B Encoder 5μm, PTC dual	0150-4600a
		PS10-70x80U-BL-QJ-D26	Stator 3x400VAC, A/B Encoder 1μm, PTC single ended	on request
		PS10-70x80U-BL-QJ-D34	Stator 3x400VAC, BiSS-C, Pt1000 dual	0150-4870
	Slider	PL10-28x290/240	Slider for P10-70 'standard'	0150-2193
HM10-70x80/170		Linear Module 70x80 with 170 mm Stroke		
→	H-Guide	H10-70x80/170	H-Guide for P10-70x80, Stroke max. 170 mm	0150-5405
	Stator	PS10-70x80U-BL-QJ	Stator 3x400VAC, LinMot Encoder	0150-1291
		PS10-70x80U-BL-QJ-D04	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	0150-4260
		PS10-70x80U-BL-QJ-D05	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	0150-4605
		PS10-70x80U-BL-QJ-D08	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, KTY dual	0150-4510
		PS10-70x80U-BL-QJ-D24	Stator 3x400VAC, A/B Encoder 1μm, Pt1000 dual	0150-4130
		PS10-70x80U-BL-QJ-D24S	Stator 3x400VAC, A/B Encoder 5μm, Pt1000 dual	0150-4595
		PS10-70x80U-BL-QJ-D25	Stator 3x400VAC, A/B Encoder 1μm, PTC dual	0150-5760
		PS10-70x80U-BL-QJ-D25S	Stator 3x400VAC, A/B Encoder 5μm, PTC dual	0150-4600a
		PS10-70x80U-BL-QJ-D26	Stator 3x400VAC, A/B Encoder 1μm, PTC single ended	on request
		PS10-70x80U-BL-QJ-D34	Stator 3x400VAC, BiSS-C, Pt1000 dual	0150-4870
	Slider	PL10-28x390/340	Slider for P10-70 'standard'	0150-2194

HM10-70x80/270

Linear Module 70x80 with 270 mm Stroke

→	H-Guide	H10-70x80/270	H-Guide for P10-70x80, Stroke max. 270 mm	0150-5406
→	Stator	PS10-70x80U-BL-QJ	Stator 3x400VAC, LinMot Encoder	0150-1291
		PS10-70x80U-BL-QJ-D04	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	0150-4260
		PS10-70x80U-BL-QJ-D05	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	0150-4605
		PS10-70x80U-BL-QJ-D08	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, KTY dual	0150-4510
		PS10-70x80U-BL-QJ-D24	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	0150-4130
		PS10-70x80U-BL-QJ-D24S	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	0150-4595
		PS10-70x80U-BL-QJ-D25	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	0150-5760
		PS10-70x80U-BL-QJ-D25S	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	0150-4600a
		PS10-70x80U-BL-QJ-D26	Stator 3x400VAC, A/B Encoder 1µm, PTC single ended	on request
		PS10-70x80U-BL-QJ-D34	Stator 3x400VAC, BiSS-C, Pt1000 dual	0150-4870
→	Slider	PL10-28x590/540	Slider for P10-70 'standard'	0150-2196

HM10-70x80/370

Linear Module 70x80 with 370 mm Stroke

→	H-Guide	H10-70x80/370	H-Guide for P10-70x80, Stroke max. 370 mm	0150-5407
→	Stator	PS10-70x80U-BL-QJ	Stator 3x400VAC, LinMot Encoder	0150-1291
		PS10-70x80U-BL-QJ-D04	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	0150-4260
		PS10-70x80U-BL-QJ-D05	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	0150-4605
		PS10-70x80U-BL-QJ-D08	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, KTY dual	0150-4510
		PS10-70x80U-BL-QJ-D24	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	0150-4130
		PS10-70x80U-BL-QJ-D24S	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	0150-4595
		PS10-70x80U-BL-QJ-D25	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	0150-5760
		PS10-70x80U-BL-QJ-D25S	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	0150-4600a
		PS10-70x80U-BL-QJ-D26	Stator 3x400VAC, A/B Encoder 1µm, PTC single ended	on request
		PS10-70x80U-BL-QJ-D34	Stator 3x400VAC, BiSS-C, Pt1000 dual	0150-4870
→	Slider	PL10-28x490/440	Slider for P10-70 'standard'	0150-2195

HM10-70x80/470


Linearmodul 70x80 mit 470 mm Hub

→	H-Guide	H10-70x80/470	H-Guide for P10-70x80, Stroke max. 470 mm	0150-5408
→	Stator	PS10-70x80U-BL-QJ	Stator 3x400VAC, LinMot Encoder	0150-1291
		PS10-70x80U-BL-QJ-D04	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, Pt1000 dual	0150-4260
		PS10-70x80U-BL-QJ-D05	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, PTC dual	0150-4605
		PS10-70x80U-BL-QJ-D08	Stator 3x400VAC, Sin/Cos Encoder 1Vpp, KTY dual	0150-4510
		PS10-70x80U-BL-QJ-D24	Stator 3x400VAC, A/B Encoder 1µm, Pt1000 dual	0150-4130
		PS10-70x80U-BL-QJ-D24S	Stator 3x400VAC, A/B Encoder 5µm, Pt1000 dual	0150-4595
		PS10-70x80U-BL-QJ-D25	Stator 3x400VAC, A/B Encoder 1µm, PTC dual	0150-5760
		PS10-70x80U-BL-QJ-D25S	Stator 3x400VAC, A/B Encoder 5µm, PTC dual	0150-4600a
		PS10-70x80U-BL-QJ-D26	Stator 3x400VAC, A/B Encoder 1µm, PTC single ended	on request
		PS10-70x80U-BL-QJ-D34	Stator 3x400VAC, BiSS-C, Pt1000 dual	0150-4870
→	Slider	PL10-28x690/640	Slider for P10-70 'standard'	0150-2196

Accessories

→	Fan	HV01-37/48	Fan cooling for H01-37 & -48 H-Guides	0150-5051
---	-----	------------	---------------------------------------	---------------------------

Motor Cable




C1450




E1400

B Connector MC10-B/m




Power Trailing Chain Cable KPS



Encoder Trailing Chain Cable KSS

Q Connector MC10-Q/f




P10-70x80U


D15 Connector MC01-D15/f

J Connector MC10-J/f

L Connector MC10-L/m




Power Trailing Chain Cable KPS



Encoder Trailing Chain Cable KSS

Q Connector MC10-Q/f



P10-70x80U

D15 Connector MC01-D15/f

J Connector MC10-J/f

ORDERING INFORMATION

POWER CABLES

Item	Description	Item-No.
KPS15-04-L/Q-3	Power Trailing Chain Cable E1400/P10-70, 3 m	0150-2266
KPS15-04-L/Q-5	Power Trailing Chain Cable E1400/P10-70, 5 m	0150-2261
KPS15-04-L/Q-8	Power Trailing Chain Cable E1400/P10-70, 8 m	0150-2267
KPS15-04-L/Q-12	Power Trailing Chain Cable E1400/P10-70, 12 m	0150-2268
KPS15-04-L/Q-	Power Trailing Chain Cable L/Q-, Custom length	0150-3388
KPS15-04-B/Q-3	Power Trailing Chain Cable C1400/P10-70, 3 m	0150-3660
KPS15-04-B/Q-5	Power Trailing Chain Cable C1400/P10-70, 5 m	0150-3661
KPS15-04-B/Q-8	Power Trailing Chain Cable C1400/P10-70, 8 m	0150-3662
KPS15-04-B/Q-12	Power Trailing Chain Cable C1400/P10-70, 12 m	0150-3663
KPS15-04-B/Q-	Power Trailing Chain Cable B/Q-, Custom length	0150-3608

ENCODER CABLES

Item	Description	Item-No.
KSS05-02/08-D15/J-3	Encoder Trailing Chain Cable D15/J, 3 m	0150-2263
KSS05-02/08-D15/J-5	Encoder Trailing Chain Cable D15/J, 5 m	0150-2262
KSS05-02/08-D15/J-8	Encoder Trailing Chain Cable D15/J, 8 m	0150-2264
KSS05-02/08-D15/J-12	Encoder Trailing Chain Cable D15/J, 12 m	0150-2265
KSS05-02/08-D15(f)-45°/J-	Encoder Trailing Chain Cable D15/J-, Custom length	0150-3389


EXTENSION CABLES

Item	Description	Item-No.
KPS15-04-Q/Q-	Power Trailing Chain Cable Q/Q-, Custom length	0150-3414
KSS05-02/08-J/J-	Encoder Trailing Chain Cable J/J-, Custom length	0150-3415

CONNECTORS

Item	Description	Item-No.
MC10-L/m	Connector Power E1400/X2	0150-3382
MC01-D15/f	Motor Connector D15 (f)	0150-3136
MC10-Q/f	Connector Power PS10-70	0150-2268
MC10-J/f	Connector Encoder PS10-70	0150-2269

Motor Cables for 3rd Party Drives

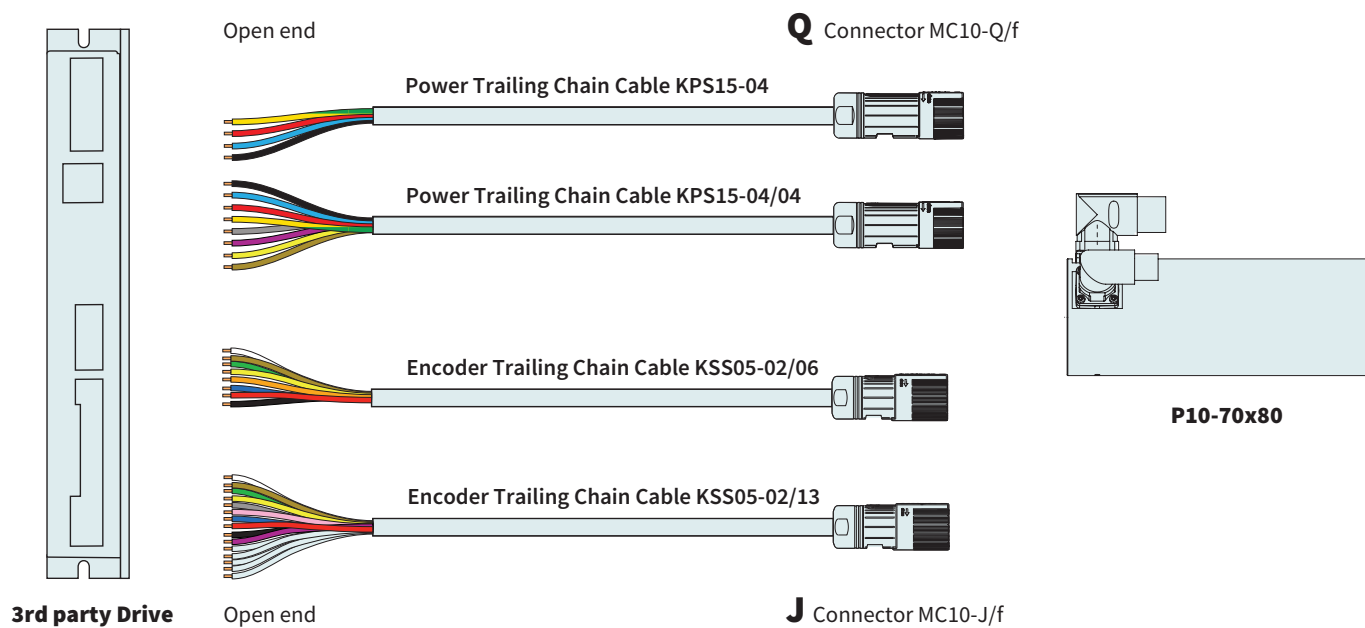

ORDER OVERVIEW							
Motor-Interface	Power Cable		Encoder Cable				
		TempFeedback		TempFeedback	Hallswitch Signals	Reference Signal	PosFeedback
D04 / D05 / D08	KPS15-04-_/Q-...	---	KSS05-02/13-_/J-...	Pt1000 / PTC / KTY	Hall U/V/W	Ref	Sin/Cos
	KPS15-04/04-_/Q-...	Pt1000 / PTC / KTY	KSS05-02/06-_/J-...	---	---	---	
D24(S) / D25(S) / D26	KPS15-04-_/Q-...	---	KSS05-02/13-_/J-...	Pt1000 / PTC	Hall U/V/W	Ref	AB 1 µm (5 µm)
	KPS15-04/04-_/Q-...	Pt1000 / PTC	KSS05-02/06-_/J-...	---	---	---	
D34	KPS15-04-_/Q-...	---	KSS05-02/13-_/J-...	Pt1000	Hall U/V/W	Ref	BiSS-C
	KPS15-04/04-_/Q-...	Pt1000					

ORDERING INFORMATION

POWER CABLES

Item	Description	Item-No.
KPS15-04-.../Q-10	Power Trailing Chain Cable .../Q, 10 m for Dxx	0150-2376
KPS15-04-./Q-	Power Trailing Chain Cable .../Q, für Dxx, Custom length	0150-3491
KPS15-04	Power Trailing Chain Cable P10-70 (per m)	0150-2257
KPS15-04/04.../Q-10	Power Trailing Chain Cable .../Q, 10 m for Dxx	0150-3654
KPS15-04/04-./Q-	Power Trailing Chain Cable .../Q, für Dxx, Custom length	0150-3579
KPS15-04/04	Power Trailing Chain Cable P10-...-Dxx (per m)	0150-2269

ENCODER CABLES

Item	Description	Item-No.
KSS05-02/13-.../J-10	Encoder Trailing Chain Cable .../J, 10 m for Dxx	0150-2377
KSS05-02/13-./J-	Encoder Trailing Chain Cable ./J, für Dxx, Custom length	0150-3492
KSS05-02/13	Encoder Trailing Chain Cable P10-...-Dxx (per m)	0150-2259

EXTENSION CABLES

Item	Description	Item-No.
KPS15-04-Q/Q-	Power Trailing Chain Cable Q/Q-, Custom length	0150-3414
KPS15-04/04-Q/Q-	Power Trailing Chain Cable Q/Q-, Custom length	0150-4214
KSS05-02/13-J/J-	Encoder Trailing Chain Cable J/J, für Dxx, Custom length	0150-3996

CONNECTORS

Item	Description	Item-No.
MC10-Q/f	Connector Power PS10-70	0150-2268
MC10-J/f	Connector Encoder PS10-70	0150-2269

MOTOR FLANGES



Item	Description	Item-No.
PF10-70x110	Flange for PS10-70x80	0150-2272



Item	Description	Item-No.
PF11-70x110-FC	Flange for PS10-70x80 fluid cooling	0150-2822

FIND MORE PRODUCT DETAILS IN THE CHAPTER "ACCESSORIES".

FANS



Item	Description	Item-No.
HV01-37/48	Fan cooling for H01-37/48 & PF02-37/48	0150-5051

FIND MORE PRODUCT DETAILS IN THE CHAPTER "ACCESSORIES".


SLIDER MOUNTING



Item	Description	Item-No.
PLF01-28	Fixed Bearing Set for 27/28 mm sliders	0150-3087
PLF01-28-SS	Fixed Bearing Set for 27/28 mm sliders, stainless steel	0150-3297
PLL01-28	Floating Bearing for 28 mm sliders	0150-3094
PLM01-28-MK	Mounting Kit for 28 mm sliders	0150-3095

FIND MORE PRODUCT DETAILS IN THE CHAPTER "ACCESSORIES".

BEARING KIT

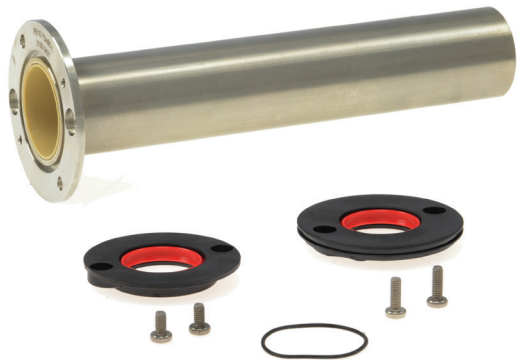

Item	Description	Item-No.
PB10-70x80-L	Bearing Kit for PS10-70x80	0150-3431

FIND MORE PRODUCT DETAILS IN THE CHAPTER "ACCESSORIES".


LUBRICANT RESERVOIR



Item	Description	Item-No.
PA10-70/28	Lubricant reservoir for PS10-70 with lubricating nipple	0150-3543

FIND MORE PRODUCT DETAILS IN THE CHAPTER "ACCESSORIES".

EXTERNAL POSITION SENSORS

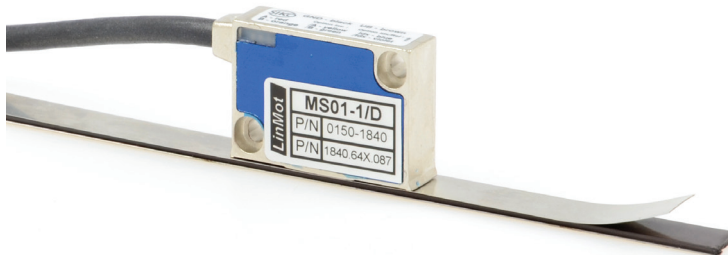

Item	Description	Item-No.
MS01-1/D	Linear Encoder 1µm, A/B (for incremental strip)	0150-1840
MB01-1000	Magnetic incremental strip for MS01-1/D, per cm	0150-1963
KS025-D15/D-Encoder	Encoder Cable (Length in m)	0150-3168

FIND MORE PRODUCT DETAILS IN THE CHAPTER "ACCESSORIES".



Item	Description	Item-No.
MS01-1/D-SSI	Linear Encoder 1µm, A/B (for absolute strip)	0150-2095
MB01-1000-ABS	Magnetic absolute strip for MS01-1/D-SSI (per cm)	0150-2096
EC01-ABS/ENC-12-S	MS01-1/D-SSI Encoder connector straight	0150-3616
KSS01-12-D15/ABS-ENC	Special cable for MS01-1/D-SSI on C1100/C1200/C1400/E1200/E1400 Drives	0150-3652

FIND MORE PRODUCT DETAILS IN THE CHAPTER "ACCESSORIES".