
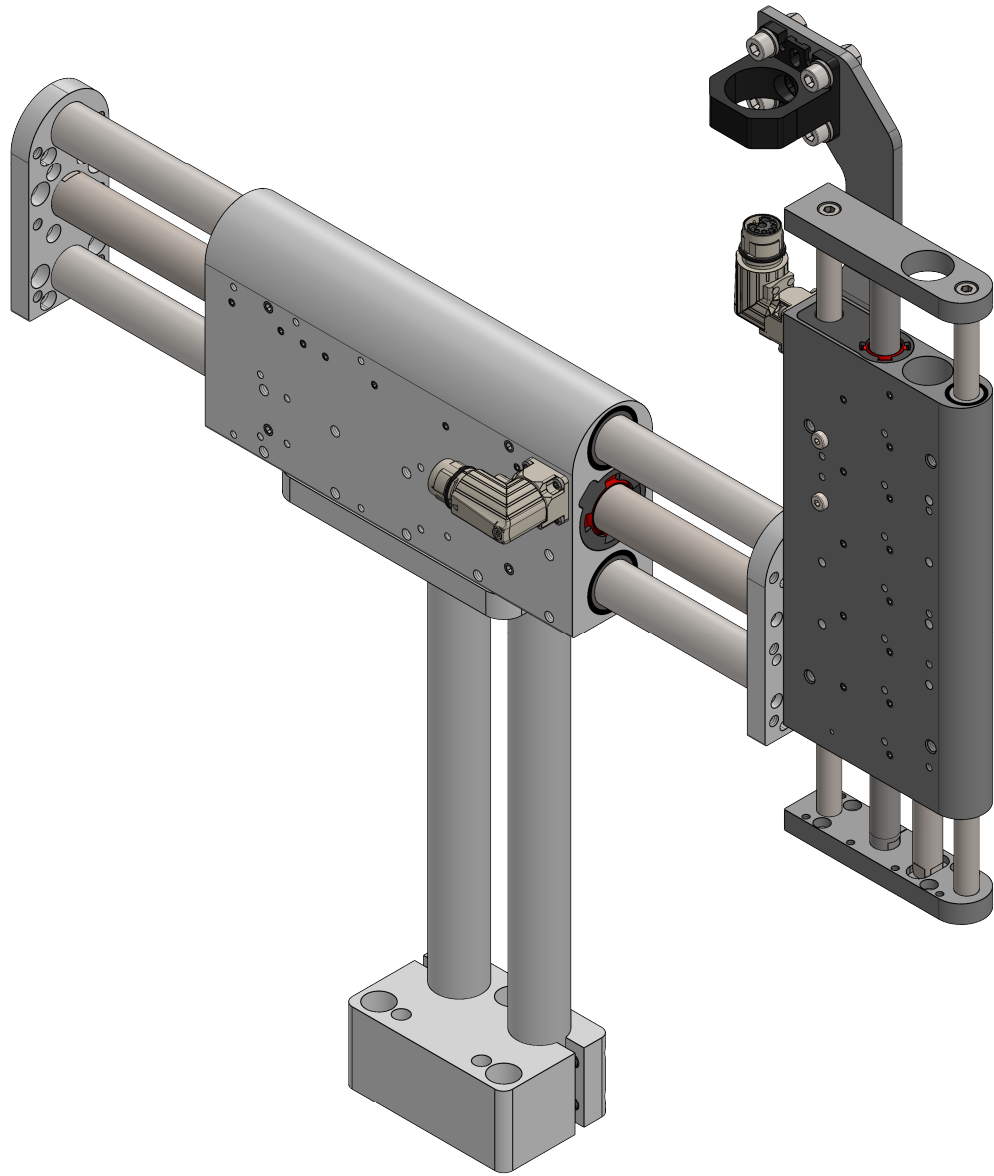



The copyright to this document, which is personally entrusted to the recipient, remains with our company. Without our written permission, the document may not be copied nor reproduced nor communicated or made accessible to third parties without our written permission.

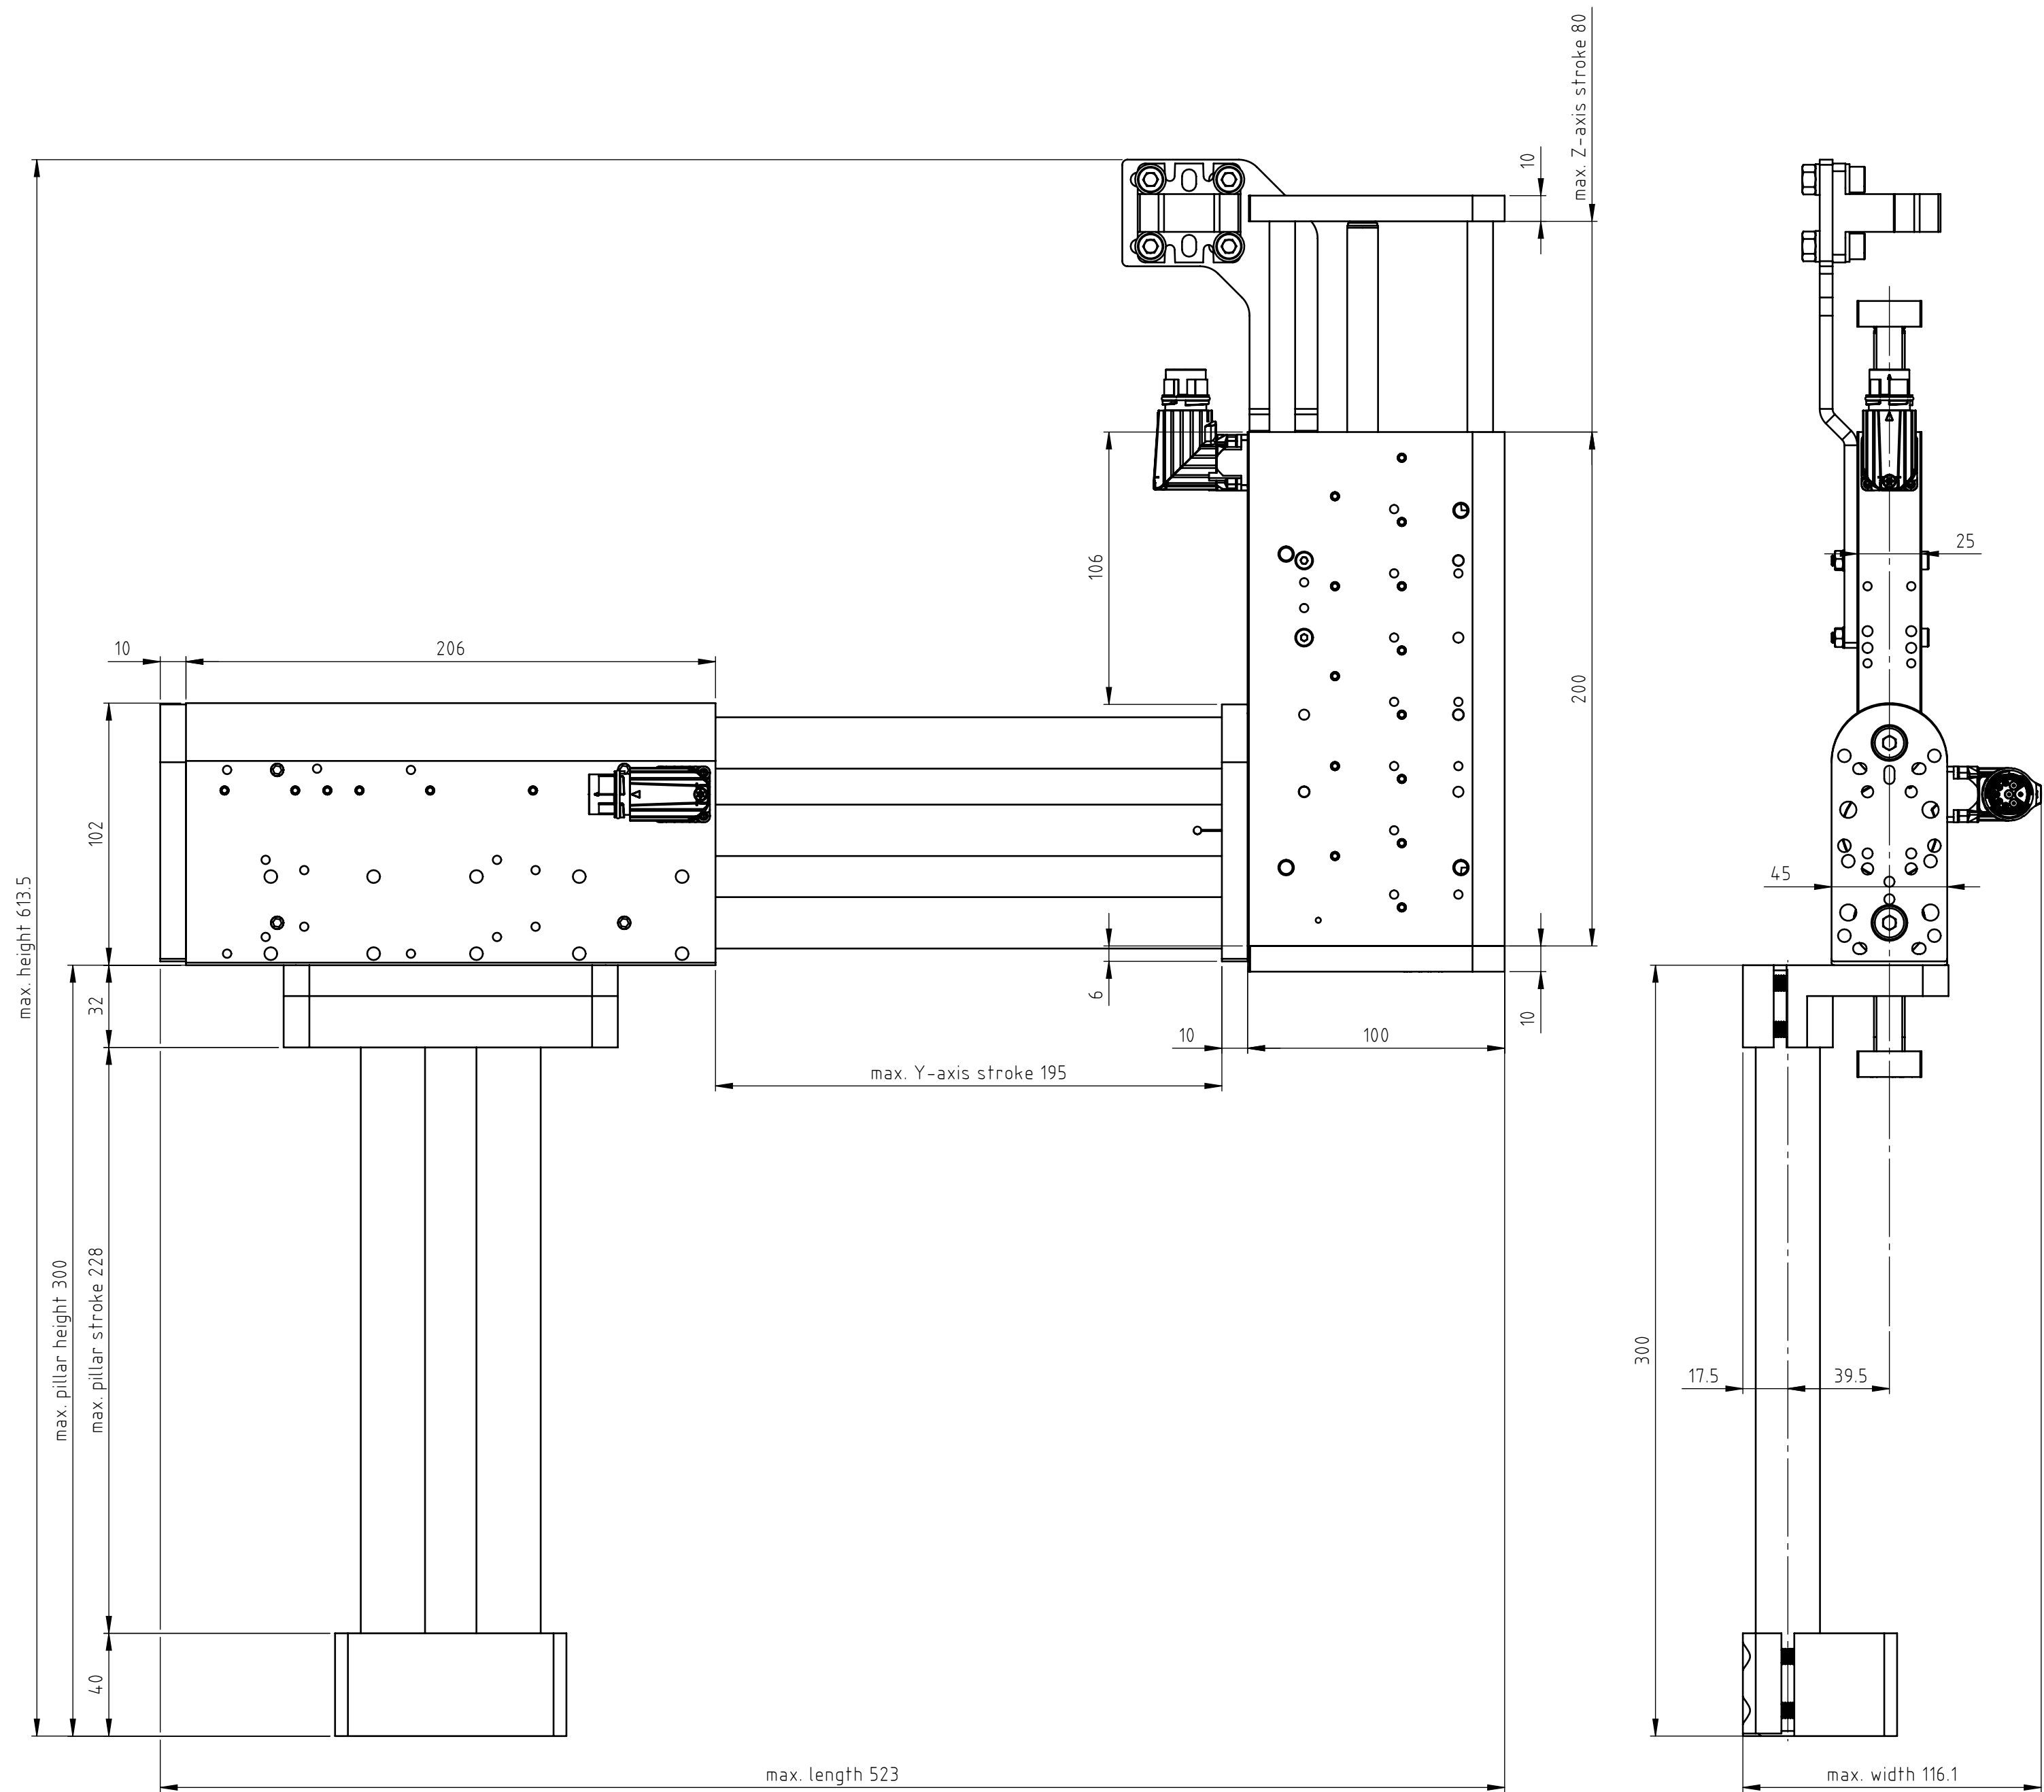

A	Document created	14.11.2024	JB	FH
Rev.	Change	Date	Author	Appr.

General tolerance DIN ISO 2768 - mK	Created by J.-E. Beekhuis	Status 28.04.2025/jb	Material	
LinMot®	File name 0380-0004_PP03_195-37x120F_80-23x160H-MS11_MT02_TC01	☐ Safety Rel. Weight (g) ☐ UL-Rel.		
NTI AG LinMot & MagSpring Bodenaeckerstrasse 2 CH-8957 Spreitenbach	Title, additional title PP03_195-37x120F_ 80-23x160H-MS11_MT02_TC01 Pick&Place / DM01-37 & DM03-23		Document type Assembly drawing Drawing number / Index 0380-0004A	
Template type: SW2020 Version: V1-1 SW_A2_hori_Sheet_format_V1-1	Art.No: 0300-0004		Scale 1:2	Sheet 1 / 3 A2

The copyright to this document, which is personally entrusted to the recipient, remains with our company. Without our written permission, the document may not be copied nor reproduced nor communicated or made accessible to third parties without our written permission.

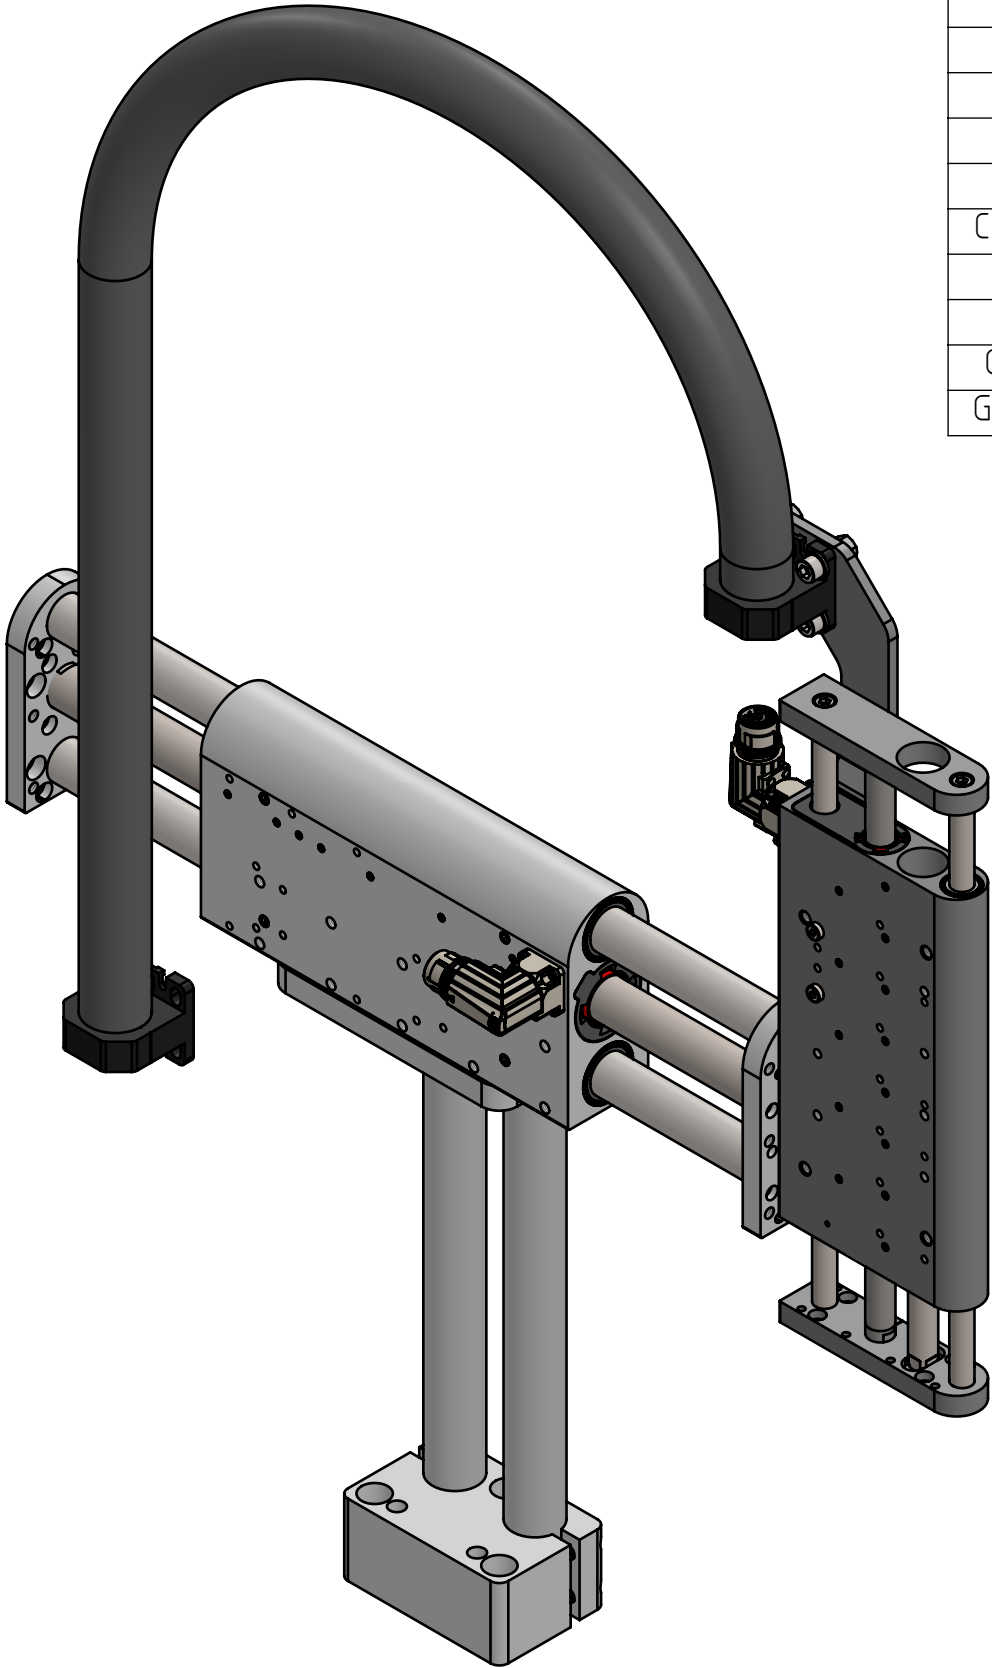

Stage type	PP03_195-37x120F_80-23x160H-MS11_MT02_TC01	
Motor type	Horizontal: 0150-4014 DM01-37x120F-HP-R-195	Vertical: 0150-6109 DM03-23x160H-XP-R-80_CS10_MS11
Stroke	210	80
Max. Force@48VDC [N]	255	137
Max. Force@72VDC [N]	255	137
Position resolution [mm]	0.005	0.002
Repeatability [mm]	±0.05	±0.05
Max. acceleration [m/s2]	< 50	< 50
Max. Velocity@48VDC [m/s]	2.5	4.9
Max. Velocity@72VDC [m/s]	3.8	7.3
Deviation	see datasheet	see datasheet
Moving mass [kg]	2.200	0.800
Module mass [kg]	4.180	2.140
Pillar mass [kg]	3.200	
Cable weight [kg/km]	83.0	
Cable tube weight [kg/m]	0.084	
Max. payload	see datasheet	see datasheet
Grease type - Motor	0150-1954 / 0150-1955 LU02	
Grease type - Bearings	0260-0061 SKF LGFP 2	
Grease type - MagSpring	0150-1954 / 0150-1955 LU02	

Accessories		
Stage type	PP03_195-37x120F_80-23x160H-MS11_MT02_TC01	
Motor type	Horizontal: 0150-4014 DM01-37x120F-HP-R-195	Vertical: 0150-6109 DM03-23x160H-XP-R-80_CS10_MS11
Safety	Available: not chosen	Not available
Clean room	Available: not chosen	Not available
External sensor	Available: not chosen	Not available
Cover	Not available	Not available
Cable guide	Chosen: 0150-6704 PP03_TC01	
Pillar system	Chosen: 0150-6831 PP03_MT02	
Force sensor	Available: not chosen	Available: not chosen
Fan Kit	Available: not chosen	Not available

A	Document created	14.11.2024	JB	FH
Rev.	Change	Date	Author	Appr.

General tolerance DIN ISO 2768 - mK	Created by J.-E. Beekhuis	Status 28.04.2025/jb	Material	
NTI AG LinMot & MagSpring Bodenaeckerstrasse 2 CH-8957 Spreitenbach	0380-0004_PP03_195-37x120F_80-23x160H-MS11_MT02_TC01		☐ Safety Rel.	Weight (g)
			☐ UL-Rel.	
	Title, additional title PP03_195-37x120F_ 80-23x160H-MS11_MT02_TC01 Pick&Place / DM01-37 & DM03-23 Art.No.: 0300-0004		Document type Assembly drawing Drawing number / Index 0380-0004A	
Template type: SW2020 Version: V1-1 SW_A3_hori_Sheet_format_V1-1	Scale 1:3		Sheet 2 / 3	A3

The copyright to this document, which is personally entrusted to the recipient, remains with our company. Without our written permission, the document may not be copied nor reproduced nor communicated or made accessible to third parties without our written permission.

