

Installation Guide Servo Drive

ENG

F1050-DS-UC-0S

**Important Notice:**

Please note that we use machine translation to provide documents in your local language. It is possible that not all texts will be translated correctly. If you have any questions or discrepancies regarding the accuracy of the information in the translated version, please read the original English version (0185-1186-E).

Please visit <http://www.linmot.com> to check for the latest version of this document!

Content

1	General Information	3
1.1	Introduction	3
1.2	Explanation of Symbols	3
1.3	Qualified Personnel.....	3
1.4	Liability.....	3
1.5	Copyright	3
2	Safety Instructions.....	4
3	System Overview.....	6
4	Interfaces	7
5	Functionality.....	8
6	Software	8
7	Power Supply and Grounding.....	9
8	Description of the connectors / Interfaces.....	10
8.1	Protective Earth	10
8.2	X1	10
8.3	X2/X3 Motor-Connection.....	11
8.4	X4	12
8.5	X17 – X18	12
8.6	X15	12
8.7	S14 Reset Button.....	12
8.8	S4 CAN Termination	12
8.9	System LEDs	13
8.10	RT Bus LEDs	13
9	System LED Blink Codes.....	13
10	Physical Dimension	14
11	Power Supply Requirements	15
11.1	Motor-Power Supply.....	15
11.2	Signal-Power Supply.....	15
12	Safety notes for the installation according to UL 61800-5-1	15
13	Regeneration	15
14	Ordering Information	16
14.1	Drives.....	16
14.2	Accessories.....	16
15	International Certifications.....	16
15.1	IECEE CB SCHEME – CB Test certificate.....	17
15.2	Summary of compliance with national differences	19
15.3	EU Declaration of Conformity CE Marking	20
15.4	UK Declaration of Conformity UKCA Marking	21
15.5	UL / CSA Listing.....	22
16	Version history.....	26
17	Contact information.....	27

1 General Information

1.1 Introduction

This manual includes instructions for the assembly, installation, maintenance, transport, and storage of the servo drives. The document is intended for electricians, mechanics, service technicians, and warehouse staff. Read this manual before using the product and always observe the general safety instructions and those in the relevant section. Keep these operating instructions in an accessible place and make them available to the personnel assigned.

1.2 Explanation of Symbols



Triangular warning signs warn of danger.



Round command symbols tell what to do.

1.3 Qualified Personnel

All work such as installation, commissioning, operation, and service of the product may only be carried out by qualified personnel. The personnel must have the necessary qualifications for the corresponding activity and be familiar with the installation, commissioning, operation, and service of the product. The manual and in particular the safety instructions must be carefully read, understood, and observed.

1.4 Liability

NTI AG (as manufacturer of LinMot and MagSpring products) excludes all liability for damages and expenses caused by incorrect use of the products. This also applies to false applications, which are caused by NTI AG's own data and notes, for example during sales, support or application activities. It is the responsibility of the user to check the data and information provided by NTI AG for correct applicability in terms of safety. In addition, the entire responsibility for safety-related product functionality lies exclusively with the user. Product warranties are void if products are used with stators, sliders, servo drives, or cables not manufactured by NTI AG unless such use was specifically approved by NTI AG.

NTI AG's warranty is limited to repair or replacement as stated in our standard warranty policy as described in our "terms and conditions" previously supplied to the purchaser of our equipment (please request a copy of same if not otherwise available). Further reference is made to our general terms and conditions.

1.5 Copyright

This work is protected by copyright.

Under the copyright laws, this publication may not be reproduced or transmitted in any form, electronic or mechanical, including photocopying, recording, microfilm, storing in an information retrieval system, not even for training purposes, or translating, in whole or in part, without the prior written consent of NTI AG.

LinMot® and MagSpring® are registered trademarks of NTI AG.

2 Safety Instructions



For your personal safety

Disregarding the following safety measures can lead to severe injury to persons and damage to material:

- Only use the product as directed.
- Never commission the product in the event of visible damage.
- Never commission the product before assembly has been completed.
- Do not carry out any technical changes on the product.
- Only use the accessories approved for the product.
- Only use original spare parts from LinMot.
- Observe all regulations for the prevention of accidents, directives and laws applicable on site.
- Transport, installation, commissioning, and maintenance work must only be carried out by qualified personnel.
- Observe IEC 364 and CENELEC HD 384 or DIN VDE 0100 and IEC report 664 or DIN VDE 0110 and all national regulations for the prevention of accidents.
- According to the basic safety information, qualified, skilled personnel are persons who are familiar with the assembly, installation, commissioning, and operation of the product and who have the qualifications necessary for their occupation.
- Observe all specifications in this documentation.
- This is the condition for safe and trouble-free operation and the achievement of the specified product features.
- The procedural notes and circuit details described in this documentation are only proposals. It is up to the user to check whether they can be transferred to the applications. NTI AG / LinMot does not accept any liability for the suitability of the procedures and circuit proposals described.
- LinMot servo drives, and the accessory components can include live and moving parts (depending on their type of protection) during operation. Surfaces can be hot.
- Non-authorized removal of the required cover, inappropriate use, incorrect installation, or operation create the risk of severe injury to persons or damage to material assets.
- For more information, please see the documentation.
- High amounts of energy are produced in the drive. Therefore, it is required to wear personal protective equipment (body protection, headgear, eye protection, hand guard).



Application as directed

- Drives are components, which are designed for installation in electrical systems or machines. They are not to be used as domestic appliances, but only for industrial purposes according to EN 61000-3-2.
- When drives are installed into machines, commissioning (i.e., starting the operation as directed) is prohibited until it is proven that the machine complies with the regulations of the EC Directive 2006/42/EG (Machinery Directive); EN 60204 must be observed.
- Commissioning (i.e., starting of the operation as directed) is only allowed when there is compliance with the EMC Directive (2014/30/EU).
- The technical data and supply conditions can be obtained from the nameplate and the documentation. They must be strictly observed.



Transport, storage

- Please observe the notes on transport, storage, and appropriate handling.
- Observe the climatic conditions according to the technical data.

**Installation**

- The drives must be installed and cooled according to the instructions given in the corresponding documentation.
- The ambient air must not exceed the degree of pollution 2 according to EN 61800-5-1.
- Ensure proper handling and avoid excessive mechanical stress. Do not bend any components and do not change any insulation distances during transport or handling. Do not touch any electronic components and contacts.
- Drives contain electrostatic sensitive devices, which can easily be damaged by inappropriate handling. Do not damage or destroy any electrical components since this might endanger your health!

**Electrical connection**

- When working on live drives, observe the applicable national regulations for the prevention of accidents.
- The electrical installation must be carried out according to the appropriate regulations (e.g. cable cross-sections, circuit breakers, fuses, PE connection). Additional information can be obtained from the documentation.
- This product can cause high-frequency interferences in non-industrial environments, which require measures for interference suppression.

**Operation**

- If necessary, systems including drives must be equipped with additional monitoring and protection devices according to the valid safety regulations (e.g. law on technical equipment, regulations for the prevention of accidents). The drives can be adapted to your application. Please observe the corresponding information given in the documentation.
- After the drive has been disconnected from the supply voltage, all live components and power connections must not be touched immediately because capacitors can still be charged. Please observe the corresponding stickers on the drive. All protection covers and doors must be shut during operation.

**Burn Hazard**

The heat sink (housing) of the drive can have an operating temperature of $> 80\text{ }^{\circ}\text{C}$: Contact with the heat sink results in burns.


**Caution - Risk of Electric Shock!**

- Before servicing, disconnect supply, wait 5 minutes and measure between PWR+ and PGND to be sure that the capacitors have discharged below 42 VDC.
- The power terminals Ph1+, Ph1-, Ph2+, Ph2- and PWR+ remain live for at least 5 minutes after disconnecting from the power supplies.

**Grounding**


All metal parts that are exposed to contact during any user operation or servicing and likely to become energized shall be reliably connected to the means for grounding.

3 System Overview

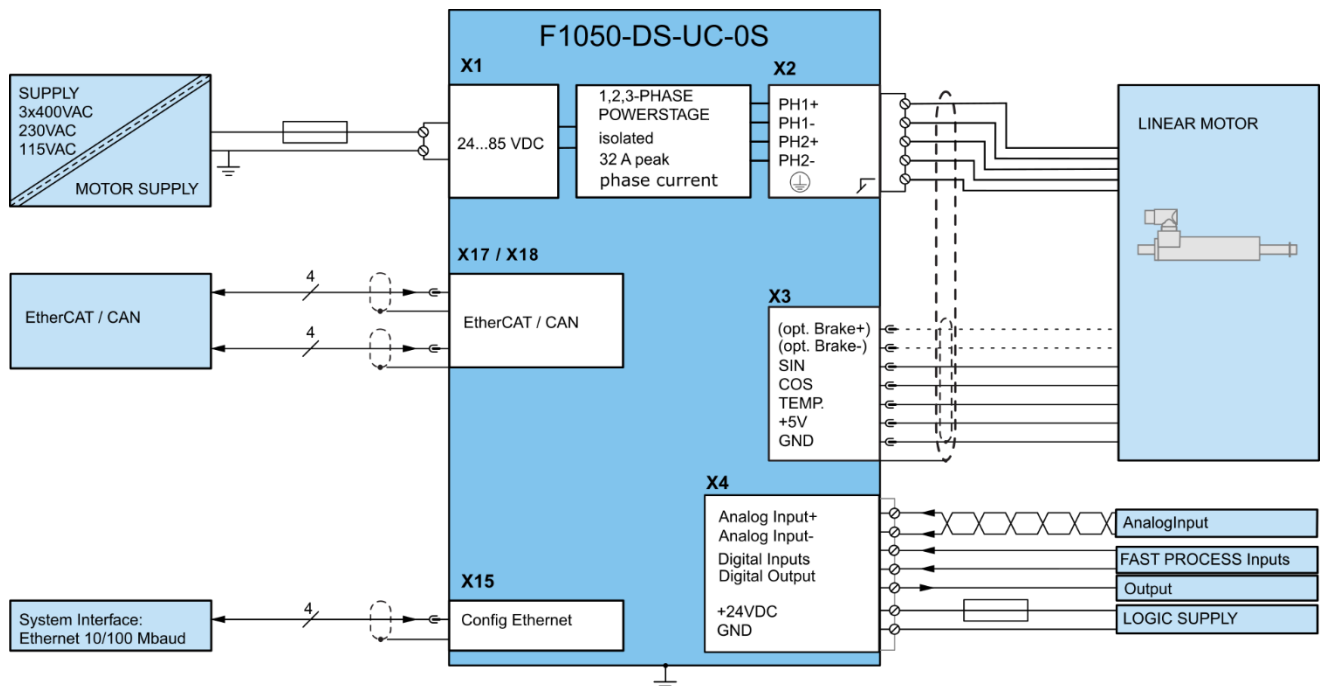

Typical servo system F1050-DS-UC-0S: Servo drive, motor, and power supply

4 Interfaces

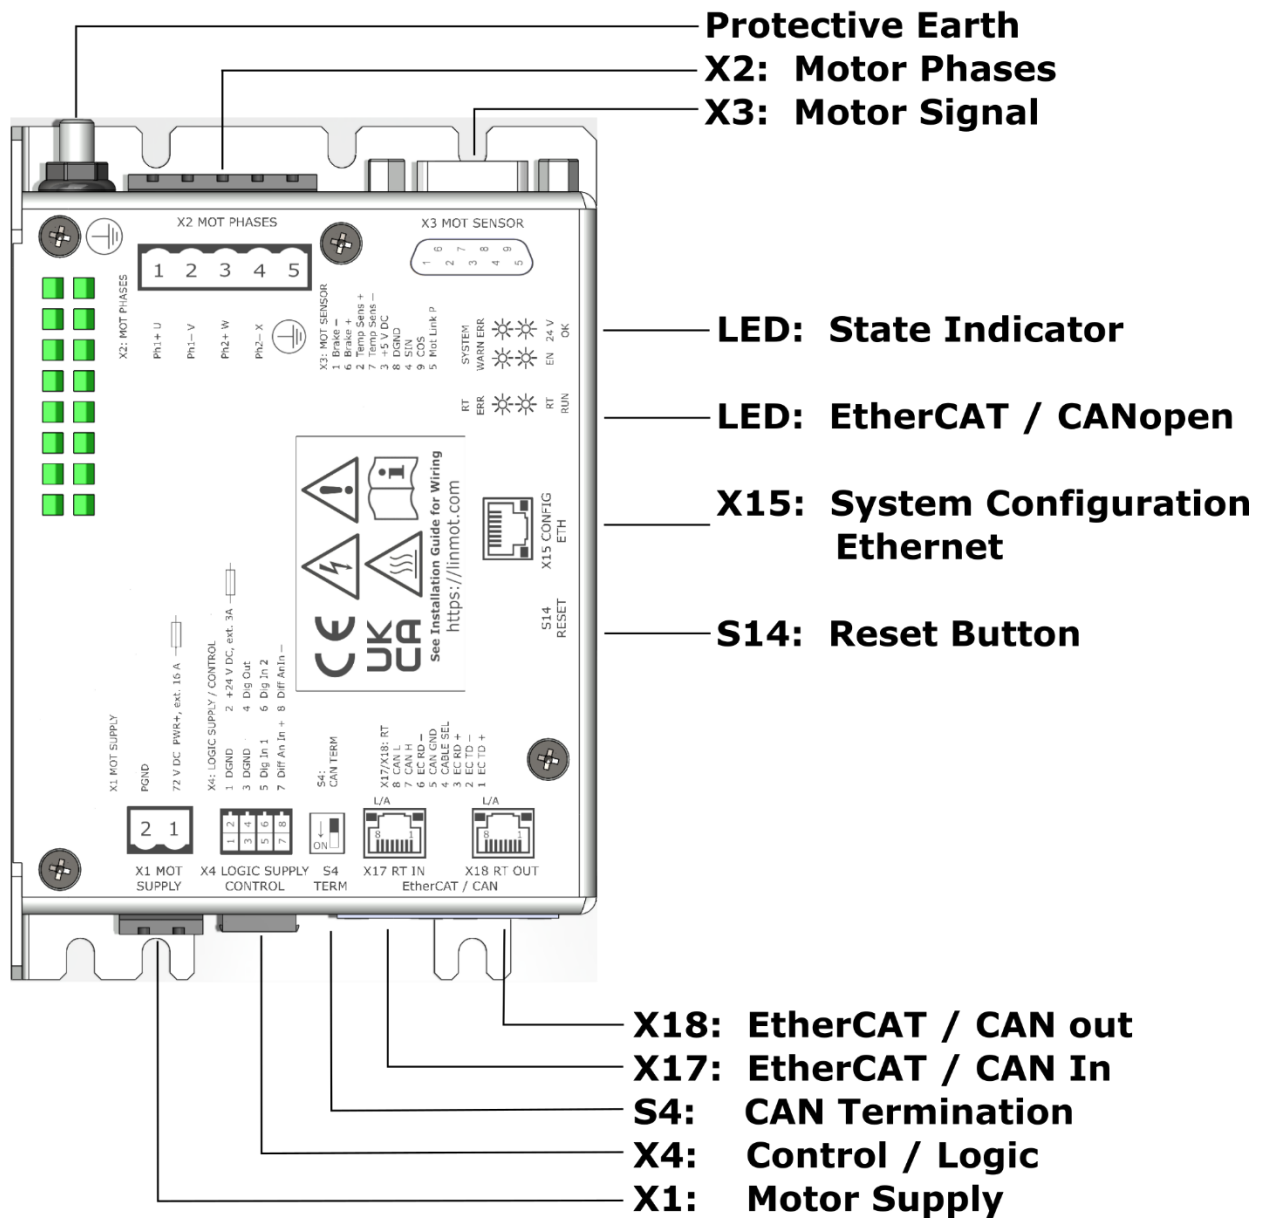

5 Functionality


	F1050-DS-UC-0S
Supply Voltage	
Motor Supply 72 VDC (24...85 VDC)	●
Logic Supply 24 VDC (22...26 VDC)	●
Motor Phase Current	
32 A peak (0-599 Hz)	●
6 A rms	●
LinMot P0x- and PR0x- Motors, LinMot EC02 Motors	●
Plug and Play (PnP) Auto Configuration	●
Phases short-circuit on disable- and error-states*	●
Command Interface	
EtherCAT CiA402 (preinstalled)	●
CANopen up to 1MBaud (CANopen FW must be installed)	○
Programmable Motion Profiles (Curves)	
Up to 50 Motion Profiles/ Up to 8110 Curve Points	●
Programmable Command Table	
Command Table with up to 255 entries	●
Configuration Interface	
Ethernet (X15), 100BASE-TX, IPV4 and IPV6	●
Ethernet (EoE) (only if EtherCAT is used)	●
Integrated Safety Functions	
No integrated Safety	●
Control Frequencies	
PWM	16 kHz
Current controller	8 kHz
Position controller	4 kHz
Interface DS (EtherCAT, CANopen)	4 kHz

* This feature greatly improves the system behavior on error states, because the motor will be braked by the eddy current.

6 Software

The configuration software LinMot-Talk is free of charge and can be downloaded from the LinMot homepage.

7 Power Supply and Grounding

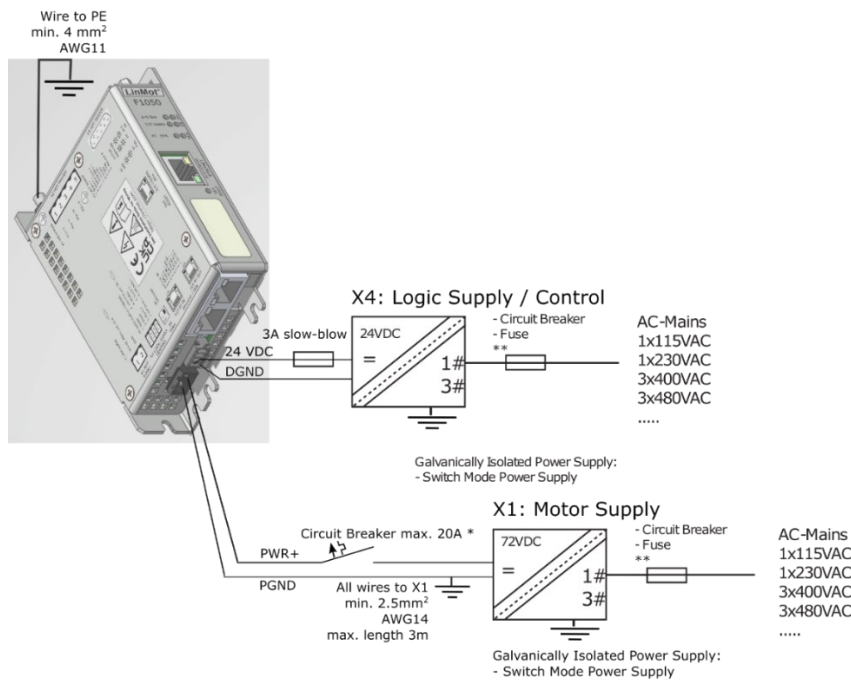

* External Circuit Breaker: max. 20 A / min. 100 VDC / C-Trip / 5 kA rms SCCR
 ** See installation guide of the power supply for more details



To ensure a safe and error free operation, and to avoid severe damage to system components, **all system components must be well grounded to protective earth PE**. This includes both LinMot and all other control system components on the same ground bus.



Each system component should be tied directly to the ground bus (**star pattern**). Daisy chaining from component to component is forbidden. (LinMot motors are properly grounded through their power cables when connected to LinMot drives.)



The motor supply (72 VDC) should be kept as short as possible (3m is the absolute maximum). When multiple drives are connected to one supply, the wiring must be done in a star pattern. **PGND must be connected to protective earth near the power supply (star point)**. The supply must not be daisy chained (this is not possible because the minimum wire diameter is as well the maximum which can be connected to the plug).



Power supply connectors must not be connected or disconnected while DC voltage is present. Do not disconnect system components until all LinMot drive LEDs have turned off. (Capacitors in the power supply may not be fully discharged for several minutes after input voltage has been disconnected). Failure to observe these precautions may result in severe damage to electronic components in LinMot motors and/or drives.




Do not switch Power Supply DC Voltage. All power supply switching, and E-Stop breaks should be done to the AC supply voltage of the power supply. Failure to observe these precautions may result in severe damage to the drive.

8 Description of the connectors / Interfaces

8.1 Protective Earth

Protective Earth	Protective Earth
	• M5, use min. 4 mm² (AWG11) • Tightening torque: 2 Nm (18 lbin)


8.2 X1

X1	Motor Supply
	PWR+ PGND
	Motor Supply: 72 VDC nominal (24...85 VDC) Absolute max. Rating: 72 VDC +20%. External Circuit Breaker: 20 A / min. 100 VDC / C-Trip / 5 kA rms SCCR PGND has to be connected to Protective Earth (near the powersupply). If motor supply voltage exceeds 90 VDC, the drive will go into error state. • Use 60/75 °C copper conductors only • Conductor cross-section: 2,5 mm² (AWG14) max length 3m • Wire stripping length: 11 mm Terminal Kit X1/X4, for F1050 (0150-7277) or Terminal Kit X1, Motor PWR 72 VDC Input (0150-7274) must be used

8.3 X2/X3 Motor-Connection

X2	Motor Phases				
	PH1+	LinMot linear Motor:	1+	Red	LinMot EC02 Motor:
	PH1-	Motor Phase	1-	Pink	Motor Phase U Red
	PH2+	Motor Phase	2+	Blue	Motor Phase V Pink
	PH2-	Motor Phase	2-	Grey	Motor Phase W Blue
		Protective Earth			Do not connect
					Protective Earth
- Use 60/75 °C copper conductors only - Conductor cross-section: 0.5 – 2.5 mm² (depends on Motor current) / AWG 21 -14					

X3	Motor Sensor / Brake				
	1	LinMot linear Motor:	Do not connect	LinMot EC02 Motor:	Brake – (with brake option)
	6	Do not connect	Do not connect	Brake + (with brake option)	Do not connect
	2	Do not connect	Do not connect	Do not connect	Do not connect
	7	Do not connect	Do not connect	Do not connect	Do not connect
	3	+5 VDC	+5 VDC	+5 V DC	+5 V DC
	8	DGND	DGND	DGND	DGND
	4	SIN	SIN	SIN	SIN
DSUB-9 (f)	9	COS	COS	COS	COS
	5	MotLink P+	MotLink P+	MotLink P	MotLink P
	Shield	Shield	Shield	Shield	Shield
Note: - Use +5 VDC (X3.3) and DGND (X3.8) only for motor internal hall sensor supply (max. 100 mA). - Max. motor cable length: 50 m for LinMot Px motors. Please check the restrictions of motor, encoder and cable as well. - Brake+: 24 V / max. 500 mA, peak 1.4 A (will shut down if exceeded) the other terminal must be wired to Brake- (X3.1) Caution: - Do NOT connect DGND (X3.8) to ground or earth!					

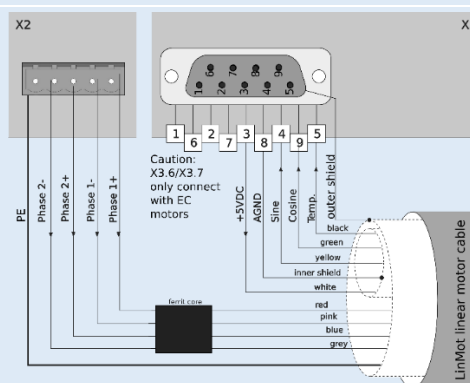

Important Notes:

Use Y-style motor cables only (for example K15-Y/C)! A W-style cable has a different shielding, so it cannot be modified to a Y-style cable!

8.4 X4

X4	Logic Supply / IO Connection			
	1	DGND	Power Supply	Logic Ground
	2	+24VDC	Power Supply	Logic Supply 22-26 VDC
	3	DGND	X4.3	Logic Ground for Configurable digital Output
	4	DigOut	X4.4	Configurable digital Output
	5	DigIn 1	X4.5	Configurable digital Input 1
	6	DigIn 2	X4.6	Configurable digital Input 2
	7	AnIn+	X4.7	Configurable differential analog Input (with X4.8)
	8	AnIn-	X4.8	Configurable differential analog Input (with X4.7)
	Digital inputs (X4.5 ... X4.6): 24 VDC / 5 mA (Low Level: -0.5 to 5 VDC, High Level: 15 to 30 VDC) Digital outputs (X4.4): 24 VDC / max. 100 mA, peak 1.4 A (will shut down if exceeded) The output is high side switching with integrated pull-down (1k7 to DGND) Analog inputs: 12-bit A/D converted X4.7/X4.8: +/- 10 V, input resistance 28.0 kΩ, common mode range: -5..+10 V to DGND, Mating connector: - The mating plug (push-in spring) is delivered with the drive. - Use 60/75 °C copper conductors only - Conductor cross-section 0.5 mm² - Stripping length: 7 mm Important notes: The 24 VDC logic supply for the control circuit (X4.2) must be protected with an external fuse (3 A slow blow) Terminal Kit X1/X4, for F1050 (0150-7277) or Terminal Kit X4, 24 VDC & Logic for F1050 (0150-7275) must be used			

8.5 X17 – X18

X17 – X18		EtherCAT / CANopen	
 	X17 EtherCAT / CAN In	EtherCAT (preinstalled) or CANopen. Please refer to the according documentation.	
	X18 EtherCAT /CAN Out		
RJ-45			

8.6 X15

X15	System Config	
	X15	10 / 100 Mbit/s Ethernet RJ45
	RJ-45	

8.7 S14 Reset Button

S14	Reset Button
	Pressing the Reset Button at power up for 5 seconds, the firmware and parameters are reset, and the system will be in a recovery mode. After this, the firmware must be reinstalled. The reset button is recessed (2mm hole) and must be operated with a tool (e.g. paper clip).

8.8 S4 CAN Termination

S4	Reset Button
	CAN Termination / On or Off

8.9 System LEDs

LEDs	State Displays		
Error   24VOK Warn   EN  	Signal:	Color:	Description:
	24VOK	Green	24 VDC Logic Supply OK
	EN (enable)	Yellow	Motor Enabled / Error Code Low Nibble
	WARN	Yellow	Warning / Error Code High Nibble
	ERROR	Red	Error

8.10 RT Bus LEDs

RT Bus LEDs	RT Bus State Display		
Error   24VOK Warn   EN  	EtherCAT state	ERR (red)	RUN (green)


The blink codes are described in the corresponding interface manuals.

9 System LED Blink Codes

LED Blink Codes			
Error   24VOK Warn   EN  	ERROR	WARN	EN (enable)
	Description		
	OFF	Warning	Operation Enabled
	Normal Operation: Warnings and operation enabled are displayed.		
	ON	● ~2 Hz 0..15 x Error Code High Nibble	● ~2 Hz 0..15 x Error Code Low Nibble
	Error: The error code is shown by a blink code with "WARN" and "EN" The error byte is divided into low and high nibble (= 4 bit). "WARN" and "EN" are blinking together. The error can be acknowledged. (e.g.: WARN blinks 3x, EN blinks 2x; Error Code = 32h)		
	● ~2 Hz	● ~2 Hz 0..15 x Error Code High Nibble	● ~2 Hz 0..15 x Error Code Low Nibble
	Fatal Error: The error code is shown by a blink code with "WARN" and "EN". The error byte is divided into low and high nibble. "WARN" and "EN" are blinking together. Fatal errors can only be acknowledged by a reset or power cycle. (e.g.: WARN blinks 3x, EN blinks 2x; Error Code = 32h)		
	● ~4 Hz	● ~2 Hz 0..15 x Error Code High Nibble	● ~2 Hz 0..15 x Error Code Low Nibble
	System Error: Please reinstall firmware or contact support.		
	● ~0.5 Hz	● ~0.5 Hz	On
	Signal Supply 24V too low: The error and warn LEDs blink alternating if the signal supply +24 VDC (X4.2) is less than 18 VDC.		
	Off	○●●●	●○●●
	Plug&Play Communication Active: This sequence (Warn on, then En on, then both off, complete sequence of the 4 states ca. 1 s) signalizes the state when the plug and play parameters are being read from the motor.		
	○● ~4 Hz	●○ ~4 Hz	Off
	Waiting for Defaulting Parameters: When ID (S1, S2) is set to 0xFF, the drive starts up in a special mode and the Error and Warn LED blink alternating ~4 Hz. When the ID is set to 0x00, all parameters will be set to their default value. To leave this state, power down the drive and change the ID. Also see in the Usermanual_LinMot-Talk under chapter trouble shooting.		
	Off	○● ~2 Hz	○● ~2 Hz
	Defaulting Parameters Done: When the parameters have set to their default values (initiated via S1/S2 on power up) the Warn and EN LEDs blink together at 2 Hz. To leave this state, power down the drive. Also see in the Usermanual_LinMot-Talk under chapter trouble shooting.		

The meaning of the error codes can be found in the *Usermanual_MotionCtrl_Software_SG9* and the user manual of the installed interface software. These documents are provided together with LinMot-Talk configuration software and can be downloaded from www.linmot.com.

10 Physical Dimension

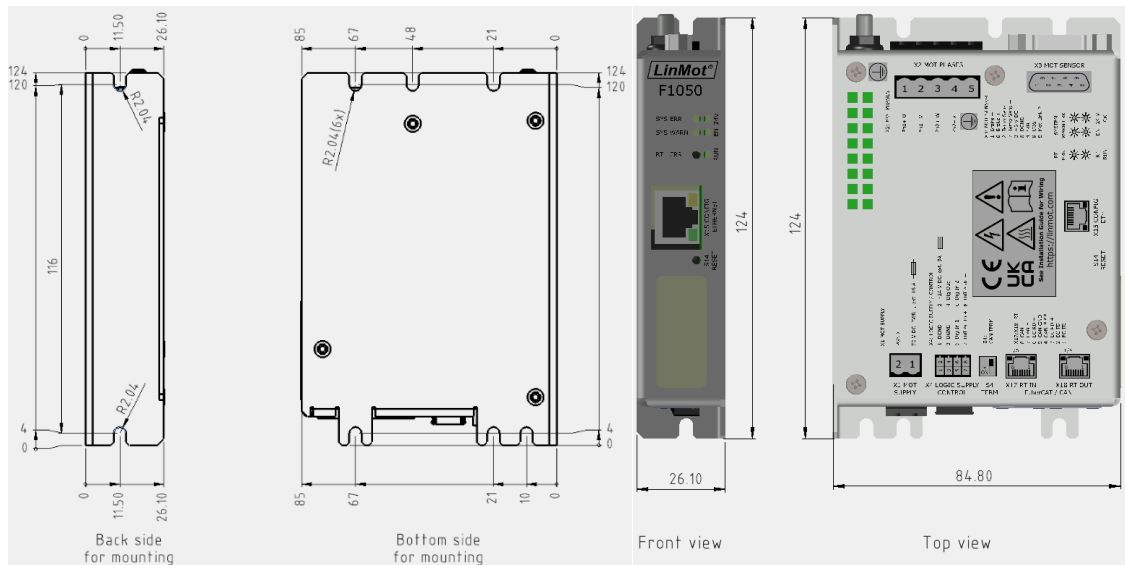

F1050-DS single axis drive		F1050-DS-UC-3S
Width	mm	26.1
Height	mm	124
Depth	mm	84.8
Weight	g	400
Mounting Screws		M4
Case, Degree of Protection	IP	20
Storage Temperature	°C	-25...40, maximum change 20 K/hour
Transport Temperature	°C	-20...70
Operating Temperature	°C	5...40 at rated data
Relative humidity		< 85% (non-condensing)
Air pressure	hPa	700...1060
Exposure to ionizing radiation		Not acceptable
Exposure to corrosive environment		Not acceptable
Pollution	IEC/EN 60664-1	Pollution degree 2
Shock resistance (30ms)	g	5
Vibration resistance (10-150Hz)	g	1
Max. Case Temperature	°C	70
Max. Power Dissipation	W	30
Mounting place		In the control cabinet (at least IP54)
Mounting position		Vertical
Distance between Drives	mm (in)	Without Power Derating *: 20 (0.8) horizontal / 50 (2) vertical With Power Derating *: 5 (0.2) horizontal / 20 (0.8) vertical

* The derating is depending on the situation in the cabinet. The temperature of the drive should be checked under full load (the temperature should be stable, which may take an hour or more). This allows to verify that enough margin is there if the cabinet goes to the maximum allowable temperature of 40° C. For example, if the drive temperature reaches 45° C and the cabinet temperature is 30° C, this would result in a drive temperature of about 55° C at a cabinet temperature of 40° C. The warning level of the drive is configured by default to 75° C and the error level to 80° C. In this example, everything is fine. If the drive temperature is long time above the warning level, this might result in a reduced lifetime of the drive.

11 Power Supply Requirements

11.1 Motor-Power Supply

The calculation of the needed power for the motor supply depends on the application and the used motor.

The nominal supply voltage is 72 VDC.

The possible range is from 24 to 85 VDC.



The motor supply can rise to 95 VDC when braking. This means that everything connected to that power supply needs a dielectric withstand voltage of at least 100 VDC. (Additional capacitors, etc...). Due to high braking voltage and sudden load variations of linear motor applications, **only compatible power supplies can be used (see chapter 14 Ordering Information).**

11.2 Signal-Power Supply

The logic supply needs a regulated power supply of a nominal voltage of 24 VDC. The voltage must be between 22 and 26 VDC.

Current provided from the logic-supply:

- min. 0.5 A (no load on the outputs)
- typ. 0.6 A (output "on" with 100 mA load and brake with no load)
- max. 1.5 A (output "on" with 500 mA peak load and brake with 500 mA peak load)



The 24 VDC supply for the control circuit must be protected with an external fuse (3 A slow blow)

12 Safety notes for the installation according to UL 61800-5-1



- Suitable For Use On A Circuit Capable Of Delivering Not More Than 5000 Amperes, 72 Volts DC Maximum, When Protected By A Circuit Breaker Rated Not Less Than 20 Amperes.
- Accessible parts with voltages greater than DVC A: Connectors X1 and X2
- Connections for thermal protection in or on motors:
Terminal:
 - X3 Pin 5, rated 5.15 Vdc, 10 mA
 - X3 Pin 7, rated 3.3 Vdc, 10 mA

13 Regeneration

If the motor supply voltage rises too high, the power is regenerated within the motor (no regeneration resistor is required).

14 Ordering Information

14.1 Drives

Drives	Description	Art. No.
F1050-DS-UC-0S-000	EtherCAT DS402 Drive (72V/32A)	0150-6767

14.2 Accessories

Accessories	Description	Art. No.
DC01-F1050/X1/X4	Terminal Kit X1/X4, for F1050	0150-7277
DC01-F1050/F1150/F1250/X1	Terminal Kit X1, Motor PWR 72 VDC Input	0150-7274
DC01-F1X50/C1X50/X2	Terminal Kit X2, Motor Phases	0150-3526
DC01-F1050/X4	Terminal Kit X4, 24 VDC & Logic for F1050	0150-7275
Recommended Power Supplies	Description	Art. No.
S02-72/1000	Power Supply 72V/1000W (3000W Peak), 3x400-480VAC	0150-4535
S02-72/600	Power Supply 72V/600W (1500W Peak), 120-230VAC	0150-5700
Compatible Power Supplies	Description	Art. No.
S01-72/500	Power Supply 72 V/500 W, 1x120/230 VAC	0150-1874
S01-72/1000	Power Supply 72V/1000W, 3x340-550VAC	0150-1872
T01-72/420-Multi	T-Supply 72 V / 420 VA, 3x230/400/480 VAC	0150-1869
T01-72/900-Multi	T-Supply 900 VA, 3x230/400/480 VAC	0150-1870
T01-72/1500-Multi	T-Supply 1500 VA, 3x230/400/480 VAC	0150-1871



Connectors X1 and X4 are NOT delivered together with the drive! A terminal kit must be ordered together with the drive! The plug X2 is included on the motor cable.

Attention: For UL applications, the above terminal kits must be used!

15 International Certifications

Certifications	
Europe 	See chapter 15.3 EU Declaration of Conformity CE Marking
UK 	See chapter 15.4 UK Declaration of Conformity UKCA Marking
IEC EE CB SCHEME	Ref. Certif. No. CH1-00087 See chapter 15.1 IEC EE CB SCHEME – CB Test certificate
USA / Canada  UL 61800-5-1 IND. CONT. EQ.	All products marked with this symbol are tested and listed by Underwriters Laboratories and the production facilities are checked quarterly by an UL inspector. This mark is valid for the USA and Canada and eases certification of your machines and systems in these areas. The F1050-DS-UC-3S-000 Version 1 Revision B2 (V1RB2) and higher is listed according to UL61800-5-1 and CSA C22.2 File number E316095 UL 61800-5-1 IND. CONT. EQ. CSA C22.2 See chapter 15.5 UL / CSA Listing Available from Hardware Version 1, Revision B2 (V1RB2)

15.1 IEC EE CB SCHEME – CB Test certificate

	<table border="1"> <tr> <td>Ref. Certif. No.</td> </tr> <tr> <td>CH1-00087</td> </tr> </table>	Ref. Certif. No.	CH1-00087																										
Ref. Certif. No.																													
CH1-00087																													
<table border="1"> <tr> <td>IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST CERTIFICATES FOR ELECTRICAL EQUIPMENT (IECEE) CB SCHEME</td> </tr> </table>		IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST CERTIFICATES FOR ELECTRICAL EQUIPMENT (IECEE) CB SCHEME																											
IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST CERTIFICATES FOR ELECTRICAL EQUIPMENT (IECEE) CB SCHEME																													
<table border="1"> <tr> <td colspan="2">CB TEST CERTIFICATE</td> </tr> <tr> <td>Product</td> <td>Servo Drives F-series</td> </tr> <tr> <td>Name and address of the applicant</td> <td>NTI AG, LinMot und MagSpring, Bodenaeckerstrasse 2, 8957 Spreitenbach, SWITZERLAND</td> </tr> <tr> <td>Name and address of the manufacturer</td> <td>NTI AG, LinMot und MagSpring, Bodenaeckerstrasse 2, 8957 Spreitenbach, SWITZERLAND</td> </tr> <tr> <td>Name and address of the factory</td> <td>NTI AG, LinMot und MagSpring, Bodenaeckerstrasse 2, 8957 Spreitenbach, SWITZERLAND</td> </tr> <tr> <td><i>Note: When more than one factory, please report on page 2</i></td> <td>☐ Additional Information on page 2</td> </tr> <tr> <td>Ratings and principal characteristics</td> <td>Logic: 24 VDC, max. 1.5 A Motor: 72 VDC, 32 A peak</td> </tr> <tr> <td>Trademark / Brand (if any)</td> <td></td> </tr> <tr> <td>Customer's Testing Facility (CTF) Stage used</td> <td>./.</td> </tr> <tr> <td>Model / Type Ref.</td> <td>EUT_1: F1250-MI-UC-3S-xxx EUT_2: F1150-DS-UC-3S-xxx EUT_3: F1050-DS-UC-0S-xxx</td> </tr> <tr> <td>Additional information (if necessary may also be reported on page 2)</td> <td>National Differences: EU Group Differences, US ☒ Additional Information on page 2</td> </tr> <tr> <td>A sample of the product was tested and found to be in conformity with</td> <td>IEC 61800-3:2022</td> </tr> <tr> <td>As shown in the Test Report Ref. No. which forms part of this Certificate</td> <td>EMCKP6914A</td> </tr> <tr> <td colspan="2">This CB Test Certificate is issued by the National Certification Body</td> </tr> </table>		CB TEST CERTIFICATE		Product	Servo Drives F-series	Name and address of the applicant	NTI AG, LinMot und MagSpring, Bodenaeckerstrasse 2, 8957 Spreitenbach, SWITZERLAND	Name and address of the manufacturer	NTI AG, LinMot und MagSpring, Bodenaeckerstrasse 2, 8957 Spreitenbach, SWITZERLAND	Name and address of the factory	NTI AG, LinMot und MagSpring, Bodenaeckerstrasse 2, 8957 Spreitenbach, SWITZERLAND	<i>Note: When more than one factory, please report on page 2</i>	☐ Additional Information on page 2	Ratings and principal characteristics	Logic: 24 VDC, max. 1.5 A Motor: 72 VDC, 32 A peak	Trademark / Brand (if any)		Customer's Testing Facility (CTF) Stage used	./.	Model / Type Ref.	EUT_1: F1250-MI-UC-3S-xxx EUT_2: F1150-DS-UC-3S-xxx EUT_3: F1050-DS-UC-0S-xxx	Additional information (if necessary may also be reported on page 2)	National Differences: EU Group Differences, US ☒ Additional Information on page 2	A sample of the product was tested and found to be in conformity with	IEC 61800-3:2022	As shown in the Test Report Ref. No. which forms part of this Certificate	EMCKP6914A	This CB Test Certificate is issued by the National Certification Body	
CB TEST CERTIFICATE																													
Product	Servo Drives F-series																												
Name and address of the applicant	NTI AG, LinMot und MagSpring, Bodenaeckerstrasse 2, 8957 Spreitenbach, SWITZERLAND																												
Name and address of the manufacturer	NTI AG, LinMot und MagSpring, Bodenaeckerstrasse 2, 8957 Spreitenbach, SWITZERLAND																												
Name and address of the factory	NTI AG, LinMot und MagSpring, Bodenaeckerstrasse 2, 8957 Spreitenbach, SWITZERLAND																												
<i>Note: When more than one factory, please report on page 2</i>	☐ Additional Information on page 2																												
Ratings and principal characteristics	Logic: 24 VDC, max. 1.5 A Motor: 72 VDC, 32 A peak																												
Trademark / Brand (if any)																													
Customer's Testing Facility (CTF) Stage used	./.																												
Model / Type Ref.	EUT_1: F1250-MI-UC-3S-xxx EUT_2: F1150-DS-UC-3S-xxx EUT_3: F1050-DS-UC-0S-xxx																												
Additional information (if necessary may also be reported on page 2)	National Differences: EU Group Differences, US ☒ Additional Information on page 2																												
A sample of the product was tested and found to be in conformity with	IEC 61800-3:2022																												
As shown in the Test Report Ref. No. which forms part of this Certificate	EMCKP6914A																												
This CB Test Certificate is issued by the National Certification Body																													

	EMC-Testcenter AG Moosackerstrasse 77 8105 Regensdorf SWITZERLAND	 Signature: Ulrike HIEGEMANN 
Date: 2026-06-12		



Ref. Certif. No.

CH1-00087

Additional Standards:

CISPR 11:2015 class A
CISPR 11:2015/AMD1:2016 class A
CISPR 11:2015/AMD2:2019 class A
CISPR 32:2015 class A
CISPR 32:2015/AMD1:2019 class A

Informative tested, standard not yet referenced by product standard IEC 61800-3, not in CB scope:
CISPR 11:2024 class A

Additional information (if necessary)

EMC-Testcenter AG
Moosackerstrasse 77
8105 Regensdorf
SWITZERLAND



Date: 2026-06-12

Signature: Ulrike HIEGEMANN

15.2 Summary of compliance with national differences

Country code	National differences standard
CENELEC: EU group differences	EN 55011:2016+A1:2017+A11:2020+A2:2021 class A EN IEC 55011:2025 class A ¹⁾ EN 55032:2015+A1:2020+A11:2020 class A Note ¹⁾ Informative test, standard not yet referenced by product standard EN 61800-3.
USA	FCC 47 CFR part 15 edition 2026-02-25 (e-CFR) class A ²⁾ SIP/SOP cables whose maximum length < 3 m were also considered (note b in table 8 is disregarded). Note ²⁾ Not in scope of STS 0034

15.3 EU Declaration of Conformity CE Marking

NTI AG / LinMot®

Bodenaeckerstrasse 2

8957 Spreitenbach

Switzerland

Tel.: +41 (0)56 419 91 91

Fax: +41 (0)56 419 91 92

declares under sole responsibility the compliance of the products:

- Drives of the Series **F1050-DS-UC-0S-xxx**

with the EMC Directive 2014/30/EU.

Applied harmonized standards:

- **EN 61800-3:2022**

According to the EMC directive, the listed devices are not independently operable products.

Compliance of the directive requires the correct installation of the product, the observance of specific installation guides and product documentation. This was tested on specific system configurations.

The safety instructions of the manuals are to be considered.

The product must be mounted and used in strict accordance with the installation instructions contained within the installation guide, a copy of which may be obtained from NTI AG.

Company: NTI AG

Spreitenbach, 28.03.2025



Dr. Ronald Rohner / CEO NTI AG

15.4 UK Declaration of Conformity UKCA Marking

NTI AG / LinMot®

Bodenaeckerstrasse 2

8957 Spreitenbach

Switzerland

Tel.: +41 (0)56 419 91 91

Fax: +41 (0)56 419 91 92

declares under sole responsibility the compliance of the products:

- Drives of the Series **F1050-DS-UC-0S-xxx**

with the EMC Regulation S.I. 2016 No. 1091.

Applied designated standards:

- **EN 61800-3:2022**

According to the EMC regulation, the listed devices are not independently operable products.

Compliance of the regulation requires the correct installation of the product, the observance of specific installation guides and product documentation. This was tested on specific system configurations.

The safety instructions of the manuals are to be considered.

The product must be mounted and used in strict accordance with the installation instructions contained within the installation guide, a copy of which may be obtained from NTI AG.

Company: NTI AG

Spreitenbach, 28.03.2025



Dr. Ronald Rohner / CEO NTI AG

15.5 UL / CSA Listing

Certificate of Compliance

Certificate Number(s):

UL-US-26105391-2

Report Reference:

E316095-20260601

Issue Date:

2026-08-05

Issued to:

NTI AG**Bodenaeckerstr 2, SPREITENBACH, 8957, CH**

This certificate confirms that representative samples of:

NMMS - Power Conversion Equipment**See Addendum Page for Product Designation(s).**

Have been evaluated by UL in accordance with the Standard(s) indicated on this Certificate.

UL 61800-5-1, Edition 2, Issue Date 2022-06-24

Additional Information:

See UL Product iQ® at <https://iq.ulprospector.com> for additional information.

This Certificate of Compliance indicates that representative samples of the product described in the certification report have met the requirements for UL certification. It does not provide authorization to apply the UL Mark. Only the Authorization Page that references the Follow-Up Services Procedure for ongoing surveillance provides authorization to apply the UL Mark.

Only those products bearing the UL Mark should be considered as being UL Certified and covered under UL's Follow-Up Services.

Look for the UL Certification Mark on the product.



A handwritten signature in black ink, appearing to read 'David Piecuch'.

David Piecuch

UL Mark Certification Program Manager

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact UL Solutions Customer Service at <https://www.ul.com/contact-us>.

CERTIFICATE OF COMPLIANCE

Certificate number(s): UL-US-26105391-2
Report reference: E316095-20260601
Issue Date: 2026-08-05

This is to certify that representative samples of the product as specified on this certificate were tested according to the current UL requirements.

Power Conversion Equipment

Model(s): 0150-7275, 0150-7277 *Terminal kits for drive F1050-DS-UC-0S-xxx*

Model(s): 0150-3526 *Terminal kits for drive F1050-DS-UC-0S-xxx, F1150-DS-UC-3S-xxx, F1250-MI-UC-3S-xxx*

Model(s): 0150-7274 *Terminal kits for drive F1050-DS-UC-0S-xxx, F1150-DS-UC-3S-xxx, F1250-MI-UC-3S-xxx.*

Model(s): 0150-7276, 0150-7278 *Terminal kits for drive F1150-DS-UC-3S-xxx, F1250-MI-UC-3S-xxx*

Model(s): F1050-DS-UC-0S-xxx, F1150-DS-UC-3S-xxx, F1250-MI-UC-3S-xxx *where xxx denotes any alphanumeric character*



Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact UL Solutions Customer Service at <https://www.ul.com/contact-us>.

Page 2 of 2

© 2026 UL LLC. All rights reserved.
Form-ULID-019496 – ver 1.0

Certificate of Compliance

Certificate Number(s):

UL-CA-2677491-2

Report Reference:

E316095-20260601

Issue Date:

2026-08-05

Issued to:

NTI AG**Bodenaeckerstr 2, SPREITENBACH, 8957, CH**

This certificate confirms that representative samples of:

NMMS7 - Power Conversion Equipment Certified for Canada**See Addendum Page for Product Designation(s).**

Have been evaluated by UL in accordance with the Standard(s) indicated on this Certificate.

CSA C22.2 No. 274, 2nd Ed., Issue Date: 2017-04-01

Additional Information:

See UL Product iQ® at <https://iq.ulprospector.com> for additional information.

This Certificate of Compliance indicates that representative samples of the product described in the certification report have met the requirements for UL certification. It does not provide authorization to apply the UL Mark. Only the Authorization Page that references the Follow-Up Services Procedure for ongoing surveillance provides authorization to apply the UL Mark.

Only those products bearing the UL Mark should be considered as being UL Certified and covered under UL's Follow-Up Services.

Look for the UL Certification Mark on the product.



A handwritten signature in black ink, appearing to read 'David Piecuch'.

David Piecuch

UL Mark Certification Program Manager

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact UL Solutions Customer Service at <https://www.ul.com/contact-us>.

CERTIFICATE OF COMPLIANCE

Certificate number(s): UL-CA-2677491-2
Report reference: E316095-20260601
Issue Date: 2026-08-05

This is to certify that representative samples of the product as specified on this certificate were tested according to the current UL requirements.

Power Conversion Equipment

Model(s): 0150-7275, 0150-7277 *Terminal kits for drive F1050-DS-UC-0S-xxx*

Model(s): 0150-3526 *Terminal kits for drive F1050-DS-UC-0S-xxx, F1150-DS-UC-3S-xxx, F1250-MI-UC-3S-xxx*

Model(s): 0150-7274 *Terminal kits for drive F1050-DS-UC-0S-xxx, F1150-DS-UC-3S-xxx, F1250-MI-UC-3S-xxx.*

Model(s): 0150-7276, 0150-7278 *Terminal kits for drive F1150-DS-UC-3S-xxx, F1250-MI-UC-3S-xxx*

Model(s): F1050-DS-UC-0S-xxx, F1150-DS-UC-3S-xxx, F1250-MI-UC-3S-xxx *where xxx denotes any alphanumeric character*



Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact UL Solutions Customer Service at <https://www.ul.com/contact-us>.

Page 2 of 2

© 2026 UL LLC. All rights reserved.
Form-ULID-019496 – ver 1.0

16 Version history

Version	Change	Date
1.0	Initial version	01.04.2025
1.1	Change from HC to UC (72V/32A instead of 72V/15A)	18.05.2025
1.2	13.2 compatible power supplies modified 8.2 / 7 external circuit breaker for 72VDC supply changed from 15 A to 20 A	23.01.2026
1.3	Certifications added (UL and CB) Connectors are not delivered with the drive and must be ordered separately	16.06.2026
1.4	16.5 UL and CSA Certificate updated 15.2 Names of the Terminal Kits according to the UL nomenclature 8.8 S4 CAN-Termination added	13.08.2026

ALL LINEAR MOTION FROM A SINGLE SOURCE

17 Contact information

Europe / Asia Headquarters

NTI AG - LinMot & MagSpring

Bodenaeckerstrasse 2
CH-8957 Spreitenbach
Switzerland

Sales / Administration: +41 56 419 91 91
office@linmot.com

Technical Support: +41 56 544 71 00
support@linmot.com

Web: <https://www.linmot.com>

North / South America Headquarters

LinMot USA Inc.

N1922 State Road 120, Unit 1
Lake Geneva, WI 53147
USA

Sales / Administration: 262.743.2555
usasales@linmot.com

Technical Support: 262.743.2555
usasupport@linmot.com

Web: <https://www.linmot-usa.com>

Visit <https://linmot.com/contact/> to find a distributor near you.